
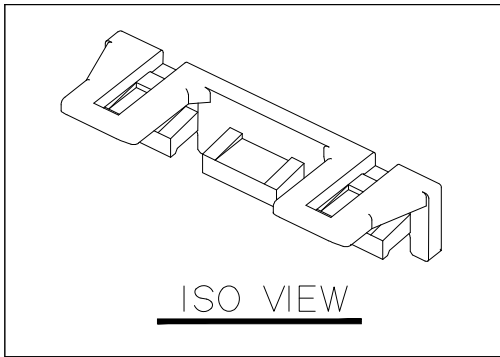
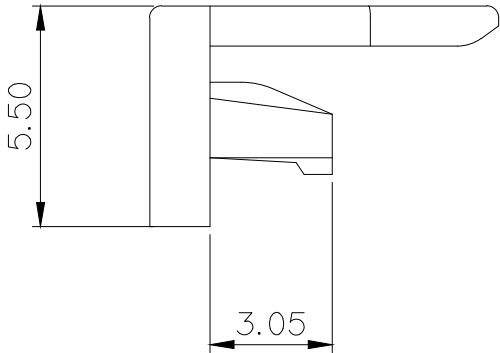
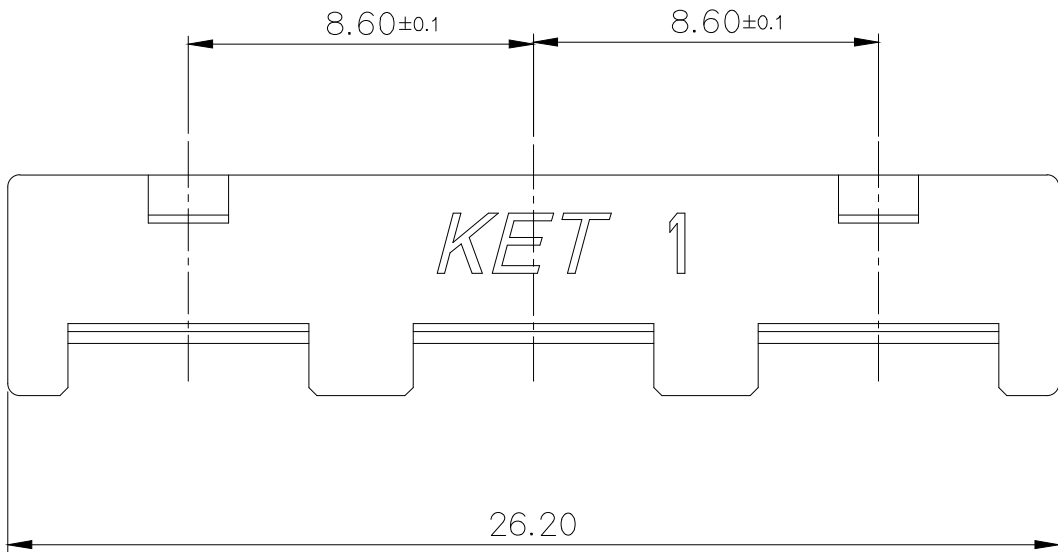


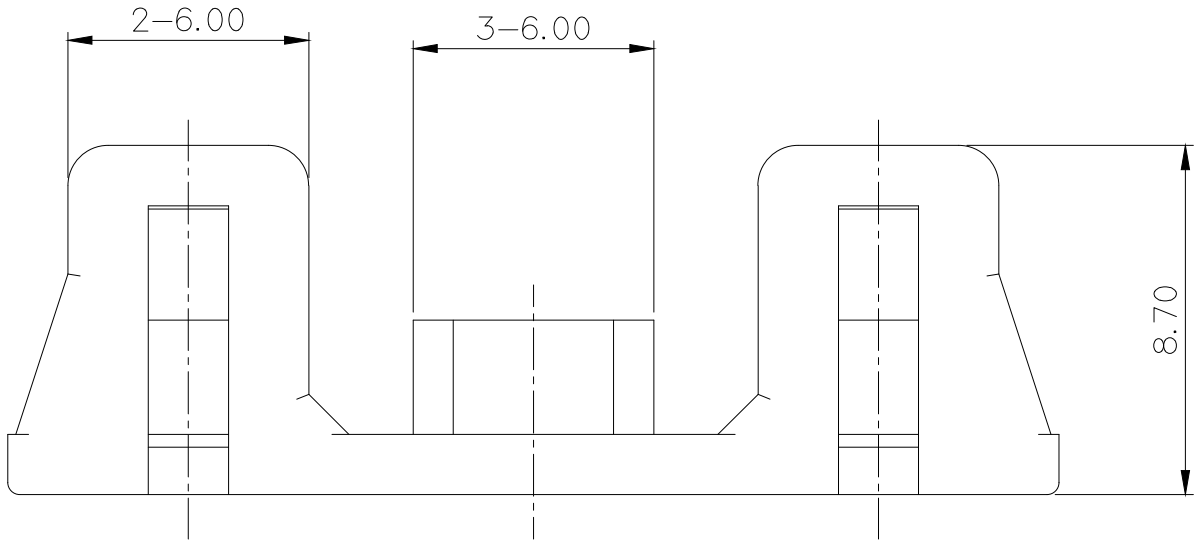

주 기

- 1.지시하지 않은 반경 R은 0.2 – 0.3로 한다.
- 2.기능상 유해한 FLASH, 수축 및 WELDLINE등이 없을것.
- 3.적용 ITEM HOUSING: MG615070
- 4.제품내 함유된 6대 유해물질 (납,수은,카드뮴,6가크롬, PBBs,PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

NOTE

- 1. UNLESS OTHERWISE SPECIFIED ALL RADIUS TO BE 0.2 – 0.3 RADIUS.
- 2. MUST BE FREE OF FLASH, SINK ,WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
- 3. APPLICABLE HOUSING : MG615070
- 4.6 HAZARDOUS SUBSTANCES IN PARTS (LEAD,MERCURY, CADMIUM,HEXAVALENT CHROMIUM,PBBs,PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE

						MATERIAL		PA66(V0)	APPROVED 2016-03-11 KOREA ELECTRIC TERMINAL CO., LTD. Electronic Product Development Team	KOREA ELECTRIC TERMINAL CO., LTD.	
						FINISH		RED			
						WIRE RANGE				CLASS	187
						INSULATION				TYPE	P-LOCK
LTR	REVISION RECORD		DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED	SEE TABLE	SCALE 5/1	PART NO.	MG635071-1
DR. KSH.'2010.05.12			CHK.			5/12	PART NAME 187 3F R/HOLDER				
CHK.			APP.			5/12					

GENERAL TOLERANCE (HOUSING)							USED ON
10 MAX	50 MAX	100 MAX	250 MAX	250 VR	ANGLE	ECCENT	
±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1	