


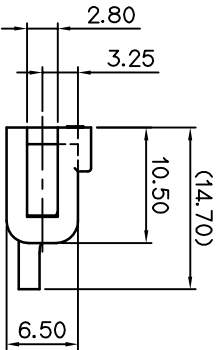
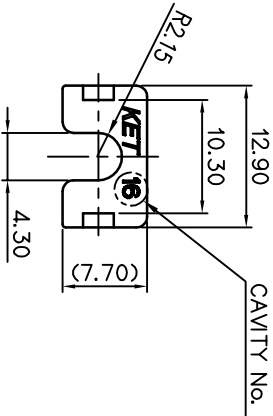


DIMENSIONS IN MM



GENERAL TOLERANCE (HOUSING)				USED ON
10MAX	20MAX	45MAX	ANGLE	ECCENT
±0.2	±0.25	±0.3	±30°	0.1

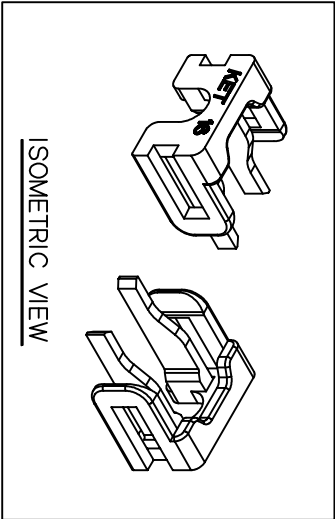

NOTE

- MUST BE FREE OF BURR, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
- APPLICABLE HOUSING : MG615077
- HAZARDOUS SUBSTANCES IN PARTS (Lead, Mercury, Cadmium, Hexavalent Chromium, PBBs, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION

주 기

- 기능상 유해한 BURR 및 WELDLINE등이 없을것.
- 적용 하우스 : MG615077
- 제품 내 함유된 6대 유해물질 (납, 수은, 카드뮴, 6가 크롬 PBBs, PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용농도를 초과해서는 안 된다.

ISSUE MARK

						MATERIAL	PA66 (V0)	KEIT KOREA ELECTRIC TERMINAL CO., LTD. [ENGINEERED]	
						FINISH	RED		
						WIRE RANGE		CLASS	
						INSULATION		TYPE	250 CONN'T
LTR	REVISION RECORD	DR	CHK	APP	DATE	REMARKS AS FORM	SEE TABLE	SCALE	PART NO.
DR	PJM '10.01.15	CHK					2/1		MG635079-1
CHK		APP				PART NAME	250 1F REAR HOLDER		