
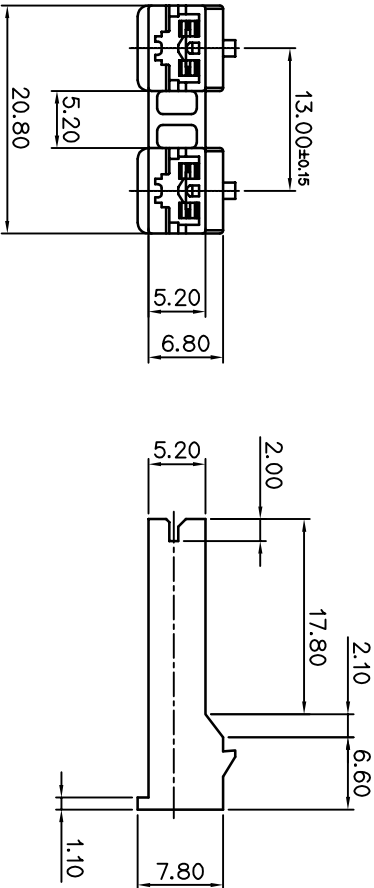
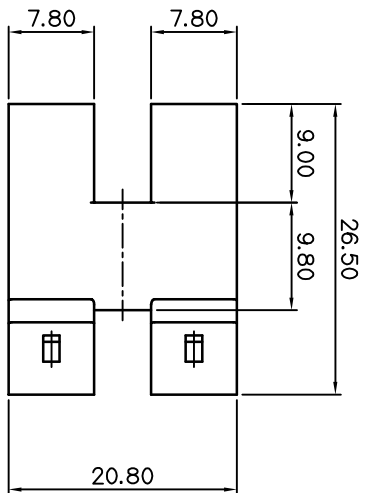


GENERAL TOLERANCE (HOUSING)						USED ON
10MAX	50MAX	100MAX	250MAX	250VR	ANGLE	ECCENT
±0.2	±0.3	±0.55	±0.95	±1.4	±30°	0.1



ISOMETRIC VIEW

주 기

1. 지시하지 않은 변경 R은 0.2~0.3로 한다
2. 기능상 유해한 BURP 및 WELDLINE등이 없을 것.
3. 적용 R/HOLDER : MG635149
- 적용 TERMINAL : ST731261,1262-3
4. 제품내 함유된 6대 유해물질 (납,수은,카드뮴,6가크롬, PBBs,PBDES)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

NOTE

1. UNLESS OTHERWISE SPECIFIED ALL RADIUS
TO BE 0.2-0.3 RADIUS.
2. MUST BE FREE OF FLASH, WELDLINE
AND IMPERFECTION THAT AFFECT FUNCTION.
3. APPLICABLE R/HOLDER : MG635149
APPLICABLE TERMINAL : ST731261,1262-3
- 4.6 HAZARDOUS SUBSTANCES IN PARTS (LEAD,MERCURY,
CADMIUM,HEXAVALENT CHROMIUM,PBBs,PBDEs) SHALL
NOT EXCEED THE MAXIMUM PERMISSIBLE

						MATERIAL	PAGE(VV)	KET KOREA ELECTRIC [ENGINEERED] TERMINAL CO., LTD.
						FINISH	RED	
						WIRE RANGE	CLASS 187	
						INSULATION	TYPE P-LOCK	
LTR	REVISION RECORD	DR. CHK.	APP.	DATE	TOLERANCE AS NOTED	SCALE	PART NO.	
DR. KSH.	2010.05.12	CHK. <i>hsh</i>		5/12		2/1	MG635148-1	
CHK.		APP. <i>hsh</i>		5/12	PART NAME NEW 187 P-LOCK 2P HOUSING(P:13mm)			