



GENERAL TOLERANCE (HOUSING)						USED ON
10 MAX	50 MAX	100 MAX	250 MAX	250 VR	ANGLE	ECCENT
±0.2	±0.3	±0.55	±0.95	±1.4	±30°	0.1



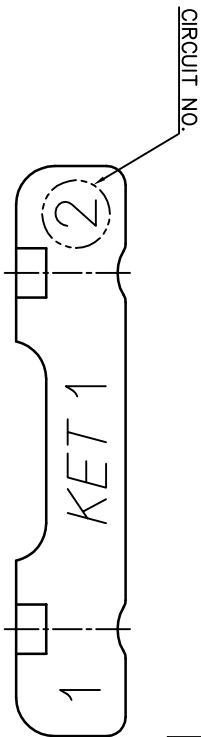


주 기

1. 1.1시 이하지 않은 변경 R은 0.2 - 0.3로 한다.
2. 2. 기능상 유해한 FLASH, 수축 및 WELDLINE 등이 없을 것.
3. 제품 ITEM HOUSING: MG63514E8-1
4. 제품상 함유된 6대 유해물질 (납,수은,카드뮴,크롬, PBBs,PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정된 최대 허용 농도를 초과해서는 안된다.

NOTE

1. UNLESS OTHERWISE SPECIFIED ALL RADIUS
TO BE 0.2 – 0.3 RADIUS.
2. MUST BE FREE OF FLASH, SINK, WELDLINE
AND IMPERFECTION THAT AFFECT FUNCTION.
3. APPLICABLE HOUSING : MG635148-1
4. 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD,MERCURY,
CADMIUM,HEXAVALENT CHROMIUM,PBBs,PBDEs) SHALL
NOT EXCEED THE MAXIMUM PERMISSIBLE
CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE

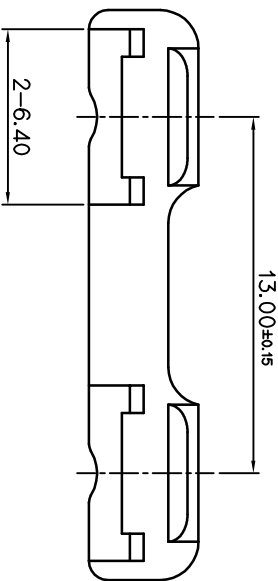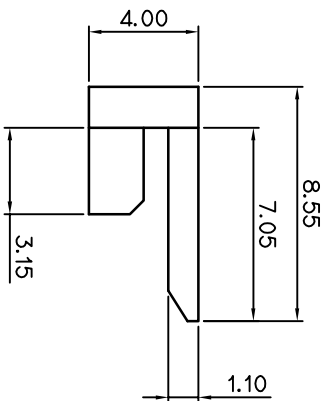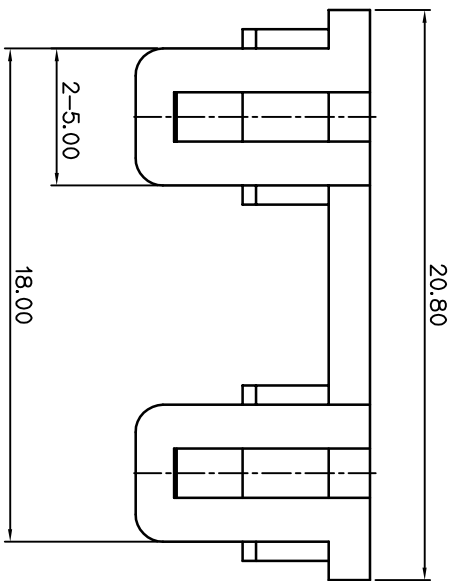

				KEI KOREA ELECTRIC ENGINEERED TERMINAL CO., LTD.	
				MATERIAL	PAGE(V0)
				FINISH	NATURAL
				WIRE RANGE	CLASS
				INSULATION	TYPE
LTR	REVISION RECORD	DR.	CHK.	APP.	DATE
DR.	KSH, '2010.05.12	CHK.	<i>100%</i>		5/12
CHK.		APP.	<i>95%</i>		5/12
				INSURANCE AS ORDER	SCALE SEE TABLE
PART NAME				187 P-LOCK 2P REAR HOLDER(P:13mm)	PART NO.
					MG635149