
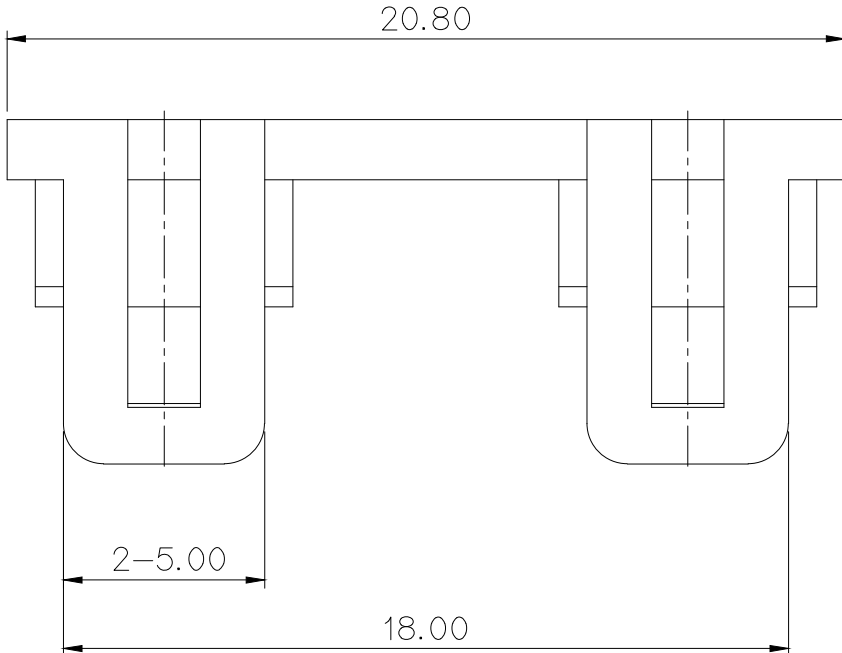
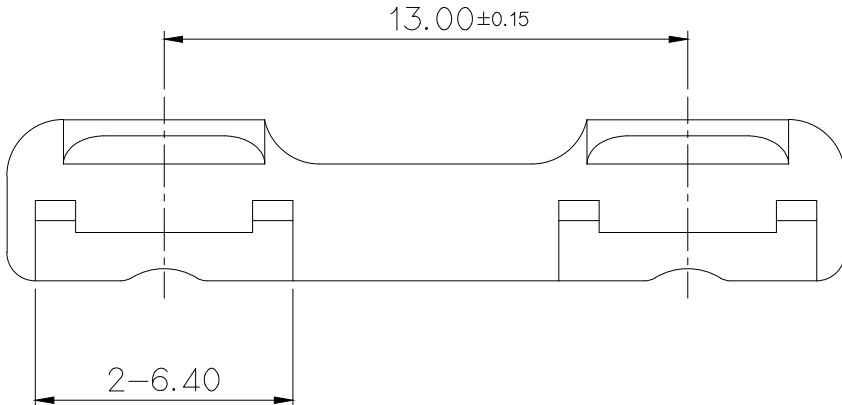
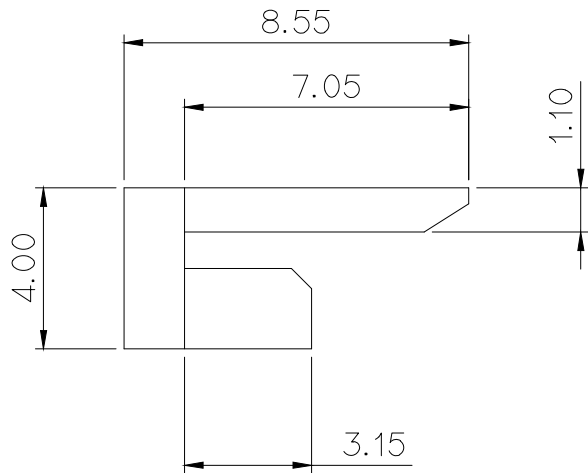


GENERAL TOLERANCE (HOUSING)							USED ON
10 MAX	50 MAX	100 MAX	250 MAX	250 VR	ANGLE	ECCENT	
±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1	

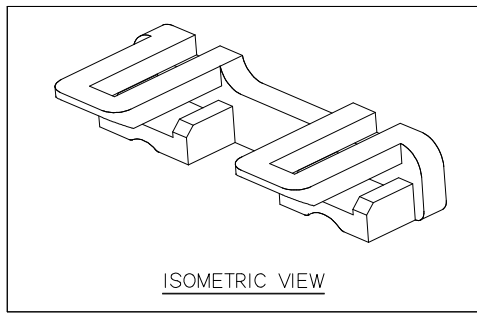

- 주 기
- 1.지시하지 않은 반경 R은 0.2 – 0.3로 한다.
 - 2.기능상 유해한 FLASH, 수축 및 WELDLINE등이 없을것.
 - 3.적용 ITEM HOUSING: MG635148-1
 - 4.제품내 함유된 6대 유해물질 (납,수은,카드뮴,6가크롬, PBBs,PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

- NOTE
- 1. UNLESS OTHERWISE SPECIFIED ALL RADIUS TO BE 0.2 – 0.3 RADIUS.
 - 2. MUST BE FREE OF FLASH, SINK ,WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
 - 3. APPLICABLE HOUSING : MG635148-1
 - 4.6 HAZARDOUS SUBSTANCES IN PARTS (LEAD,MERCURY, CADMIUM,HEXAVALENT CHROMIUM,PBBs,PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE

						MATERIAL	PA66(V0)	 KOREA ELECTRIC TERMINAL CO., LTD.
						FINISH	NATURAL	
						WIRE RANGE		
						INSULATION		
LTR	REVISION RECORD	DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED	SCALE 5/1	PART NO. MG635149
	DR. KSH.'2010.05.12	CHK.			5/12	PART NAME 187 P-LOCK 2P REAR HOLDER(P:13mm)		
	CHK.	APP.			5/12			

APPROVED

2017-08-10

KOREA ELECTRIC
TERMINAL CO., LTD.
Electronic Produc
t Development Team

ISSUE MARK