
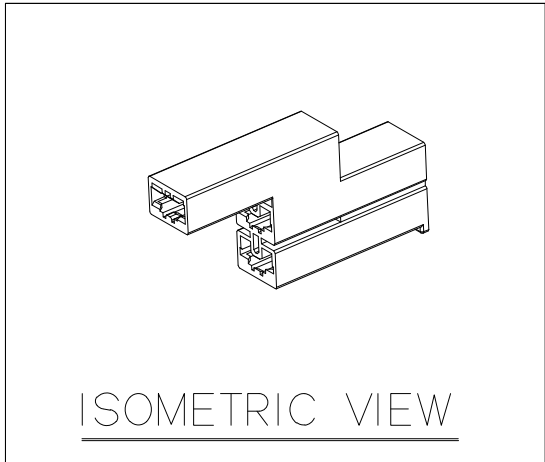
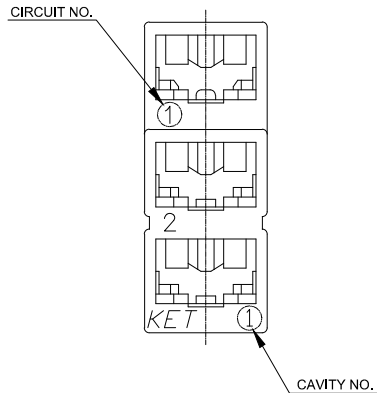
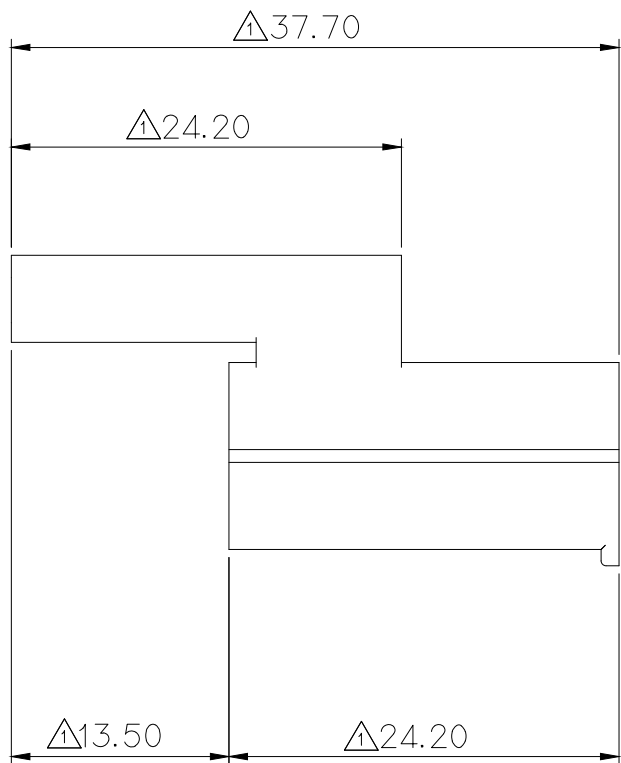
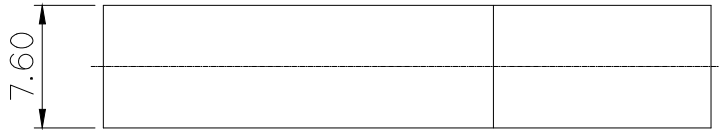


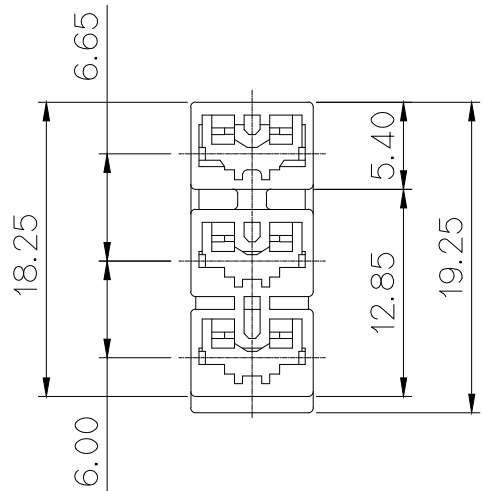

	△2	
	NO.	COLOR
*	0	NATURAL
	1	RED
*	2	BLUE
	5	BLACK

NOTE

1. MUST BE FREE OF FLASH, SINK,WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
2. APPLICABLE TERMINAL : ST730567,568-3
3. 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD,MERCURY, CADMIUM,HEXAVALENT CHROMIUM,PBBs,PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

주 기

- 1.기능상 유해한 FLASH, SINK,WELDLINE 등이 없을것.
- 2.적용 TERMINAL: ST730567,568-3
- 3.제품내 함유된 6대 유해물질 (납,수은,카드뮴,6가크롬, PBBs,PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

						MATERIAL	PA66(V0)	KETENGINEERED KOREA ELECTRIC TERMINAL CO., LTD.	
						FINISH	△ SEE TABLE		
						WIRE RANGE		CLASS	187
						INSULATION		TYPE	
						LTR	REVISION RECORD	PART NO.	
						DR.	KSH '10.03.16	MG635161	
						CHK.			
						CHK.			
						APP.			
						DATE.	'10.03.17		
						TOLERANCE EXCEPT AS NOTED	SEE TABLE	SCALE	2/1
						PART NAME		187 P-LOCK 3P HOUSING	

GENERAL TOLERANCE (HOUSING)							USED ON
10MAX	50MAX	100MAX	250MAX	250VR	ANGLE	ECCENT	
±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1	

APPROVED

2016-03-07

KOREA ELECTRIC
TERMINAL CO., LTD.
Electronic Produc
t Development Team

ISSUE MARK