

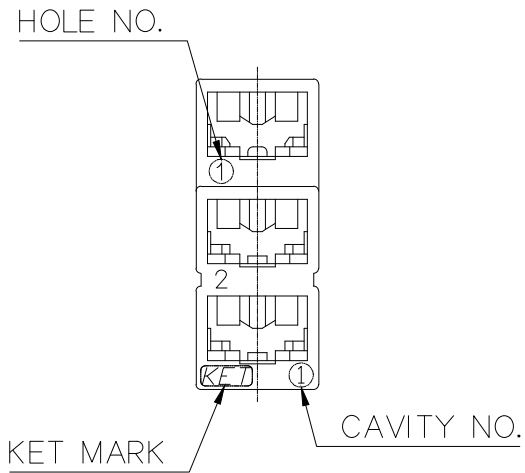
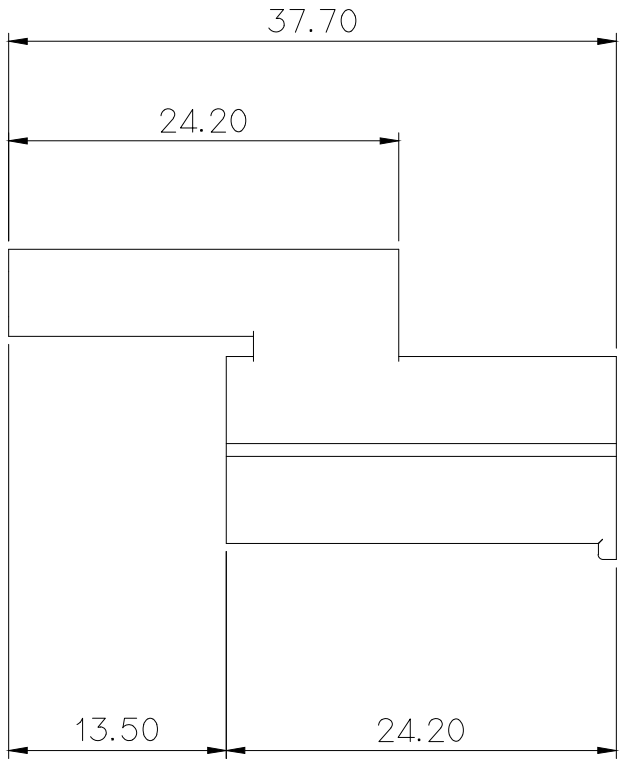
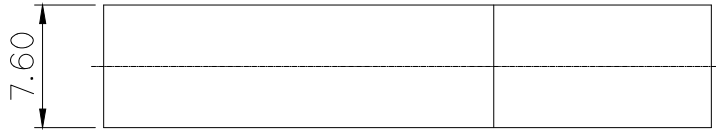


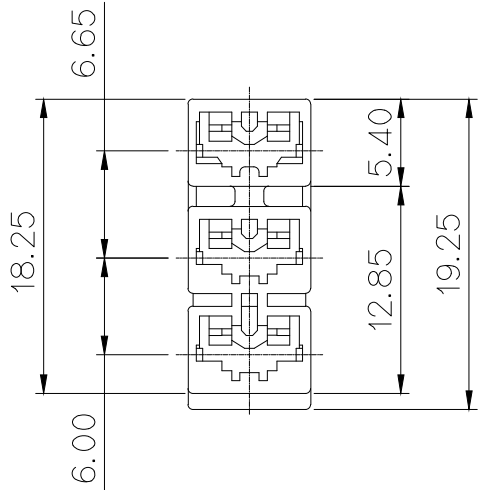

GENERAL TOLERANCE (HOUSING)					USED ON
10MAX	50MAX	100MAX	100VR	()	
±0.25	±0.35	±0.55	±0.95	±1.0	

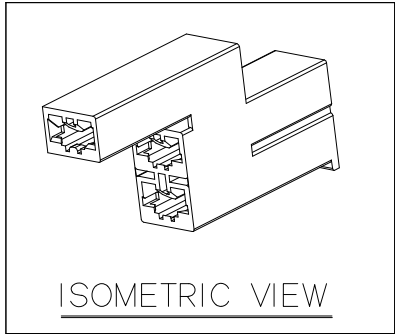

주 기

- 1.지시하지 않은 반경 R은 0.2~0.3로 한다.
- 2.기능상 유해한 BURR 및 WELDLINE등이 없을 것.
- 3.적용 TERMINAL: ST730567/0568-3/0569-3
- 4.제품내 함유된 6대 유해물질 (납,수은,카드뮴,6가크롬, PBBs,PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

NOTE

1. UNLESS OTHERWISE SPECIFIED ALL RADIUS TO BE 0.2~0.3 RADIUS.
2. MUST BE FREE OF BURR, WELD LINE AND IMPERFECTION THAT AFFECT FUNCTION.
3. APPLICABLE TERMINAL: ST730567-3/0568-3/0569-3
4. 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD,MERCURY, CADMIUM,HEXAVALENT CHROMIUM,PBBs,PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

APPROVED

2019-11-05

KOREA ELECTRIC
TERMINAL CO., LTD.
Electronic Produc
t Development Team

ISSUE MARK

PART NO. *표시는 색상 표기 임.

NO.	COLOR
* 0	NATURAL
1	RED
* 2	BLUE
3	YELLOW
5	BLACK
6	GREEN

△	ECO-1711-145 근거 도면 제작성	LCM	KSH	BUC	'17.11.13
LTR	REVISION RECORD	DR.	CHK.	APP.	DATE.
DR.	KSH '10.03.16	CHK.			
CHK.		APP.			'10.03.17

MATERIAL	PET+PC(G.W.I.T)	KET ENGINEERED	KOREA ELECTRIC TERMINAL CO., LTD.
FINISH	SEE TABLE		
WIRE RANGE		CLASS	187
INSULATION		TYPE	
TOLPRANCE EXCEPT AS NOTED	SEE TABLE	SCALE	2/1
PART NAME	187 P-LOCK 3P HOUSING		
		PART NO.	MG635161T-03