

DIMENSIONS IN MM




GENERAL TOLERANCE (HOUSING)								USED ON
10 MAX	50 MAX	100 MAX	250 MAX	250 VR	ANGLE	ECCENT		
±0.2	±0.3	±0.55	±0.95	±1.4	±30°	0.1		

주 기

1. 기능상 유해한 BURR 및 WELDLINE등이 없을것.
2. 적용 HOUSING : MG611226,611227
3. KET 문자 : 기울기 15°(H); 0.1~0.2, SIZE: 1.5)
CAVITY NO.: 기울기 0°(H); 0.1~0.2, SIZE: 1.5)

NOTE

1. MUST BE FREE OF FLASH, SINK
AND IMPERFECTION THAT AFFECT FUNCTION.
2. APPLICABLE HOUSING :MG611226,611227
3. KET MARK : TAPER 15° (H); 0.1~0.2, SIZE: 1.5)
CAVITY NO. : TAPER 0°(H); 0.1~0.2, SIZE: 1.5)

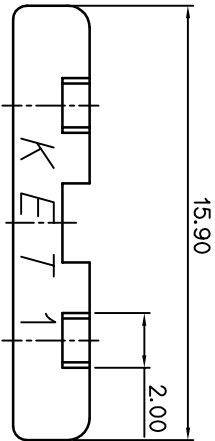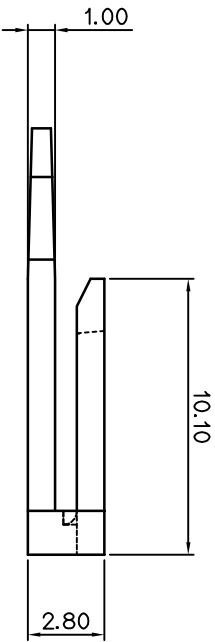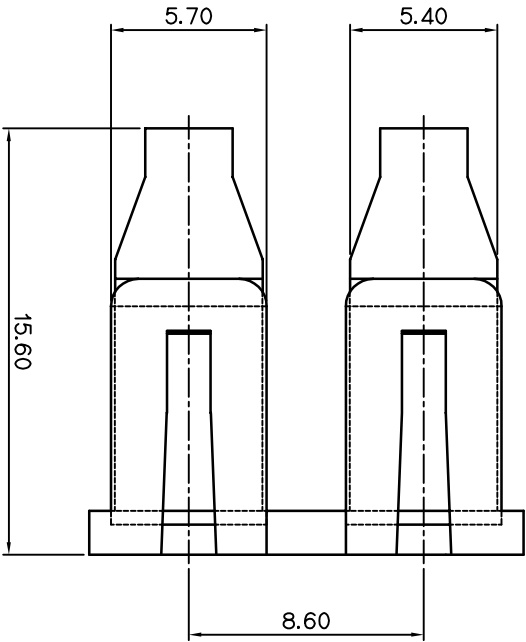

				MATERIAL		PA66		FINISH		RED		WIRE RANGE		INSULATION		CLASS		MULTI		TYPE		PART NO.		MG635178-1	
				LTR		REVISION RECORD		DR.		CHK.		DATE		INSULATION		CLASS		MULTI		TYPE		PART NO.		MG635178-1	
				DR.		KSH.		'10. 02. 19		CHK.				INSULATION		CLASS		MULTI		TYPE		PART NO.		MG635178-1	
				CHK.				'10. 02. 19		APP.		'10. 02. 19		INSULATION		CLASS		MULTI		TYPE		PART NO.		MG635178-1	
				PART NAME		0709 MULTI 2P REAR HOLDER																			

ISSUE MARK