
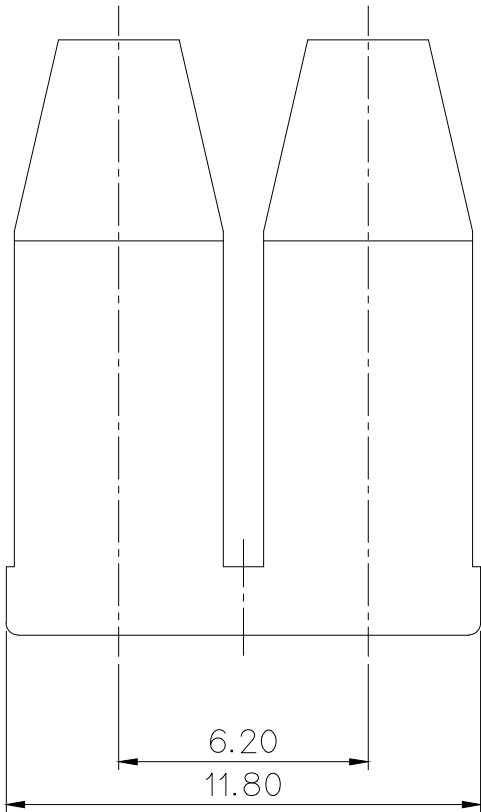
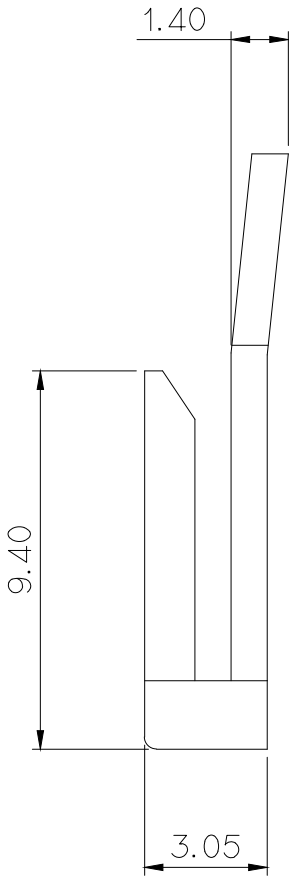
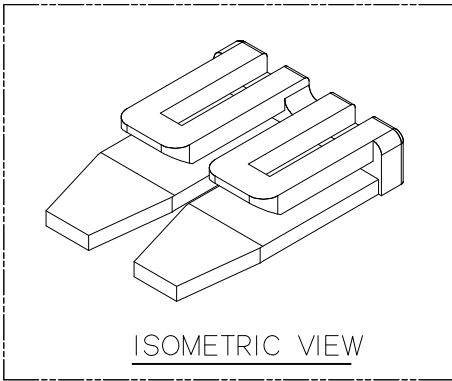
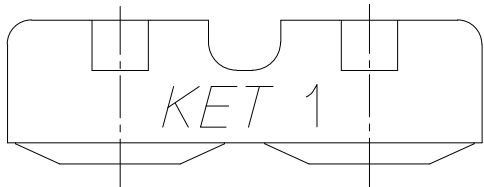
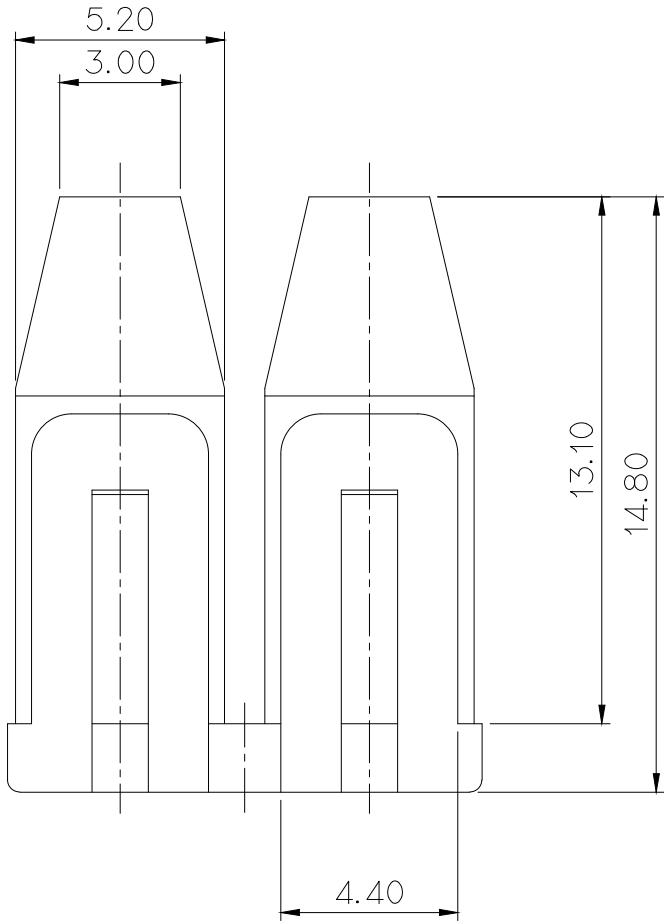


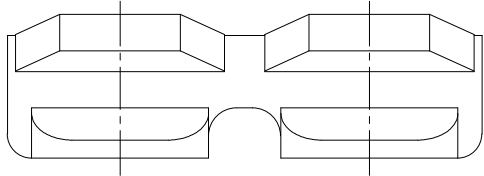

△ GENERAL TOLERANCE (HOUSING)					USED ON
10MAX	50MAX	100MAX	100VR	()	
±0.25	±0.35	±0.55	±0.95	±1.0	

주 기

- 기능상 유해한 BURR 및 WELDLINE등이 없을것.
- 적용 HOUSING : MG615304,625305,625306,
MG615304T,625305T,625306T
MG615310,625311,625312,625316
MG615310T,625311T,625312T,625316T

- △ 3.제품 내 함유된 10대 유해물질 (납, 수은, 카드뮴, 6가 크롬 PBBs, PBDEs, DEHP, DBP, BBP, DIBP)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용농도를 초과해서는 안 된다.

NOTE

- MUST BE FREE OF FLASH, SINK AND IMPERFECTION THAT AFFECT FUNCTION.
- APPLICABLE HOUSING :MG615304,625305,625306,
MG615304T,625305T,625306T
MG615310,625311,625312,625316
MG615310T,625311T,625312T,625316T
- △ 3. 10 HAZARDOUS SUBSTANCES IN PARTS (Lead, Mercury, Cadmium, Hexavalent Chromium, PBBs, PBDEs, DEHP, DBP, BBP, DIBP) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

△	NO.	COLOR
*	0	NATURAL
*	1	RED
*	2	BLUE
*	3	YELLOW
	4	GRAY
	5	BLACK
	6	GREEN



ISSUE MARK

						MATERIAL		NYLON66[UL94 V2]	 KOREA ELECTRIC TERMINAL CO., LTD.
						FINISH		△ SEE TABLE	
						WIRE RANGE		CLASS	
△2	ECO-2106-062 근거 도면 재작성	SCW	PSH	KSH	'21.06.03	INSULATION		TYPE	
△1	ECO-1907-035 근거 도면 재작성	YHJ	KSH	KHG	'19.07.02				
LTR	REVISION RECORD	DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED	SEE TABLE	SCALE 5/1	PART NO. MG635317
DR. KSH. '10. 12. 28		CHK.							
CHK.		APP.		NEW 070 MULTI-2P R/HOLDER					