
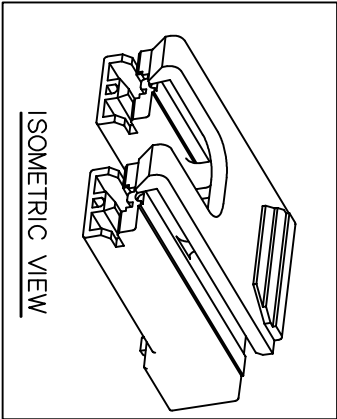
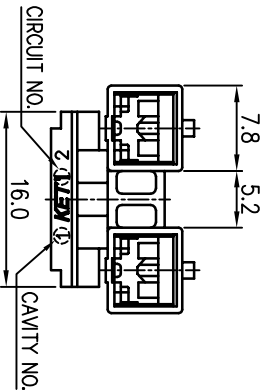

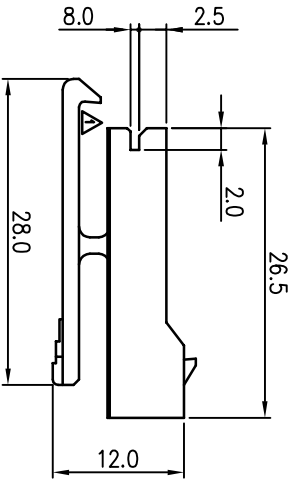


GENERAL TOLERANCE (HOUSING)					USED ON
10MAX	20MAX	45MAX	ANGLE	ECCENT	
±0.2	±0.25	±0.3	±30°	0.1	

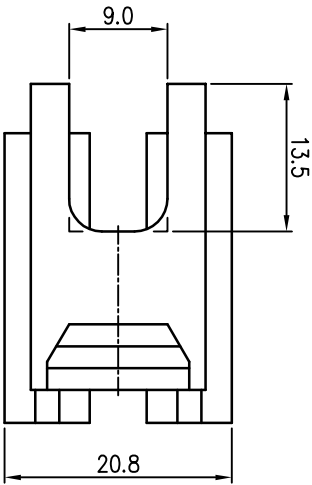

NOTE

1. MUST BE FREE OF BURR, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
2. APPLICABLE R/HOLDER : MG635149-1
3. APPLICABLE TERMINAL : ST731261,1262-3
4. 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD,MERCURY, CADMIUM,HEXAVALENT CHROMIUM,PBBs,PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION. PRESCRIBED UNDER EU ELV DIRECTIVE & ROHS REGULATION.

주 기

- 1.기능상 유해한 FLASH, SINK,WELDLINE 등이 없을것.
- 2.적용 REAR HOLDER: MG635149
- 3.적용 TERMINAL: ST731261,1262-3
- 4.제품내 함유된 6대 유해물질 (납,수은,카드뮴,6가크롬, PBBs,PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

				MATERIAL		PBT (V0)		KEI KOREA ELECTRIC [ENGINEERED] TERMINAL CO., LTD.	
				FINISH		RED			
				WIRE RANGE				CLASS	
				INSULATION				187	
				SCALE		772P		P-LOCK	
				TOLERANCE SEE TABLE		2/1		PART NO.	
								MG635371	
				PART NAME				187 P-LOCK 2P HOUSING (P:13mm)	
				CHK.		APP.			
				DIR.		CHK.			
				LTR		REV			
				ECR-1109-1044		KSH		11.09.08	
				REVISION RECORD		DIR.		CHK.	
				LCM '11.01.07		CHK.			
				CHK.		APP.			