

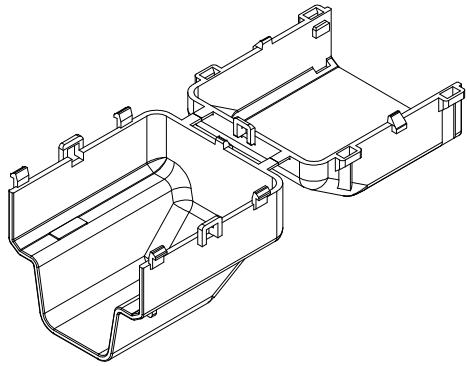
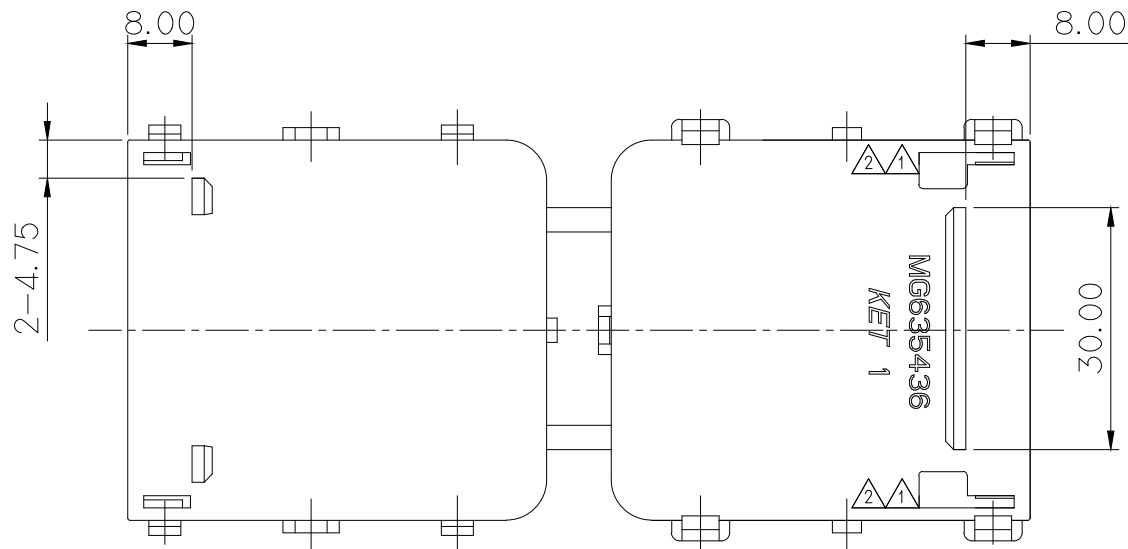
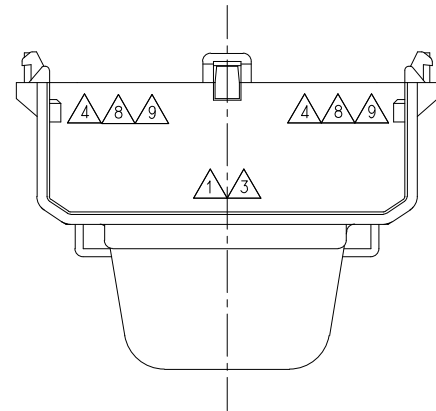
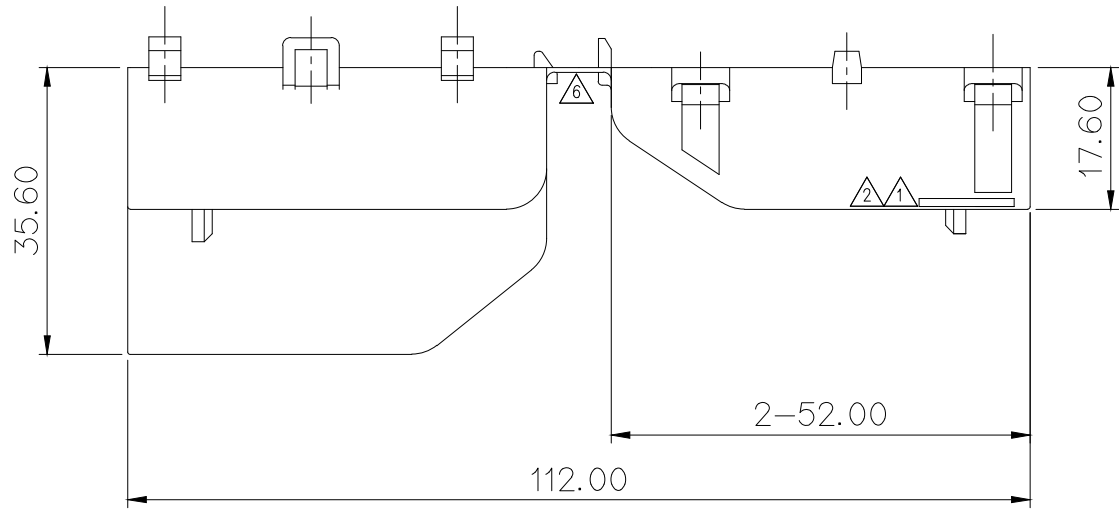


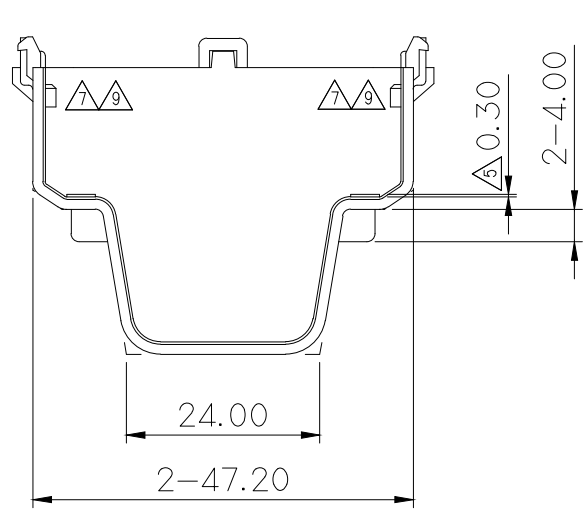

ISO VIEW

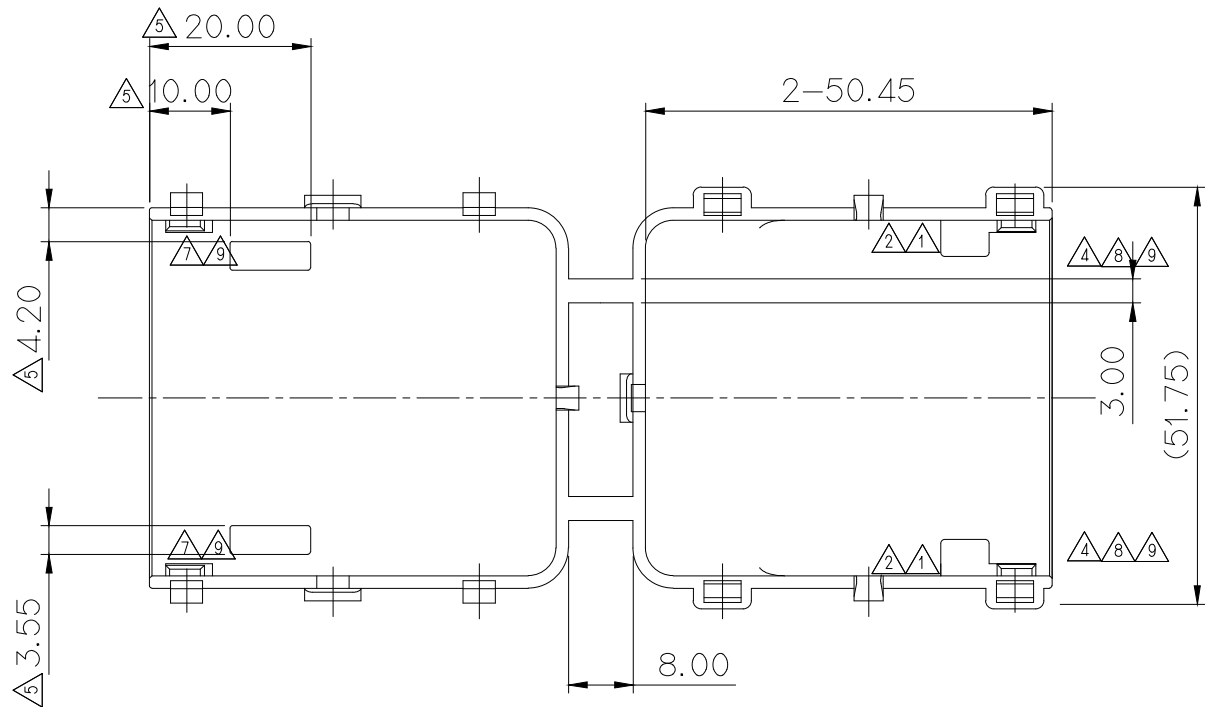

NO.	MATERIAL	COLOR
0	P.P : HP900	NATURAL
1		RED
2		BLUE
20		JADE
3		YELLOW
* 4		GRAY
40		DARK GRAY
41		LIGHT GRAY
* 5		BLACK
6		DARK GREEN
7		BROWN
8		LIGHT GREEN
9		MAGENTA
11		ORANGE

GENERAL TOLERANCE (HOUSING)							USED ON
10MAX	50MAX	100MAX	250MAX	250VR	ANGLE	ECCENT	
±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1	

NOTE

- MUST BE FREE OF FLASH, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
- APPLICABLE CONNECTOR : MG645433
- 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD,MERCURY, CADMIUM,HEXAVALENT CHROMIUM,PBBs,PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

주 기

- 기능상 유해한 BURR 및 WELDLINE 등이 없을 것.
- 적용 CONNECTOR : MG645433
- 제품내 함유된 6대 유해물질 (납,수은,카드뮴,6가크롬, PBBs,PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

APPROVED

2016-02-26

KOREA ELECTRIC
TERMINAL CO., LTD.
Connector Develop
ment Team 1

ISSUE MARK

KET KOREA ELECTRIC
ENGINEERED TERMINAL CO., LTD.

9	ECO-1506-039 근거 도면 제작성	KCS	HYJ	LSY	'15.06.02	
8	ECO-1505-308 근거 도면 제작성	KCS	HYJ	LSY	'15.05.27	
7	ECO-1403-049에 근거 도면 제작성	KJY	CWK	HJB	'14.03.07	
6	ECO-1212-284에 근거 도면 제작성	KJH	CSH	CWK	13.12.27	
LTR	REVISION RECORD	DR.	CHK.	CHK.	APP.	DATE

9	ECO-1308-026 근거 도면 제작성	KJH	CSH	CWK	13.08.06
4	ECO-1306-019에 근거 도면 제작성	YM.K	CSH	HSH	13.06.04
3	ECO-1303-155에 근거 도면 제작성	KJH	CSH	HSH	13.03.22
2	ECO-1210-107에 근거 도면 제작성	YM.K	CSH	HSH	12.10.17
1	ECO-1209-086에 근거 도면 제작성	YM.K	CSH	HSH	12.09.14
LTR	REVISION RECORD	DR.	CHK.	APP.	DATE
DR.	KMH	2010.12.24	CHK.		
CHK.	CWK		APP.	KKJ	

MATERIAL	SEE TABLE	KET KOREA ELECTRIC ENGINEERED TERMINAL CO., LTD.
FINISH	SEE TABLE	
WIRE RANGE		CLASS HYBRID
INSULATION		TYPE 025/060/110/250
TOLERANCE EXCEPT AS NOTED	SEE TABLE	PART NO. MG635436
SCALE	1/1	
PART NAME	025060110250 58M WIRE COVER	