
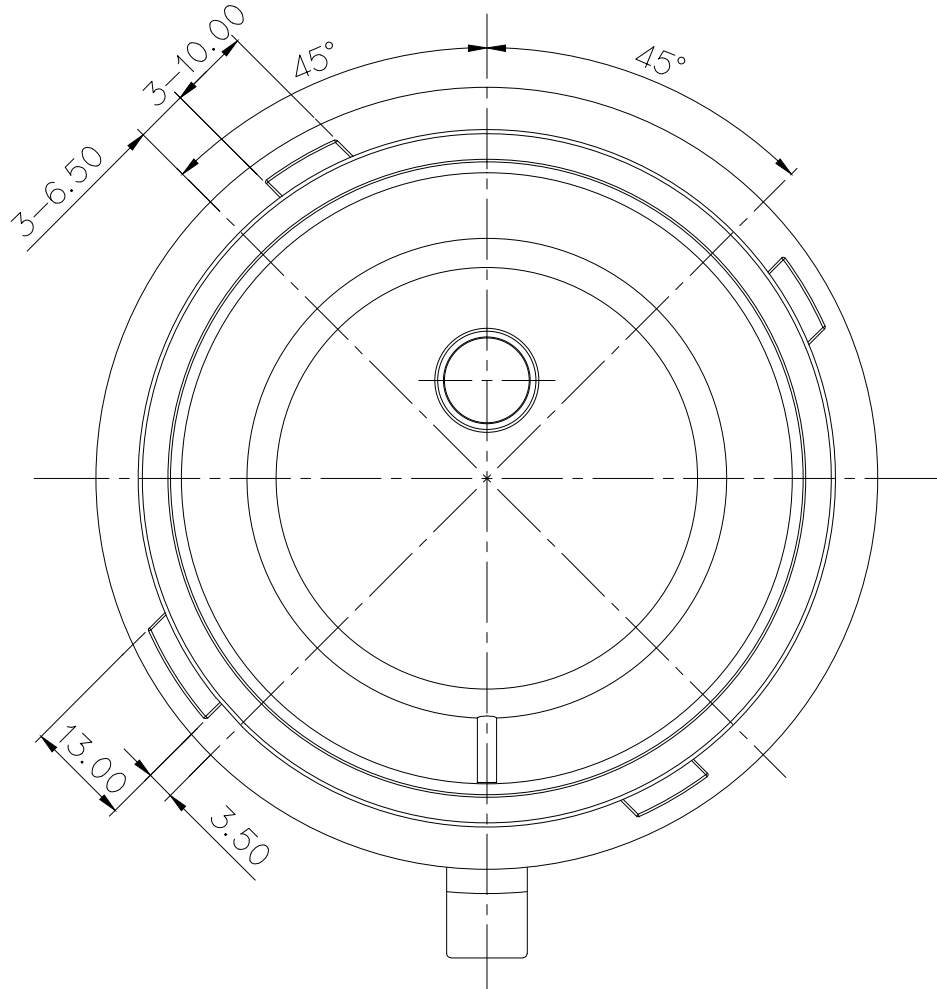
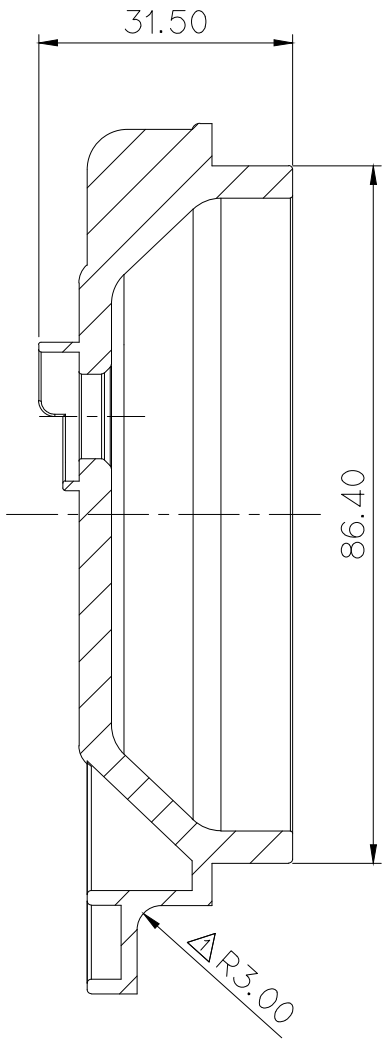
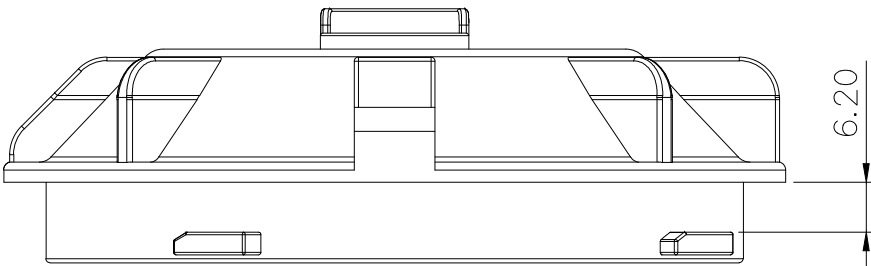
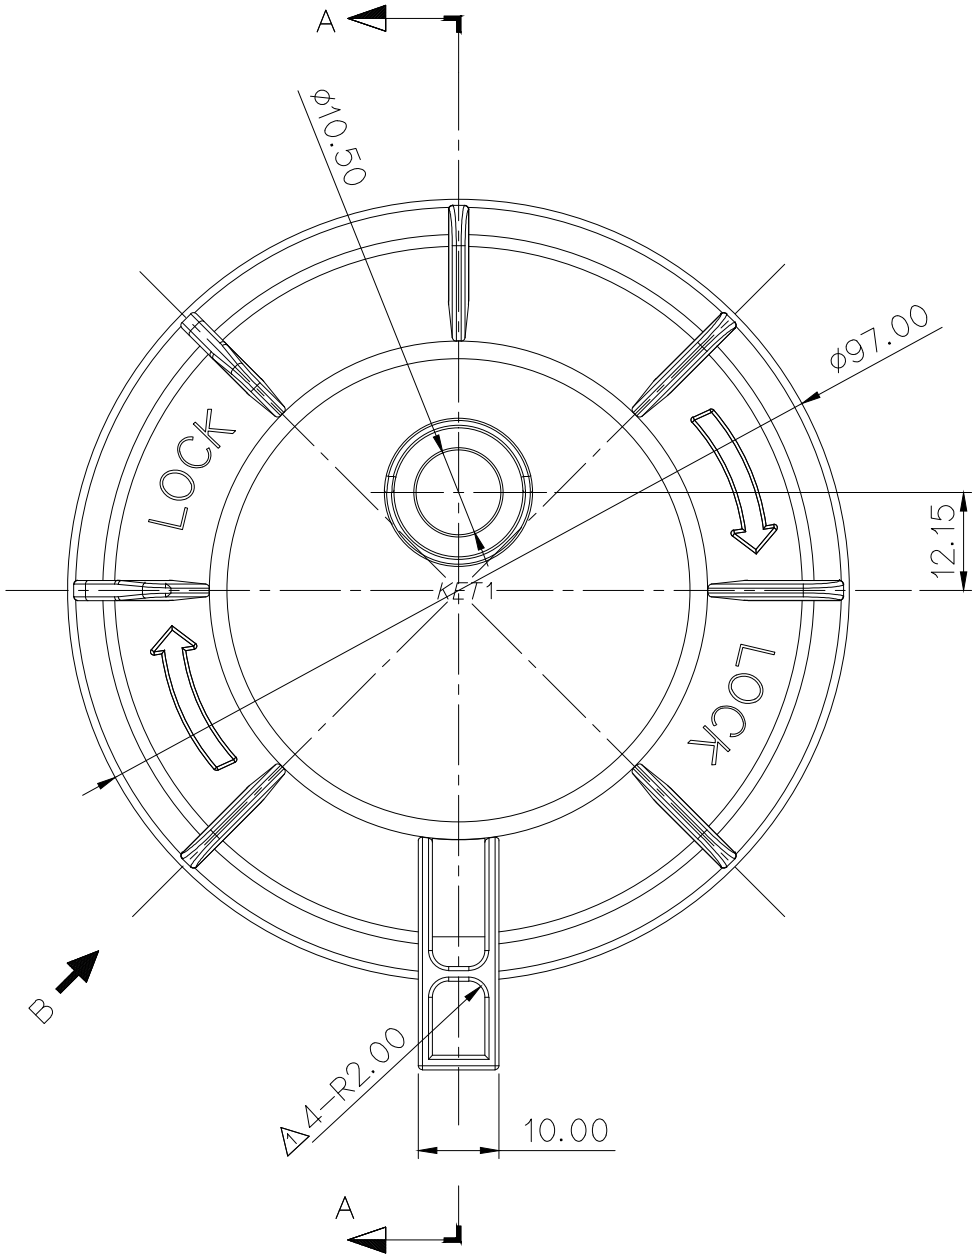
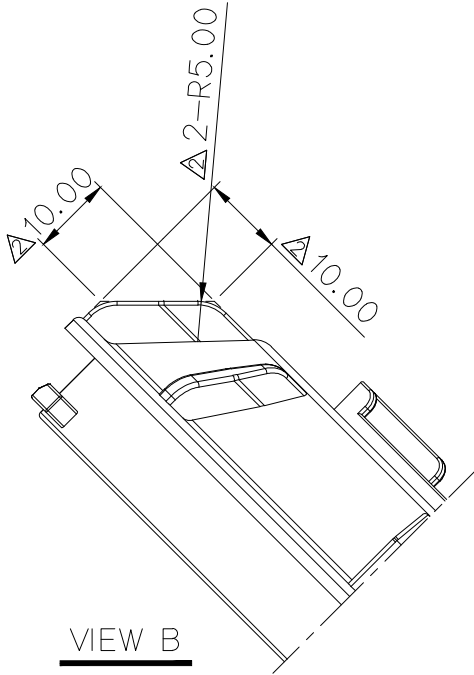
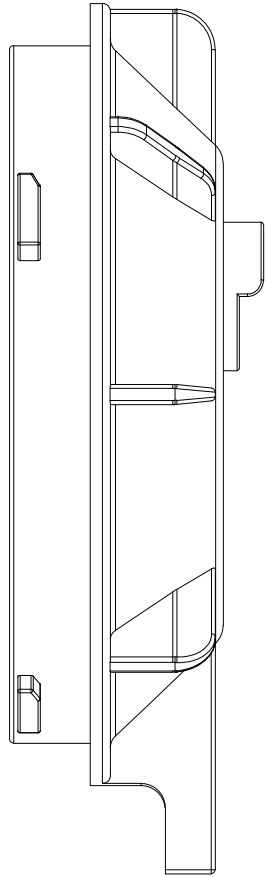
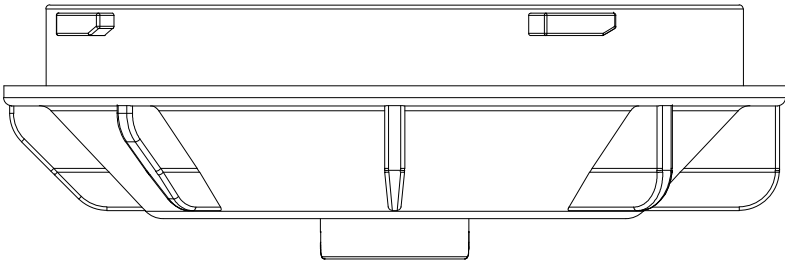


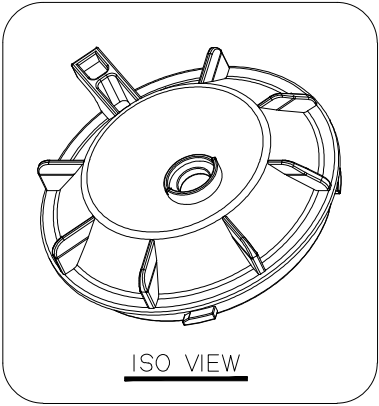

NOTE

- UNLESS OTHERWISE SPECIFIED ALL RADII TO BE 0.3 RADIUS.
- APPLICABLE OF SEAL GASKET : MG685492
- 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD, MERCURY, CADMIUM, HEXAVALENT CHROMIUM, PBBs, PBDEs) SHALLNOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION. PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

						MATERIAL		PP+T30	 KOREA ELECTRIC TERMINAL CO., LTD.	
						FINISH		BLACK		
						WIRE RANGE			CLASS	
						INSULATION			TYPE	
	램프 하우징 조립시 와이어 간섭부 CUT		HYJ	JYS	CWK	11.11.21				
	제품 파손에 의한 살보강		HYJ	JYS	KKJ	11.09.22				
LTR	REVISION RECORD		DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED	SEE TABLE	SCALE 1/1	PART NO. MG635490
DR.	YJH	11.01.05	CHK.				PART NAME			
CHK.	JYS	11.01.05	APP.			KKJ	11.01.05			
DUST COVER HOUSING										

GENERAL TOLERANCE (HOUSING)							USED ON
10MAX	50MAX	100MAX	250MAX	250VR	ANGLE	ECCENT	
±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1	

주 기

- 지시하지 않은 반경 R은 0.3 로 한다
- 적용 SEAL GASKET : MG685492
- 제품내 함유된 6대 유해물질 (납, 수은, 카드뮴, 6가크롬, PBBs, PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

APPROVED

2016-03-07

KOREA ELECTRIC
TERMINAL CO., LTD.
Product Developme
nt Team 1

ISSUE MARK