
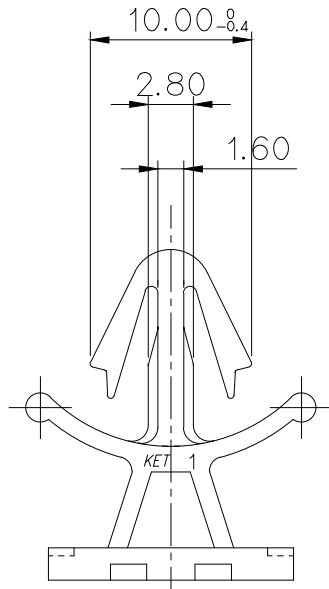
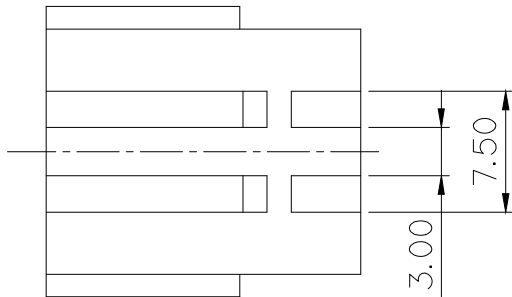
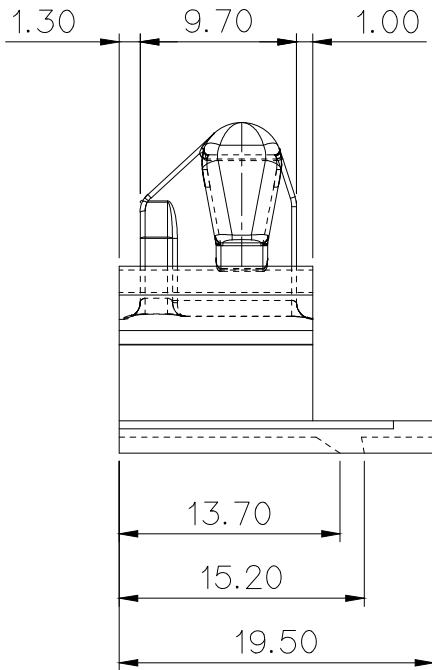
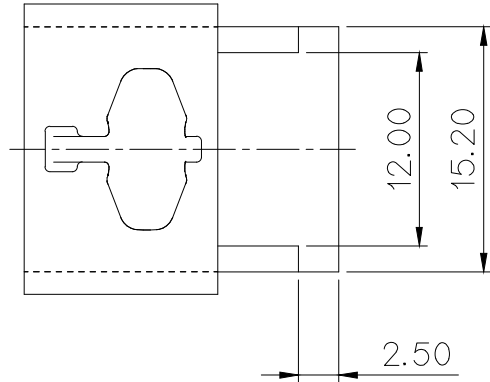
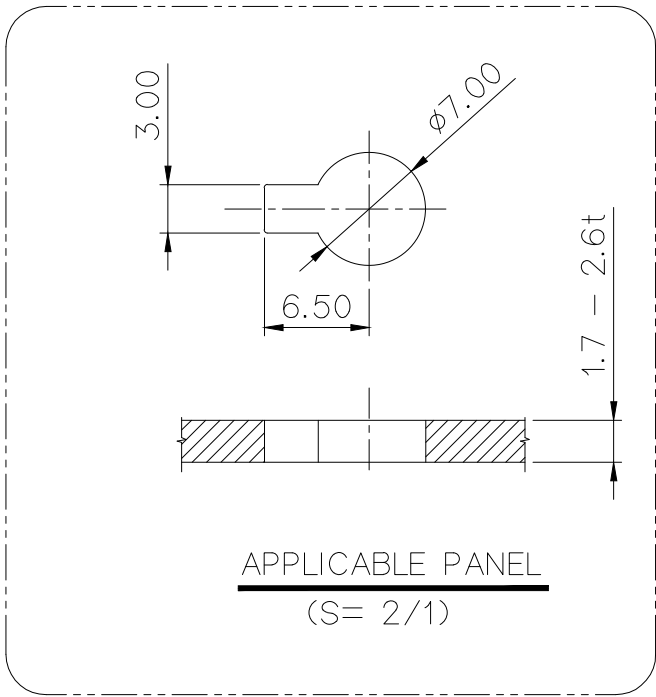
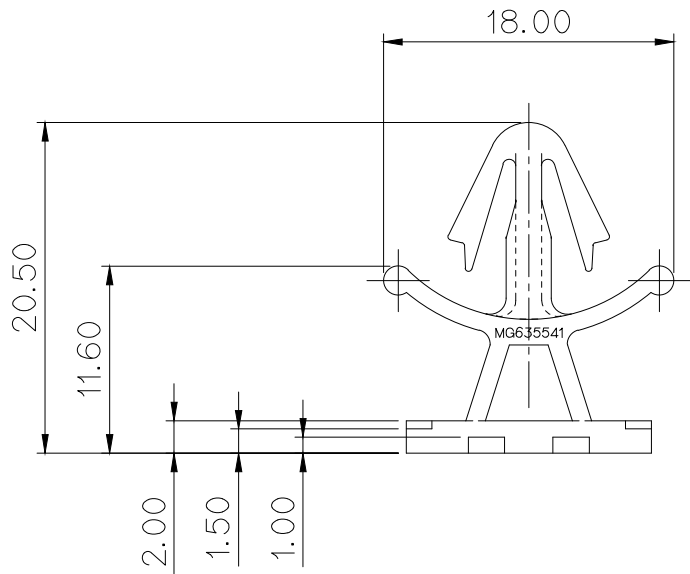


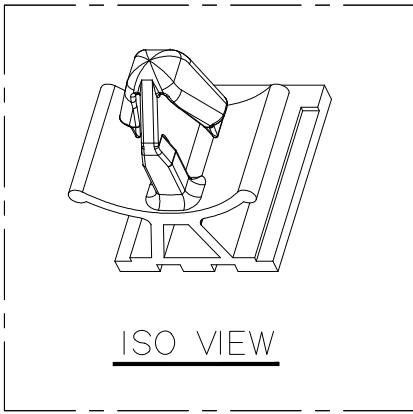

GENERAL TOLERANCE (HOUSING)							USED ON
10MAX	50MAX	100MAX	250MAX	250VR	ANGLE	ECCENT	
±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1	

주 기

- 기능상 유해한 BURR 및 WELDLINE 등이 없을 것.
- CLIP HOUSING 삽입력 : 12 kgf 이하
이탈력 : 15 kgf 이상
- 적용 HOUSING : 110 250 WP SERIES
- 제품내 함유된 6대 유해물질 (납, 수은, 카드뮴, 6가크롬, PBBs, PBDEs)은 EU ELV 지침 및 RoHS 법규에서
지정한 최대 허용 농도를 초과해서는 안된다.

NOTE

- MUST BE FREE OF BURR, WELDLINE
AND IMPERFECTION THAT AFFECT FUNCTION.
- CLIP HOUSING INSERTION FORCE : 12 kgf MAX
RERENTION FORCE : 15 kgf MIN
- APPLICABLE HOUSING : 110 250 WP SERIES
- 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD, MERCURY, CADMIUM, HEXAVALENT CHROMIUM, PBBs, PBDEs) SHALL
NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION
PRESCRIBED UNDER EU ELV DIRECTIVE

APPROVED

2018-12-07

KOREA ELECTRIC
TERMINAL CO., LTD.
Product Developme
nt Team 1

ISSUE MARK

					MATERIAL		PA66	 KOREA ELECTRIC TERMINAL CO., LTD.				
					FINISH		BROWN					
					WIRE RANGE		CLASS		1.7 – 2.6t			
					INSULATION		TYPE					
LTR	REVISION RECORD		DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED	SEE TABLE	SCALE	2/1	PART NO.	MG635541
DR. CKY 2011/06/08			CHK.	JYS	2011.06.08		PART NAME					
CHK.			APP.	KKJ	2011.06.08		110250 WP ø7 CLIP(KEY HOLE)					