
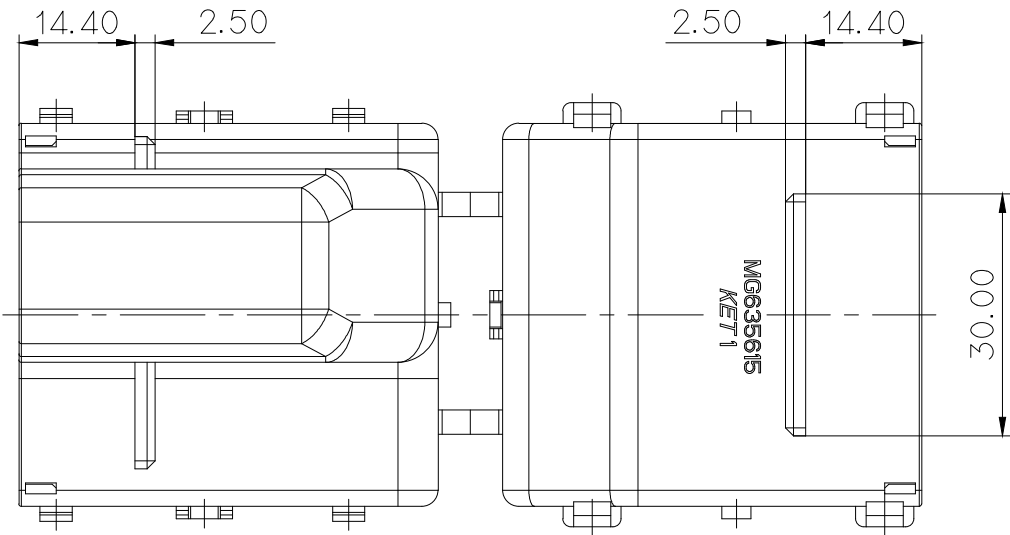
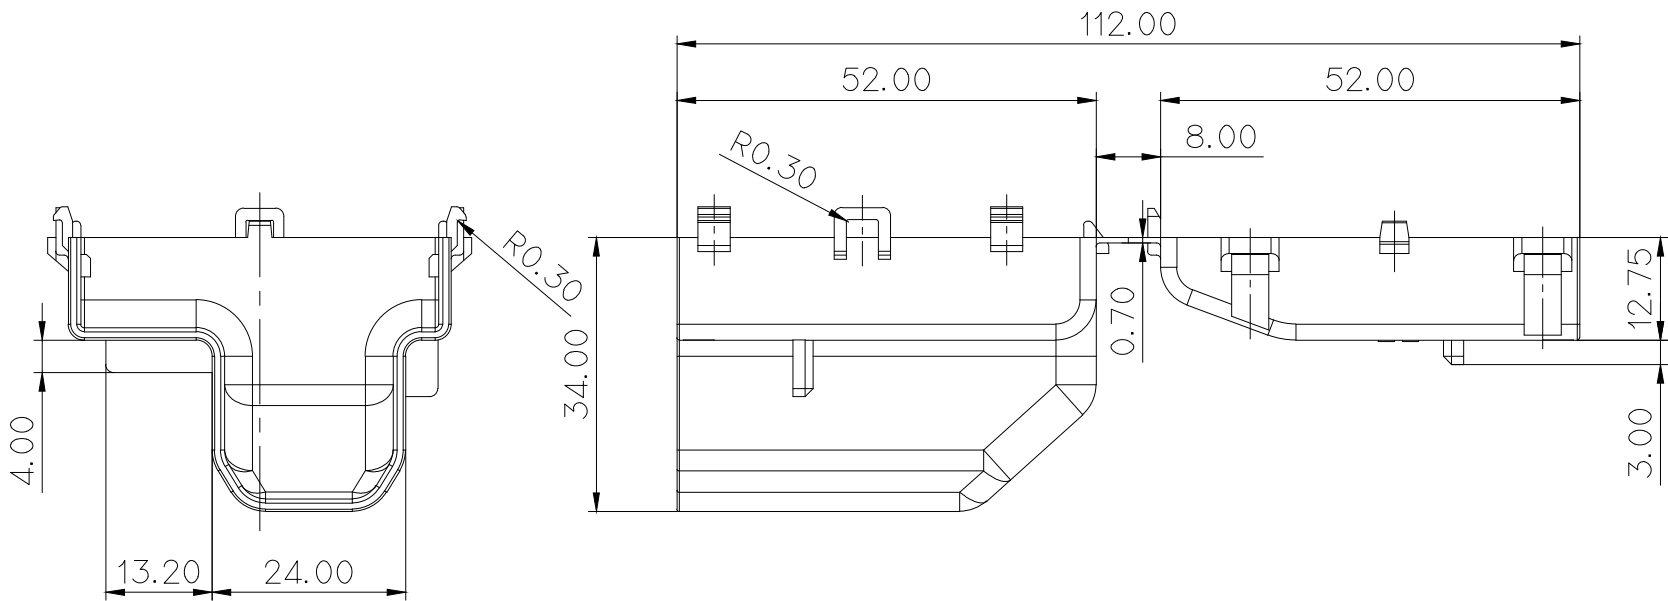
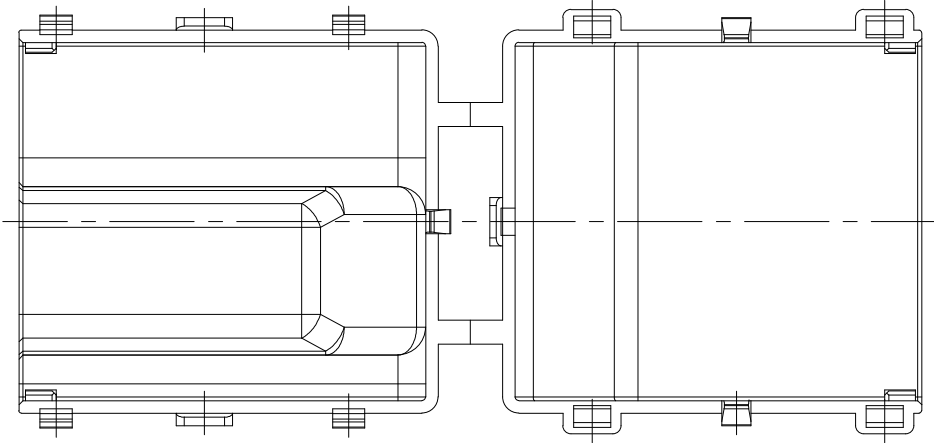


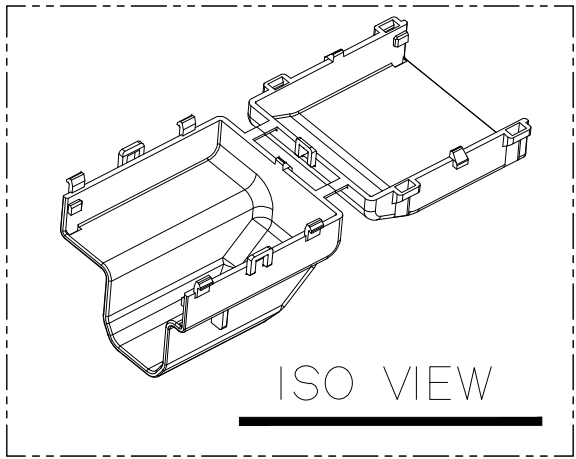


GENERAL TOLERANCE (HOUSING)							USED ON
10MAX	50MAX	100MAX	250MAX	250VR	ANGLE	ECCENT	
±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1	

주 기

- 기능상 유해한 BURR 및 WELDLINE등이 없을것.
- 적용 HOUSING ASSY : MG645741
- 제품내 함유된 6대 유해물질 (납,수은,카드뮴,6가크롬, PBBs,PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

NO.	MATERIAL	COLOR
0	P.P	NATURAL
1		RED
2		BLUE
3		YELLOW
* 4		GRAY
40		DARK GRAY
41		LIGHT GRAY
* 5		BLACK
6		DARK GREEN
7		BROWN
8		LIGHT GREEN
9		MAGENTA
11		ORANGE

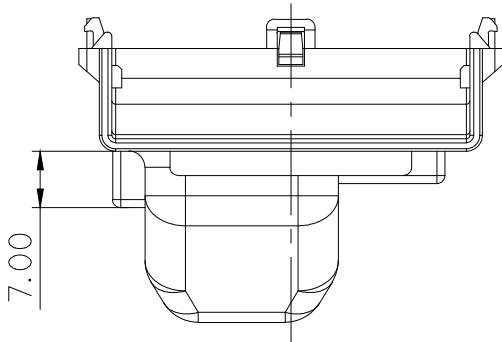

NOTE

- MUST BE FREE OF BURR, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
- MATCHING HOUSING ASSY : MG645741
- 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD,MERCURY, CADMIUM,HEXAVALENT CHROMIUM,PBBs,PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

						MATERIAL		SEE TABLE	 KOREA ELECTRIC TERMINAL CO., LTD.	
						FINISH		SEE TABLE		
						WIRE RANGE		CLASS		HYBRID
						INSULATION		TYPE		025/060/250
LTR	REVISION RECORD		DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED	SCALE 1/1	PART NO.	MG635615
DR.	CJH	2012.06.07	CHK.				PART NAME			
CHK.	CSH	2012.06.12	APP.	HSH	2012.06.12	025060250 50M WIRE COVER				

APPROVED

2016-03-07

KOREA ELECTRIC
TERMINAL CO., LTD.
Product Developme
nt Team 1

ISSUE MARK