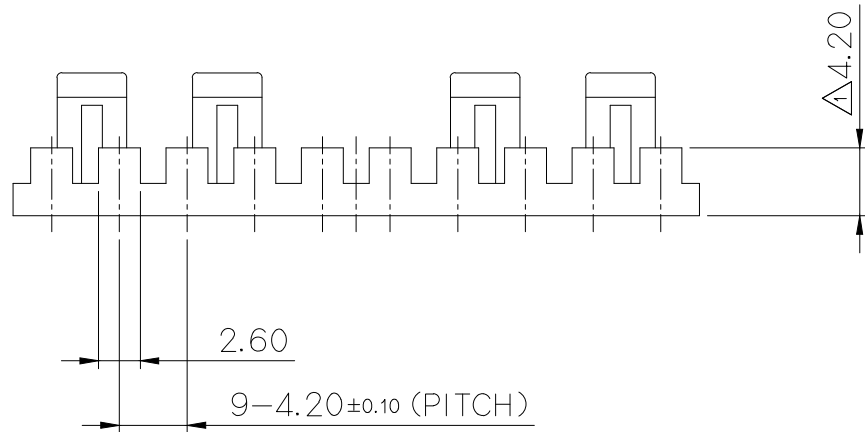

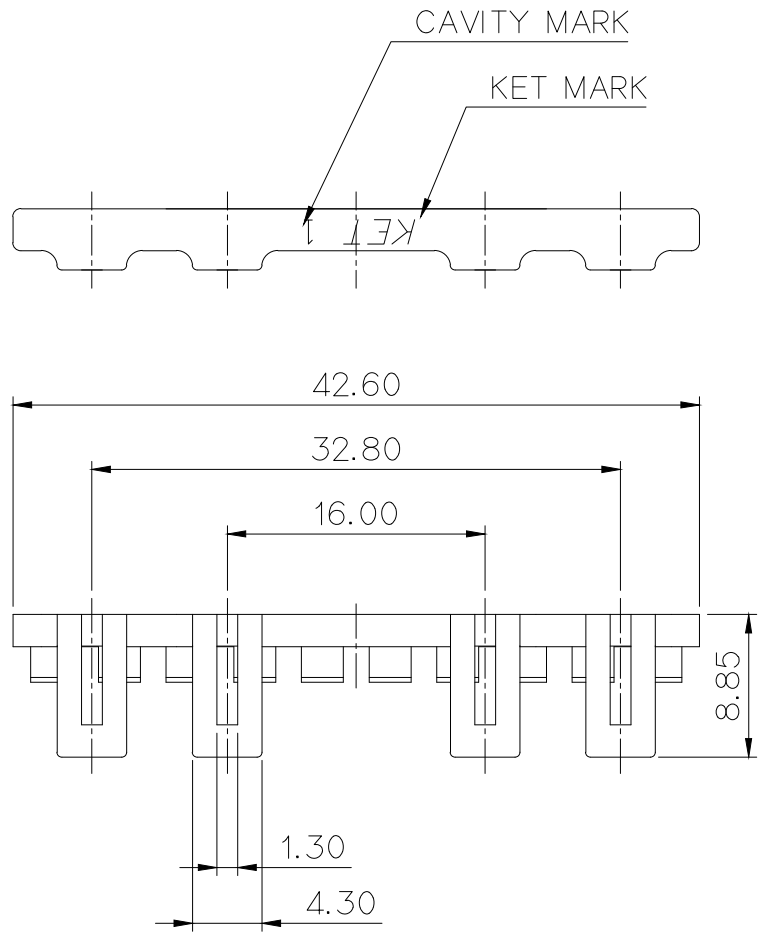


GENERAL TOLERANCE (HOUSING)							USED ON
10MAX	50MAX	100MAX	250MAX	250VR	ANGLE	ECCENT	
±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1	

주 기

- 1.기능상 유해한 BURR 및 WELDLINE등이 없을것.
- 2.적용 HOUSING : MG615562,625431,625432
- 3.제품내 함유된 6대 유해물질 (납,수은,카드뮴,6가크롬, PBBs,PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

NOTE

- 1. MUST BE FREE OF FLASH, SINK AND IMPERFECTION THAT AFFECT FUNCTION.
- 2. APPLICABLE HOUSING :MG615562,625431,625432
- 3. 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD,MERCURY, CADMIUM,HEXAVALENT CHROMIUM,PBBs,PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

NO.	COLOR
0	NATURAL
1	RED
2	BLUE
3	YELLOW
4	GRAY
5	BLACK

*

APPROVED

2016-03-07

KOREA ELECTRIC
TERMINAL CO., LTD.
Electronic Product Development Team

ISSUE MARK

					MATERIAL PBT(V0)		 KOREA ELECTRIC TERMINAL CO., LTD.		
					FINISH SEE TABLE				
					WIRE RANGE		CLASS 050		
					INSULATION		TYPE		
2	ECO-1311-117근거 도면 재작성	SMG KSH 	'13.11.20	LTR	REVISION RECORD	DR. CHK. APP. DATE	TOLERANCE EXCEPT AS NOTED SEE TABLE	SCALE 2/1	PART NO. MG635620
1	ECO-1307-017근거 도면 재작성	SMG KSH 	'13.07.04						
DR. PSH. 12.10.15		CHK. KSH. 12.10.16		PART NAME					
CHK.		APP. BUC. 12.10.16		NEW 050 10P R/H					