

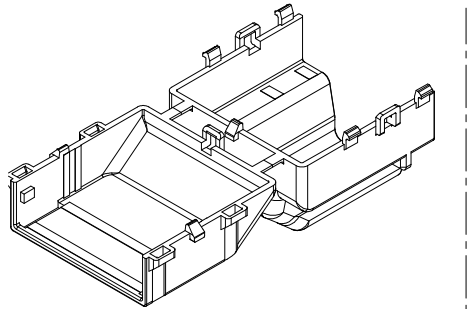
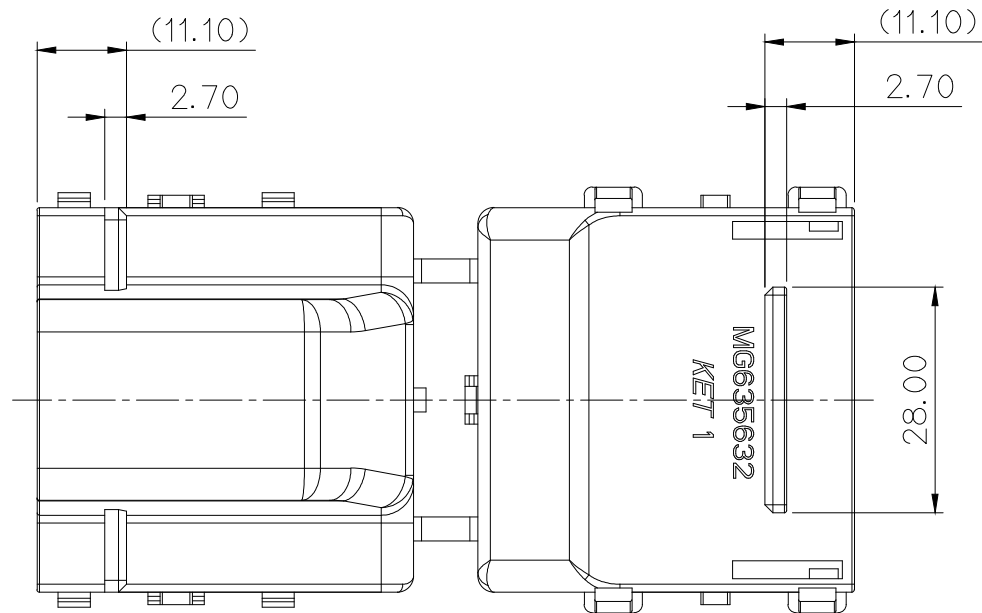
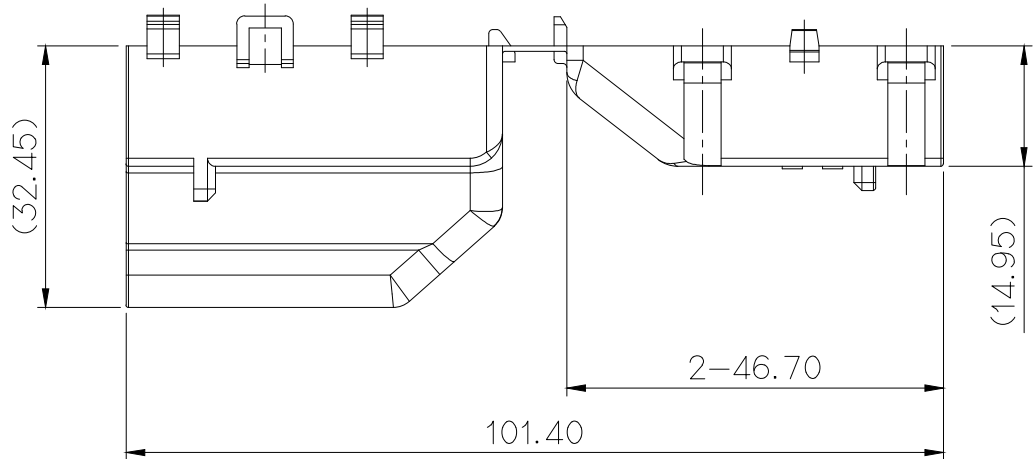


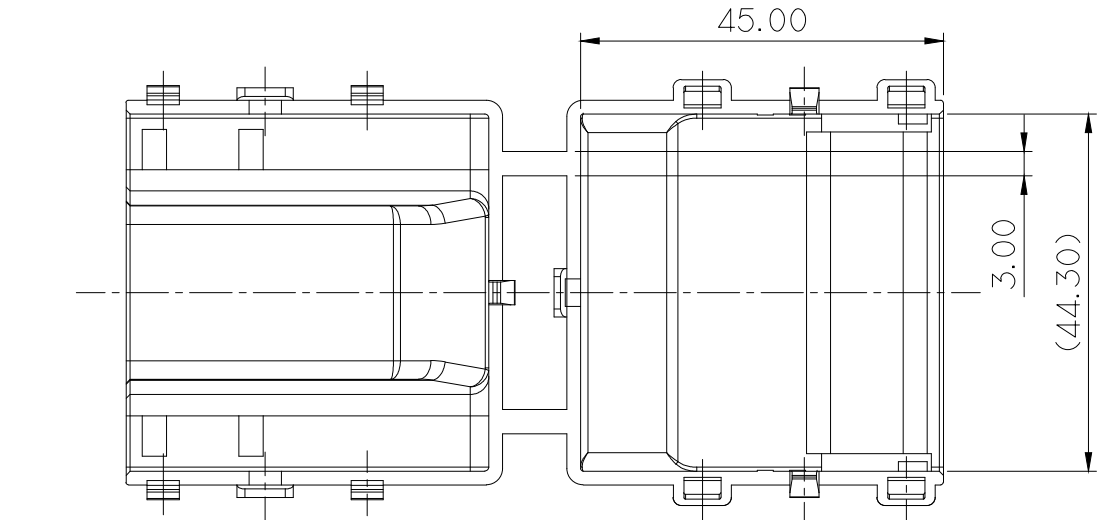


ISO VIEW

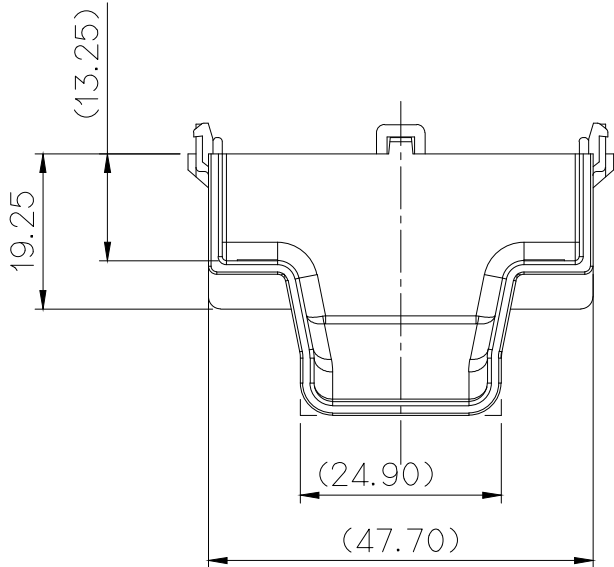

GENERAL TOLERANCE (HOUSING)										USED ON
10MAX	30MAX	50MAX	70MAX	100MAX	120MAX	250MAX	250VR	ANGLE	ECCENT	
±0.15	±0.2	±0.3	±0.4	±0.5	±0.75	±0.9	±1.4	±30'	0.1	

NOTE

1. MUST BE FREE OF FLASH, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
2. APPLICABLE CONNECTOR : MG645751
3. 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD,MERCURY, CADMIUM,HEXAVALENT CHROMIUM,PBBs,PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

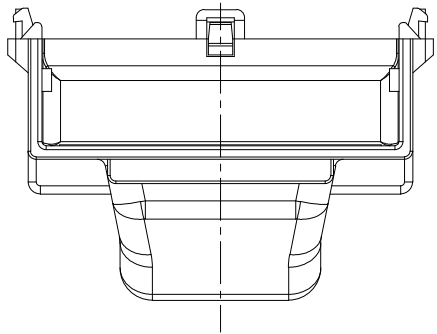

NO.	MATERIAL	COLOR
0	P.P : HP900	NATURAL
1		RED
2		BLUE
20		JADE
3		YELLOW
* 4		GRAY
40		DARK GRAY
41		LIGHT GRAY
* 5		BLACK
6		DARK GREEN
7		BROWN
8		LIGHT GREEN
9		MAGENTA
11		ORANGE

주 기

1. 기능상 유해한 BURR 및 WELDLINE 등이 없을 것.
2. 적용 CONNECTOR : MG645751
- 3.제품내 함유된 6대 유해물질 (납,수은,카드뮴,6가크롬, PBBs,PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

					MATERIAL SEE TABLE		 KOREA ELECTRIC TERMINAL CO., LTD.	
					FINISH SEE TABLE			
					WIRE RANGE		CLASS	HYBRID
					INSULATION		TYPE	025/060/110/250
LTR	REVISION RECORD		CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED SEE TABLE	SCALE 1/1	PART NO. MG635632
DR.	RJH	2014.08.13	CHK.		PART NAME			
CHK.			APP.		025060110250 47M WIRE COVER			

APPROVED

2018-12-10

KOREA ELECTRIC
TERMINAL CO., LTD.
Connector Develop
ment Team 1

ISSUE MARK