

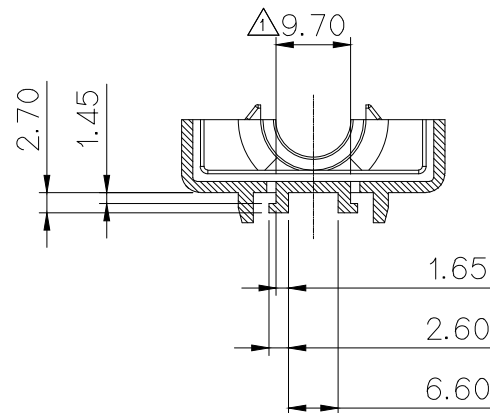
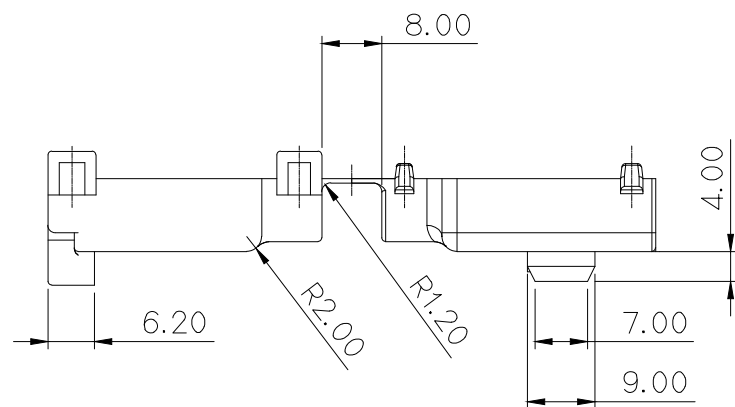
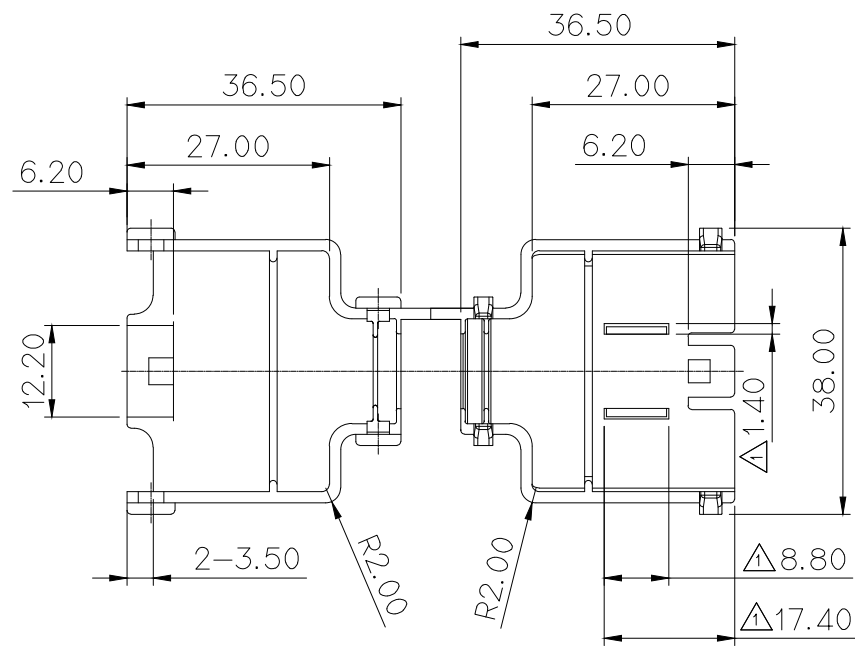


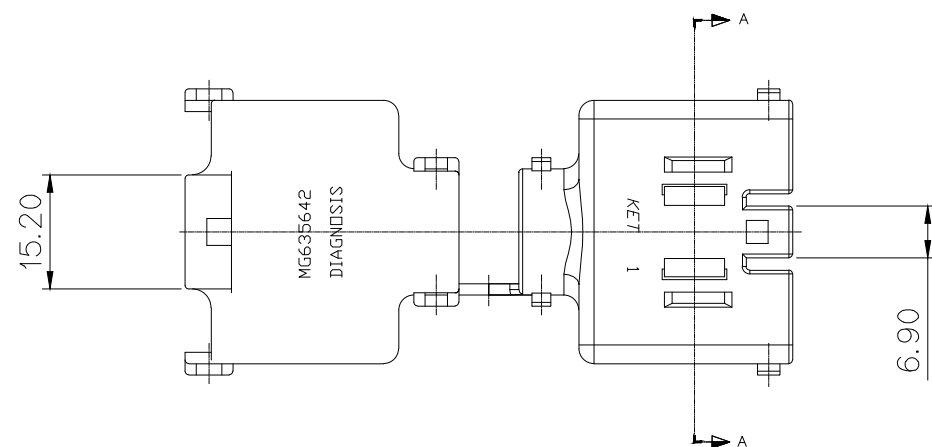

SECTION B-B



△ GENERAL TOLERANCE (HOUSING)

10MAX	30MAX	50MAX	70MAX	100MAX	120MAX	250MAX	250VR	ANGLE	USED ON
±0.15	±0.20	±0.30	±0.40	±0.50	±0.75	±0.90	±1.40	±30'	

주 기

- 기능상 유해한 BURR 및 WELDLINE 등이 없을 것.
- 적용 HOUSING : MG652863, MG652864
MG653650, MG653849, MG653651
- 적용 CORRUGATED TUBE : $\phi 9.0$
- 제품내 함유된 6대 유해물질 (납, 수은, 카드뮴, 6가크롬, PBBs, PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안 된다.

NOTE

- MUST BE FREE OF BURR, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
- APPLICABLE HOUSING : MG652863, MG652864
MG653650, MG653849, MG653651
- APPLICABLE CORRUGATED TUBE : $\phi 9.0$
- 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD, CADMIUM, HEXAVALENT CHROMIUM, PBBs, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

APPROVED

2016-03-09

KOREA ELECTRIC
TERMINAL CO., LTD.
Product Development Team 1

ISSUE MARK

						MATERIAL		NYLON66		 KOREA ELECTRIC TERMINAL CO., LTD.	
						FINISH		BLACK			
	ECO-1312-146 근거		SYC	CSH	CWK	2013.12.13		WIRE RANGE		CLASS	
	ECO-1310-111 근거 도면 재 작성		YM.K	CSH	CWK	'13.08.20		INSULATION		TYPE	
LTR	REVISION RECORD		DR.	CHK.	APP.	DATE		TOLERANCE EXCEPT AS NOTED	SEE TABLE	SCALE 1/1	PART NO. MG635642
DR.		YM.K	'13.01.11		CHK.		1/11		PART NAME		
				APP.		1/11		DIAGNOSIS 20P REAR COVER			