




APPROVED

2019-11-06

**KOREA ELECTRIC
TERMINAL CO., LTD.
Korea Electric Te
rminal Co., LTD.**

CUSTOMER DRAWING

GENERAL TOLERANCE (HOUSSING)										USED ON
10 MAX	30 MAX	50 MAX	70 MAX	100 MAX	120 MAX	250 MAX	250 VR	ANGLE	ECCENT	
±0.15	±0.20	±0.30	±0.40	±0.50	±0.75	±0.90	±1.4	±30°	0.1	

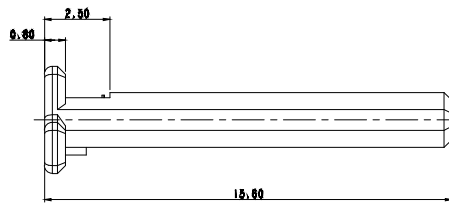

NO.	MATERIAL	COLOR
0	PBT-GF10	NATURAL
1		RED
2		BLUE
20		JADE
* 3		YELLOW
4		GRAY
40		DARK GRAY
41		LIGHT GRAY
5		BLACK
6		DARK GREEN
7		BROWN
8		LIGHT GREEN
9	MAGENTA	
11	ORANGE	

부기
1. 가습식 유압식 JARR 및 WELDLINE 등에 해당
2. 제품 HCU51MG, MG555723
3. 제품내 함유된 6차 유해물질 (납, 수은, 카드뮴, 6가크롬, PBBs, PBDEs)은 EU ELV 지령 및 RoHS 적용에서
지정된 최대 허용 농도를 초과하지는 않으나,

NOTE

1. MUST BE FREE OF FLASH, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
2. APPLICABLE HOUSING: M0605723
3. 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD, MERCURY, CADMIUM, HEXAVALENT CHROMIUM, PBBs, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELY DIRECTIVE & RoHS REGULATION.

[illegible]