

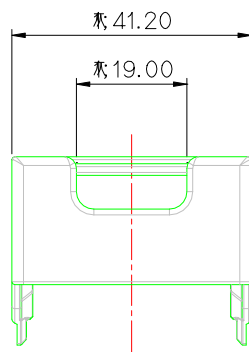


ISO VIEW






NO.	PART NO.	PART NAME	MATERIAL	FINISH
1	MG635651	025060110 68F LEVER	SEE TABLE	SEE TABLE
2	MG635736	025060110 68F LEVER(LF HEV)	SEE TABLE	SEE TABLE

△

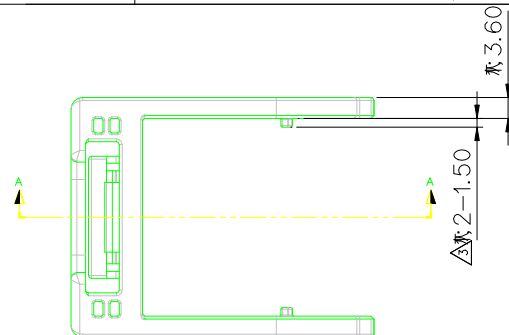

△ SECTION A-A

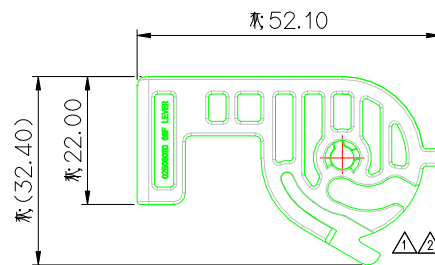

△ *

* △

NO.	MATERIAL	COLOR
0	PBT	NATURAL
1		RED
2		BLUE
20		JADE
3		YELLOW
4		GRAY
40		DARK GRAY
41		LIGHT GRAY
5		BLACK
6		DARK GREEN
7		BROWN
8		LIGHT GREEN
9		MAGENTA
11		ORANGE

주 기

- 기능상 유해한 BURR 및 WELDLINE 등이 없을 것.
- 적용 CONNECTOR : MG655730
- 제품내 함유된 6대 유해물질 (납,수은,카드뮴,6가크롬, PBBs,PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

NOTE

- MUST BE FREE OF FLASH, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
- APPLICABLE CONNECTOR : MG655730
- 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD,MERCURY, CADMIUM,HEXAVALENT CHROMIUM,PBBs,PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

025060110 68F LEVER		025060110 68F LEVER(LF HEV)	
PART NO.	MG635651	PART NO.	MG635736

APPROVED

2015-06-25

KOREA ELECTRIC
TERMINAL CO., LTD.
Connector Development Team 1

ISSUE MARK

△	ECO-1504-144 근거 도면 제작성	WDH	KMH	LSY	15.04.09	MATERIAL	SEE TABLE	KIET KOREA ELECTRIC ENGINEERED TERMINAL CO., LTD.	
△	ECO-1412-238 근거 도면 제작성	LJW	WDH	LSY	14.12.18	FINISH	SEE TABLE		
△	ECO-1412-213 근거 도면 제작성	LJW	WDH	LSY	14.12.17	WIRE RANGE		CLASS	HYBRID
△	ECO-1406-155 근거 도면 제작성	LJW	WDH	KMH	LSY	14.06.23	INSULATION	TYPE	025/060/110
△	검사 성적서 합격에 따른 도면 제작성	LJW	WDH	KMH	HJB	14.05.30			
LTR	REVISION RECORD	DR.	CHK.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED	SCALE	PART NO.
DR.	KMH	2013.05.28	CHK.				SEE TABLE	1/1	MG635651
CHK.	CWK	2013.05.28	APP.	HSH	2013.05.28		PART NAME	025060110 68F LEVER	