


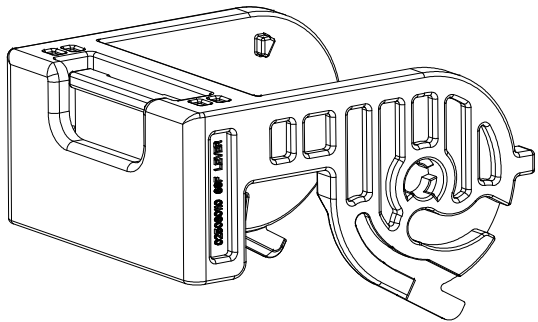
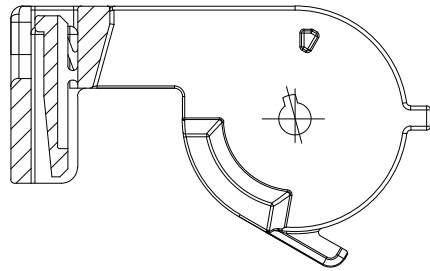
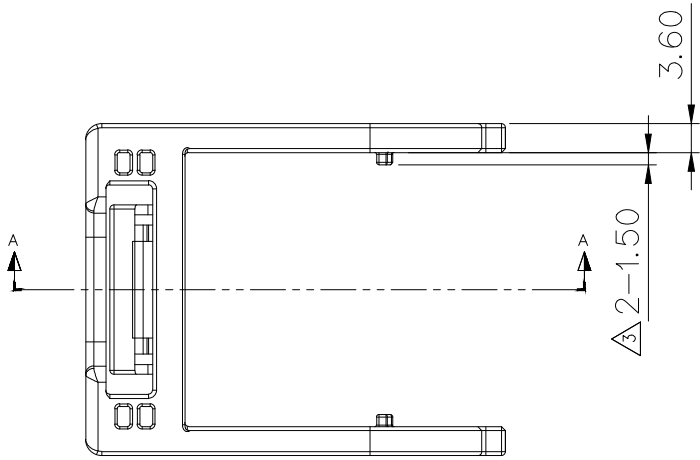
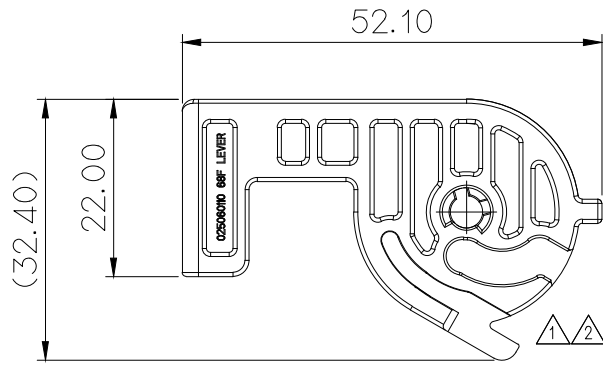


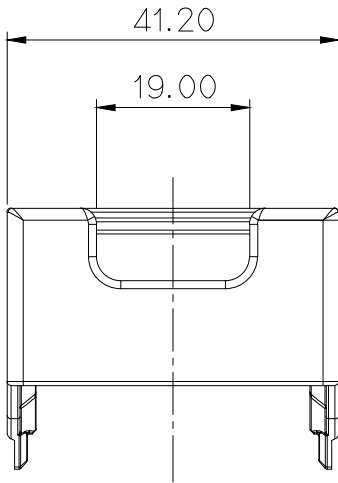

ISO VIEW

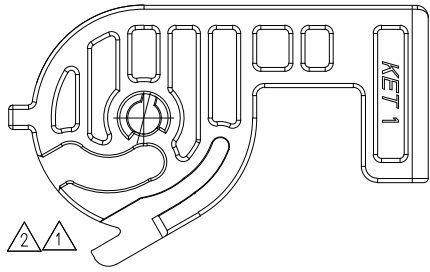

SECTION A-A

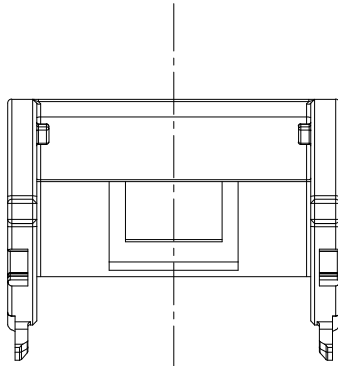

GENERAL TOLERANCE (HOUSING)										USED ON
10MAX	30MAX	50MAX	70MAX	100MAX	120MAX	250MAX	250VR	ANGLE	ECCENT	
±0.15	±0.2	±0.3	±0.4	±0.5	±0.75	±0.9	±1.4	±30'	0.1	

NO.	PART NO.	PART NAME	MATERIAL	FINISH
1	MG635651	025060110 68F LEVER	SEE TABLE	SEE TABLE
2	MG635736	025060110 68F LEVER(LF HEV)	SEE TABLE	SEE TABLE

NO.	MATERIAL	COLOR
0	PBT	NATURAL
1		RED
2		BLUE
20		JADE
3		YELLOW
4		GRAY
40		DARK GRAY
41		LIGHT GRAY
5		BLACK
6		DARK GREEN
7		BROWN
8		LIGHT GREEN
9		MAGENTA
11		ORANGE

주 기

- 기능상 유해한 BURR 및 WELDLINE 등이 없을 것.
- 적용 CONNECTOR : MG655730
- 제품내 함유된 6대 유해물질 (납,수은,카드뮴,6가크롬, PBBs,PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

NOTE

- MUST BE FREE OF FLASH, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
- APPLICABLE CONNECTOR : MG655730
- 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD,MERCURY, CADMIUM,HEXAVALENT CHROMIUM,PBBs,PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

025060110 68F LEVER		025060110 68F LEVER(LF HEV)	
PART NO.	MG635651	PART NO.	MG635736

4	ECO-1504-144 근거 도면 재작성	WDH	KMH	LSY	15.04.09	MATERIAL	SEE TABLE	 KOREA ELECTRIC TERMINAL CO., LTD.			
3	ECO-1412-238 근거 도면 재작성	LJW	-	WDH	LSY	14.12.18	FINISH		SEE TABLE		
2	ECO-1412-213 근거 도면 재작성	LJW	-	WDH	LSY	14.12.17	WIRE RANGE		CLASS	HYBRID	
1	ECO-1406-155 근거 도면 재작성	LJW	WDH	KMH	LSY	14.06.23	INSULATION		TYPE	025/060/110	
0	검사 성적서 합격에 따른 도면 재작성	LJW	WDH	KMH	HJB	14.05.30	TOLERANCE EXCEPT AS NOTED		SCALE	PART NO.	
LTR	REVISION RECORD	DR.	CHK.	CHK.	APP.	DATE	SEE TABLE	1/1	MG635651		
DR.	KMH 2013.05.28	CHK.				PART NAME					
CHK.	CWK 2013.05.28	APP. HSH 2013.05.28				025060110 68F LEVER					



ISSUE MARK