
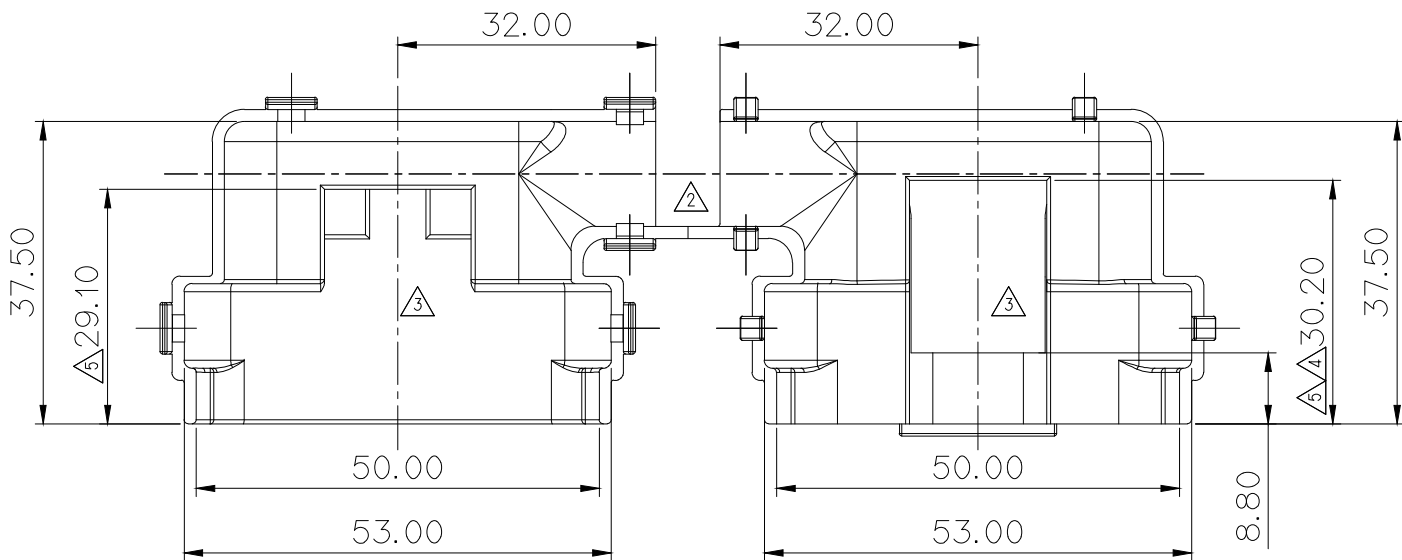
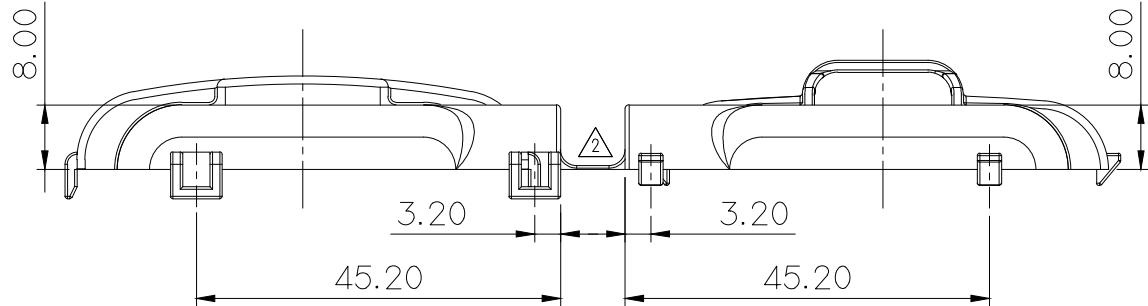
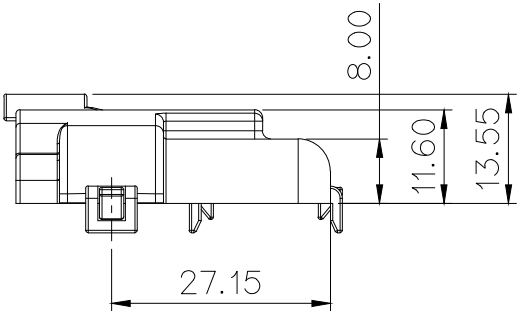
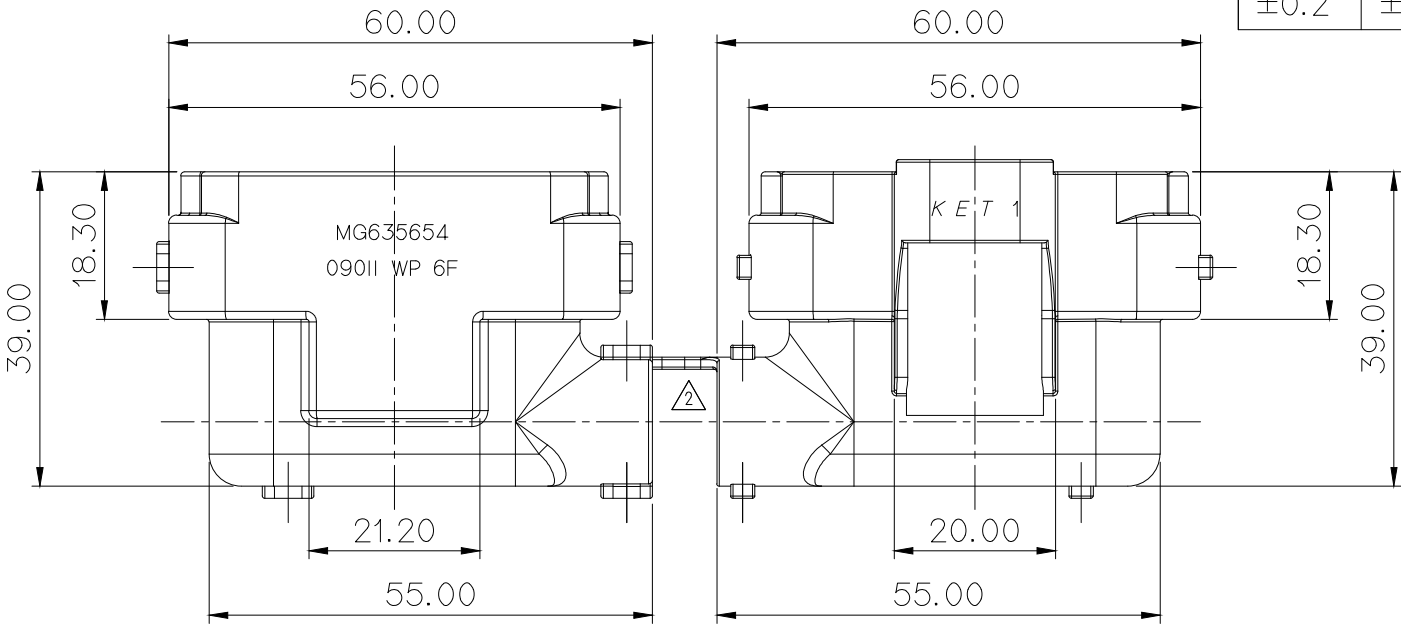


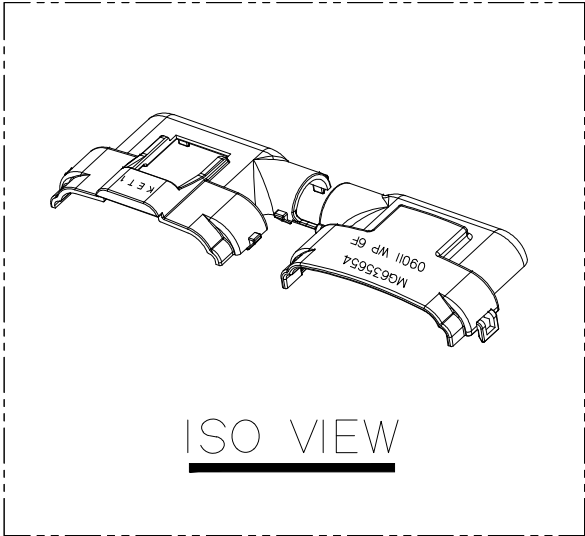

GENERAL TOLERANCE (HOUSING)							USED ON
10MAX	50MAX	100MAX	250MAX	250VR	ANGLE	ECCENT	
±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1	

NOTE

- MUST BE FREE OF BURR, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
- APPLICABLE HOUSING : MG643796
- APPLICABLE CORRUGATED TUBE : $\phi 7.0$
- 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD, CADMIUM, HEXAVALENT CHROMIUM, PBBs, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

5. COVER SURFACE GRAIN STYLE : HT 86-100%

주 기

- 기능상 유해한 BURR 및 WELDLINE등이 없을것.
- 적용 HOUSING : MG643796
- 적용 CORRUGATED TUBE : $\phi 7.0$
- 제품내 함유된 6대 유해물질 (납, 수은, 카드뮴, 6가크롬, PBBs, PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.


5. COVER 표면 부식 사양 : HT 86 - 100%

APPROVED

2018-12-10

KOREA ELECTRIC
TERMINAL CO., LTD.
Korea Electric Te
rminal Co., LTD.

ISSUE MARK

5	ECO-1702-389 근거 도면 재 작성 (커버 체결성 개선)	KSJ	CJH	LSY	17.02.24	MATERIAL	SEE TABLE	 KOREA ELECTRIC TERMINAL CO., LTD.	
4	ECO-1509-228 근거 도면 재 작성 (커버 매칭성 개선)	KCS	CKY	LSY	15.09.17	FINISH	SEE TABLE		
3	ECO-1506-243 근거 도면 재 작성 (재결성 개선)	KCS	CKY	LSY	15.06.12	WIRE RANGE	CLASS		
2	ECO-1305-157 근거 도면 재 작성	YM.K	CSH	HSH	13.05.28	INSULATION	TYPE		
1	ECO-1209-130 근거 도면 재 작성	YM.K	CSH	HSH	12.09.24	TOLERANCE EXCEPT AS NOTED	SEE TABLE	SCALE 1/1	PART NO. MG635654
LTR	REVISION RECORD	DR.	CHK.	APP.	DATE	PART NAME			
DR. YM.K. 12.09.17		CHK.	CSH	9/19		090II WP 6F COVER			
CHK.		APP.	HSH	9/19					