
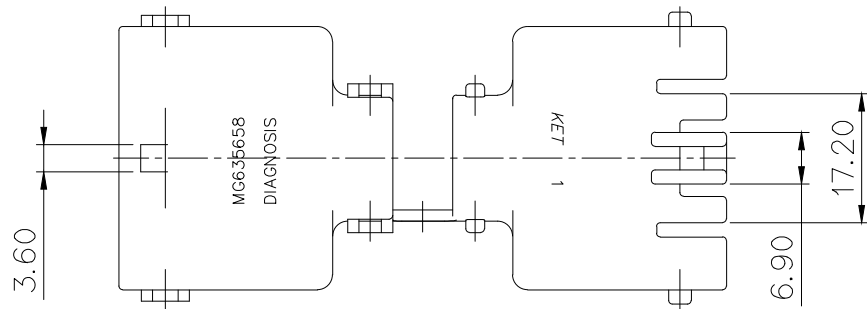
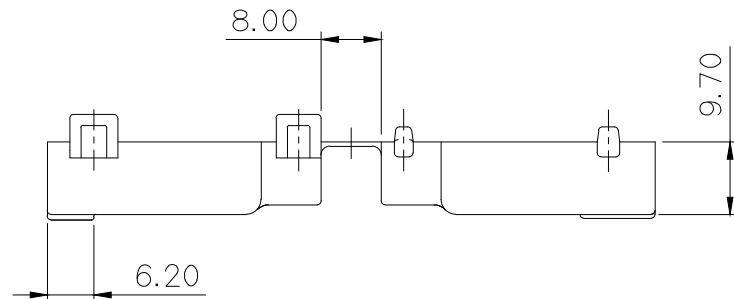
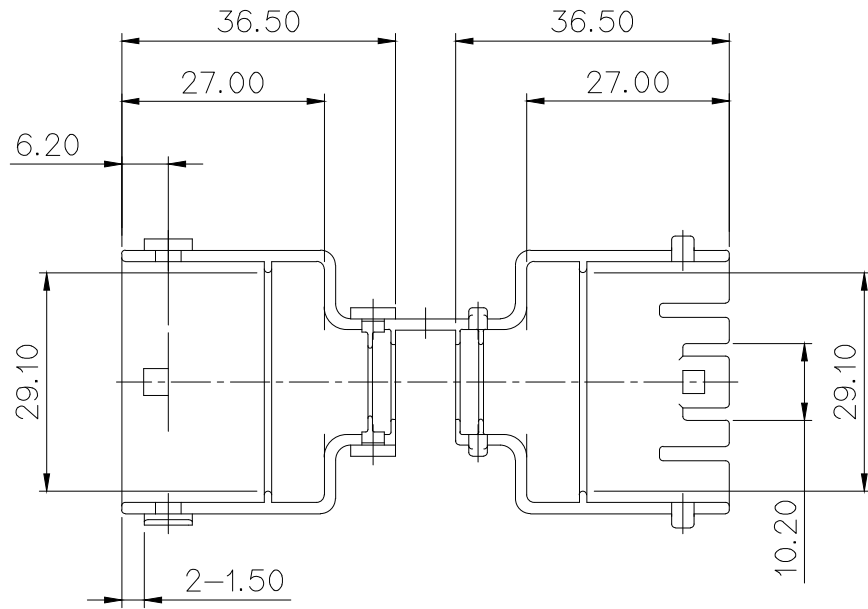


NO.	MATERIAL	COLOR
0	NYLON66	NATURAL
1		RED
2		BLUE
20		JADE
3		YELLOW
4		GRAY
40		DARK GRAY
41		LIGHT GRAY
* 5		BLACK
6		DARK GREEN
7		BROWN
8		LIGHT GREEN
9		MAGENTA
11		ORANGE



GENERAL TOLERANCE (HOUSING)							USED ON
10MAX	50MAX	100MAX	250MAX	250VR	ANGLE	ECCENT	
±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1	

주 기

- 기능상 유해한 BURR 및 WELDLINE등이 없을것.
- 적용 HOUSING : MG655737-5
MG655749-5
- 적용 CORRUGATED TUBE : $\phi 9.0$
- 제품내 함유된 6대 유해물질 (납, 수은, 카드뮴, 6가크롬, PBBs, PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

NOTE

- MUST BE FREE OF BURR, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
- APPLICABLE HOUSING : MG655737-5
MG655749-5
- APPLICABLE CORRUGATED TUBE : $\phi 9.0$
- 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD, CADMIUM, HEXAVALENT CHROMIUM, PBBs, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

					MATERIAL	NYLON66	 KOREA ELECTRIC TERMINAL CO., LTD.	
					FINISH	BLACK		
					WIRE RANGE			CLASS
					INSULATION			TYPE
	ECO-1407-080 근거 도면 재작성	CKY		'14.07.09	TOLERANCE EXCEPT AS NOTED	SEE TABLE	SCALE 1/1	PART NO. MG635658-5
LTR	REVISION RECORD	DR.	CHK.	APP.	DATE	PART NAME		
DR. HSR '13.06.05		CHK. E.M.HWANG			DIAGNOSIS 20F WIRE COVER			
		APP. W.K.CHOI						

APPROVED

2016-02-16

KOREA ELECTRIC
TERMINAL CO., LTD.
Connector Development Team 2

ISSUE MARK