



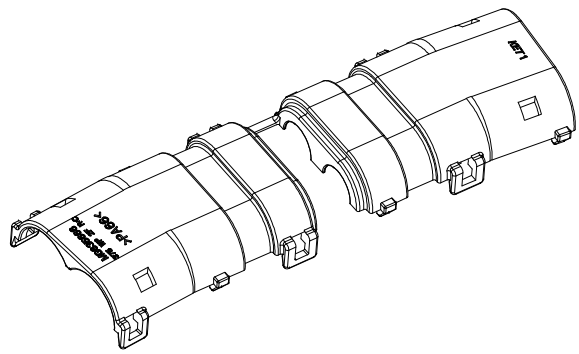


ISO VIEW

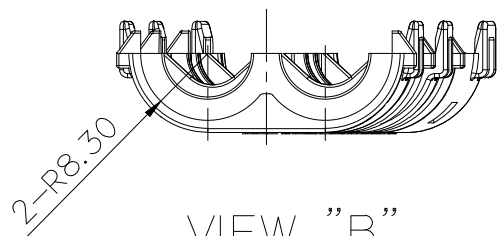

VIEW "B"

NOTE

1. UNLESS OTHERWISE SPECIFIED ALL RADIUS
TO BE 0.3 RADIUS.
2. UNLESS OTHERWISE SPECIFIED ALL CHAMFERS
TO BE 0.3 CHAMFER.
3. MUST BE FREE OF BURR, WELDLINE
AND IMPERFECTION THAT AFFECT FUNCTION.
4. APPLICABLE HOUSING : MG645784
7287-1990-30 (YAZAKI)
5. 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD
MERCURY,CADMIUM,HEXAVALENT CHROMIUM,
PPBS,PPDES) SHALL NOT EXCEED THE MAXIMUM
PERMISSIBLE CONCENTRATION PRESCRIBED
UNDER EU ELV DIRECTIVE & RoHS REGULATION.
6. APPLICABLE CORRUGATED TUBE : $\varnothing 9.0$

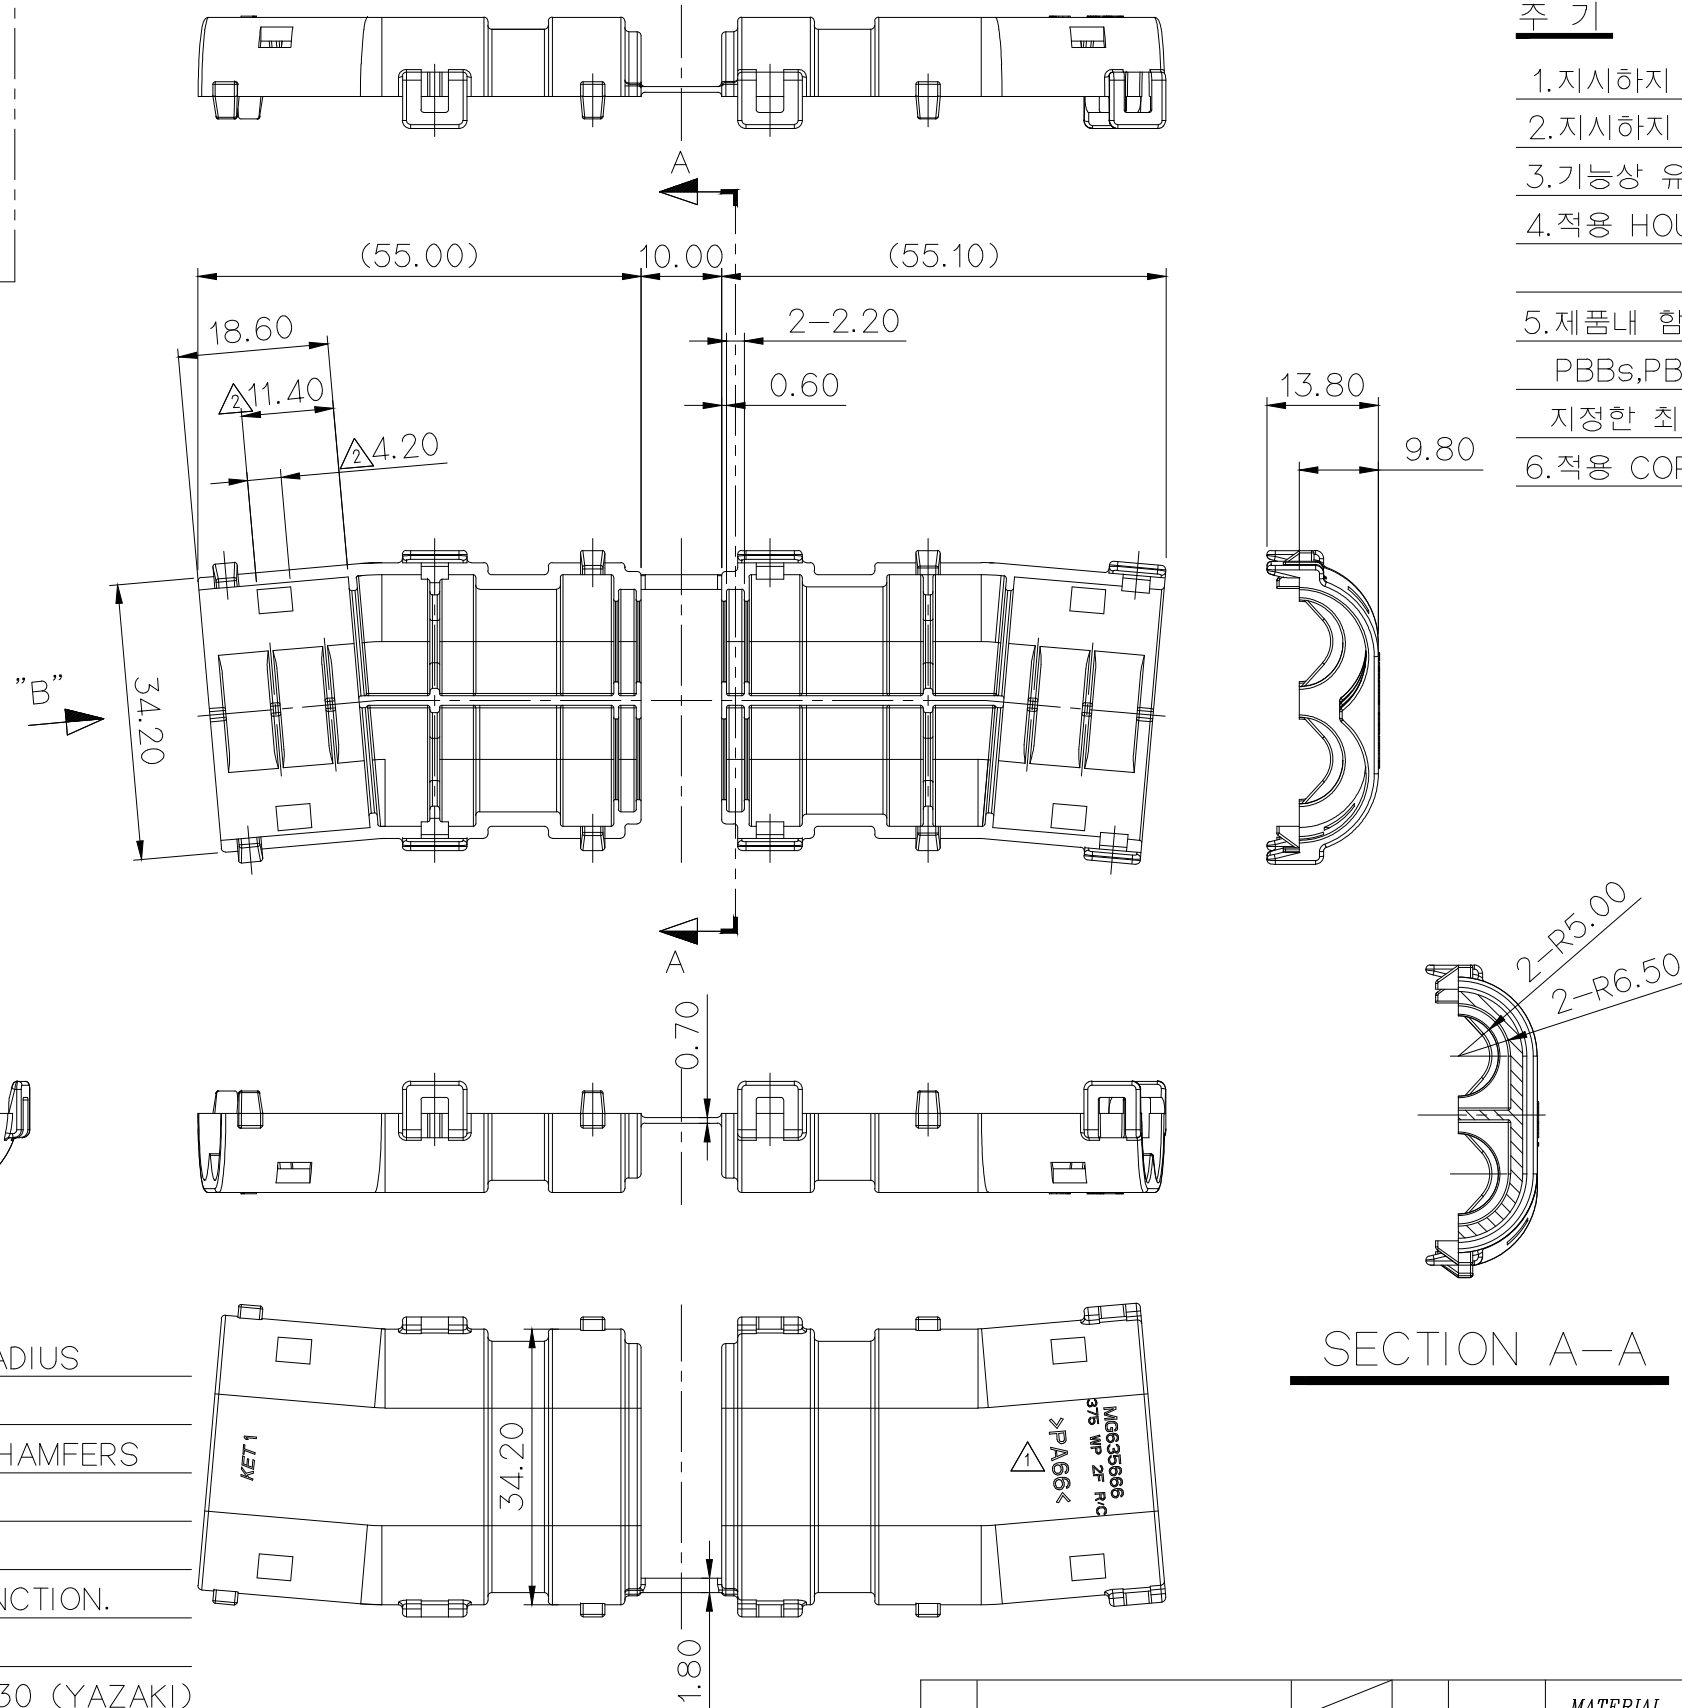

SECTION A-A

GENERAL TOLERANCE (HOUSING)										USED ON
10MAX	30MAX	50MAX	70MAX	100MAX	120MAX	250MAX	250VR	ANGLE	ECCENT	
±0.15	±0.20	±0.30	±0.40	±0.50	±0.75	±0.90	±1.4	±30'	0.1	

주 기 |

- 1.지시하지 않은 반경 R은 0.3으로 한다.
- 2.지시하지 않은 모따기 C는 0.3으로 한다.
- 3.기능상 유해한 BURR 및 WELDLINE등이 없을 것.
- 4.적용 HOUSING : MG645784
7287-1990-30 (YAZAKI)
- 5.제품내 함유된 6대 유해물질 (납,수은,카드뮴,6가크롬, PBBs,PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.
- 6.적용 CORRUGATED TUBE : $\phi 9.0$

NO.	MATERIAL	COLOR
0	PA66	NATURAL
1		RED
2		BLUE
20		JADE
3		YELLOW
4		GRAY
40		DARK GRAY
41		LIGHT GRAY
* 5		BLACK
6		DARK GREEN
7		BROWN
8		LIGHT GREEN
9	MAGENTA	
11	ORANGE	

*

APPROVED

2018-12-07

**KOREA ELECTRIC
TERMINAL CO., LTD.**
Korea Electric Te
rminal Co., LTD.

ISSUE MARK



TERMINAL CO., LTD.

CLASS 375

TYPE	WP
------	----

PART NO. MG635666

375 WP 2F REAR COVER

					MATERIAL		SEE TABLE		TERMINAL CO., LTD.
					FINISH		SEE TABLE		
					WIRE RANGE		CLASS		
②	ECO-1610-005 근거 도면 변경	KSC	CJH	LSY	16.10.05	INSULATION		TYPE	WP
①	재질명 표기(ECO-1406-157 근거)	HYJ		LSY	14.06.23	TOLERANCE EXCEPT AS NOTED		SCALE	PART NO.
LTR	REVISION RECORD	DR.	CHK.	APP.	DATE	SEE TABLE	1/1	MG635666	
DR.	HYJ 2013.09.27	CHK.				PART NAME			
CHK.	LSJ 2013.09.27	APP. CWK 2013.09.27				375 WP 2F REAR COVER			