


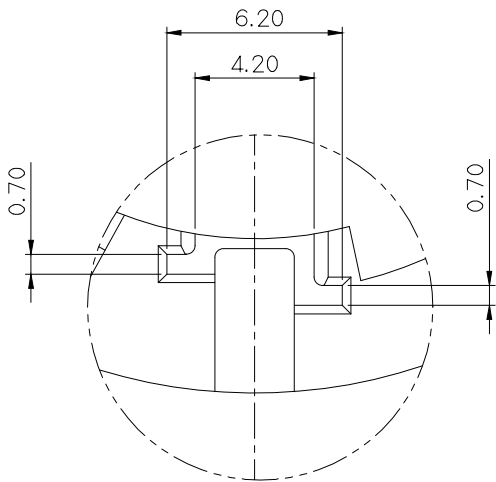
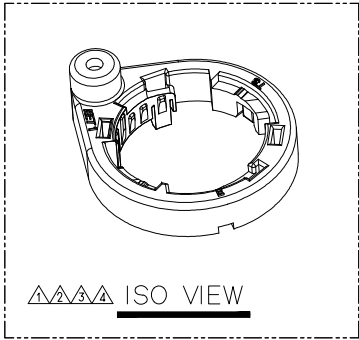
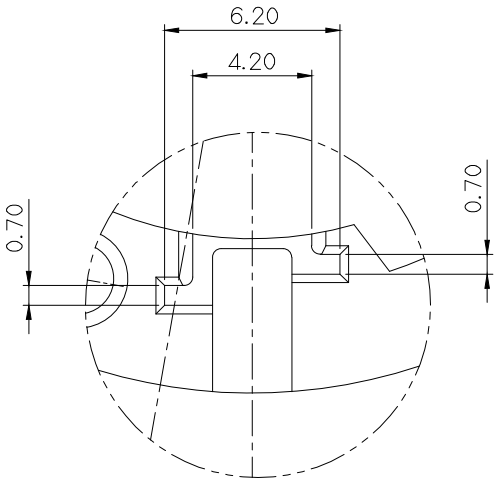
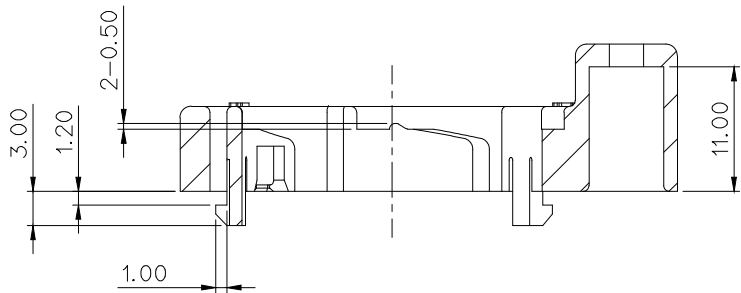


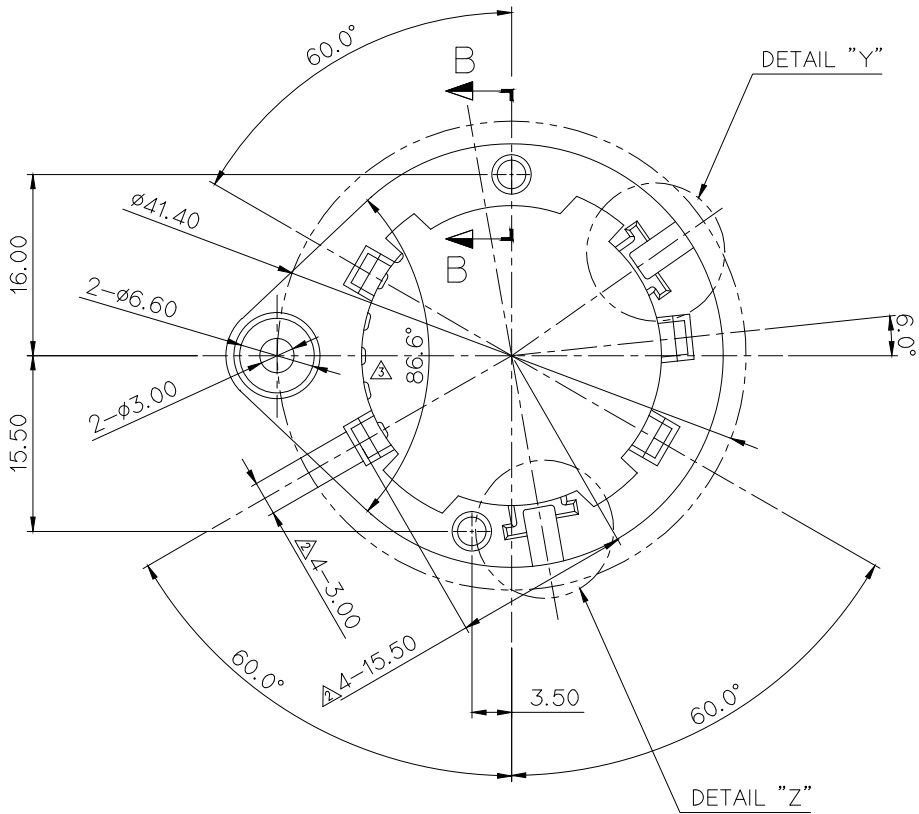


△ DETAIL Y (S=5/1)

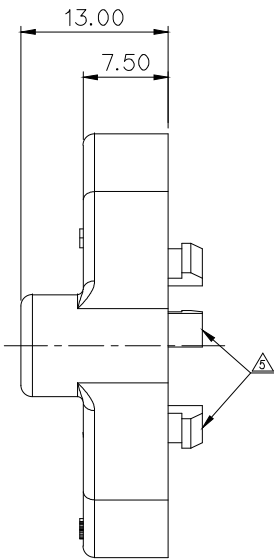

△ DETAIL Z (S=5/1)

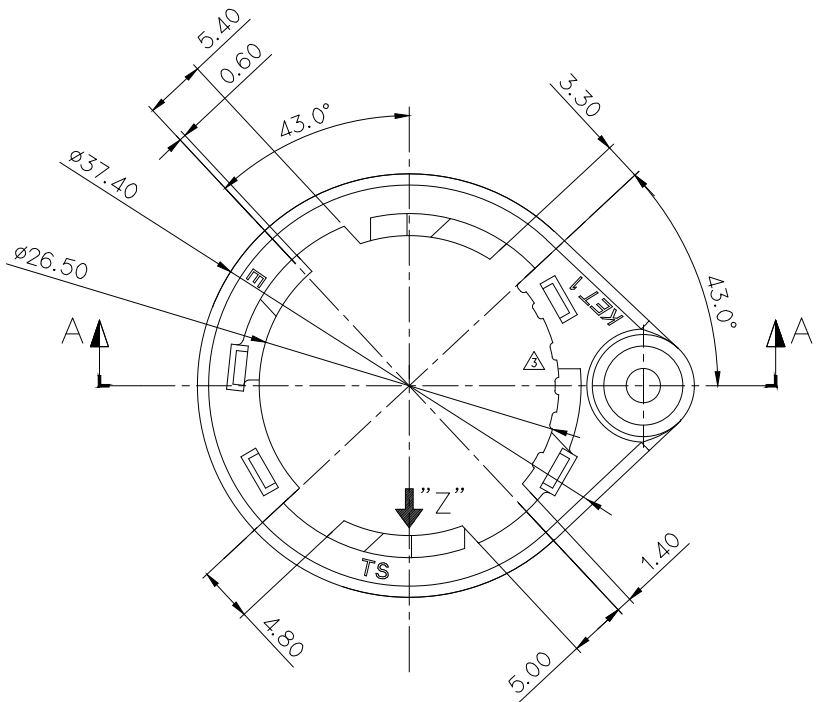

SECTION A-A

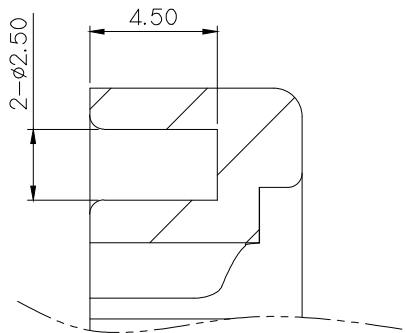

SECTION B-B(S=5/1)

GENERAL TOLERANCE (HOUSING)							USED ON
10MAX	50MAX	100MAX	250MAX	250VR	ANGLE	ECCENT	
±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1	

주 기

- 1.지시하지 않은 반경 R은 0.3으로 한다.
- 2.지시하지 않은 모따기 C는 0.3으로 한다.
- 3.기능상 유해한 BURR 및 WELDLINE등이 없을것.
- 4.적용 SOCKET : MG665658-41
- 5.적용 TERMINAL : ST761334-3, ST761335-3
- 6.제품내 함유된 6대 유해물질 (납,수은,카드뮴,6가크롬, PBBs,PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

NOTE

1. UNLESS OTHERWISE SPECIFIED ALL RADII TO BE 0.3 RADIUS.
2. UNLESS OTHERWISE SPECIFIED ALL CHAMFERS TO BE 0.3 CHAMFER.
3. MUST BE FREE OF FLASH, SINK AND IMPERFECTION THAT AFFECT FUNCTION.
4. APPLICABLE SOCKET : NG665658-41
5. APPLICABLE TERMINAL : ST761334-3, ST761335-3
6. 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD,MERCURY, CADMIUM,HEXAVALENT CHROMIUM,PBBs,PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

NO.	MATERIAL	COLOR
0	PA66+GF13%	NATURAL
1		RED
2		BLUE
20		JADE
3		YELLOW
4		GRAY
40		DARK GRAY
* 41		LIGHT GRAY
5		BLACK
6		DARK GREEN
7		BROWN
8		LIGHT GREEN
9		MAGENTA
11		ORANGE

APPROVED

2020-12-10

KOREA ELECTRIC
TERMINAL CO., LTD.
Korea Electric Te
rminal Co., LTD.

ISSUE MARK

△ ECO-1903-271 근거 도면 변경	KSC	-	CJH	'19.03.20	MATERIAL	PA66+GF13%	KIET KOREA ELECTRIC ENGINEERED TERMINAL CO., LTD.
△ ECO-1705-157 근거 도면 변경	LND	NKT	CJH	'17.05.12	FINISH	LIGHT GRAY	
△ ECO-1504-026 근거 도면 변경	CJH	SSH	BIN	'15.04.01	WIRE RANGE		CLASS
△ ECO-1407-316 근거 도면 변경	CJH	SSH	BIN	'14.07.28	INSULATION		TYPE
△ ECO-1405-026 근거 도면 재작성	CJH	SSH	BIN	'14.05.22	SEE TABLE	SCALE 2/1	PART NO. MG635677-41
LTR	REVISION RECORD		DR.	CHK.	APP.	DATE	PART NAME
DR.	KDR, '13.12.18		CHK.	JBS,	'13.12.19		TURN SIGNAL BRACKET HOUSING (SINGLE)
CHK.			APP.	CWK,	'13.12.19		