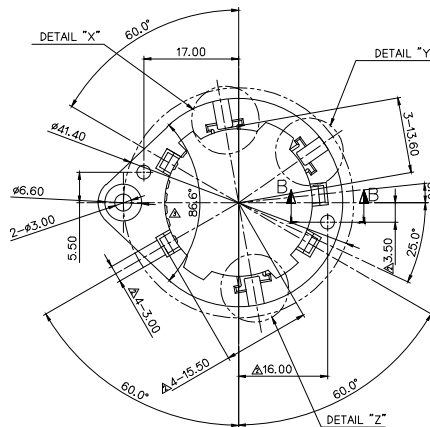

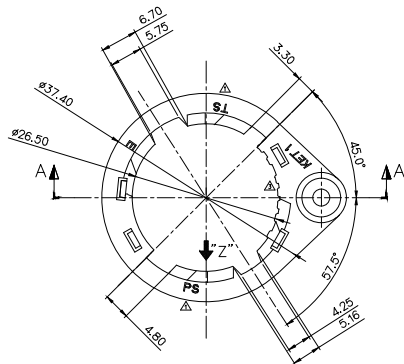






GENERAL SPECIFICATIONS (HOUSING)							USED ON
10MAX	50MAX	100MAX	250MAX	250V	ANGLE	ECCENT	
±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1	

주 기

1. 지시하지 않은 반경 R은 0.3으로 한다.
2. 지시하지 않은 모따기 C는 0.3으로 한다.
3. 기능상 유해한 BURR 및 WELDLINE 등이 없도록 한다.
4. 적용 SOCKET : MG665659-5
5. 적용 TERMINAL : ST761333-3, ST761334-3, ST761335-3
6. 제품내 함유된 6대 유해물질 (납, 수은, 카드뮴, 6가크롬, PBBs, PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안 된다.

NOTE

1. UNLESS OTHERWISE SPECIFIED ALL RADII TO BE 0.3 RADIUS.
2. UNLESS OTHERWISE SPECIFIED ALL CHAMFERS TO BE 0.3 CHAMFER.
3. MUST BE FREE OF FLASH, SINK AND IMPERFECTION THAT AFFECT FUNCTION.
4. APPLICABLE SOCKET : MG665659-5
5. APPLICABLE TERMINAL : ST761333-3, ST761334-3, ST761335-3
6. 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD, MERCURY, CADMIUM, HEXAVALENT CHROMIUM, PBBs, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

NO.	MATERIAL	COLOR
0	NATURAL	NATURAL
1	PA66+GF13%	RED
2		BLUE
20		JADE
3		YELLOW
4		GRAY
40		DARK GRAY
41		LIGHT GRAY
5		BLACK
6		DARK GREEN
7		BROWN
8		LIGHT GREEN
9		MAGENTA
11		ORANGE

APPROVED

2017-08-10

KOREA ELECTRIC
TERMINAL CO., LTD.
Korea Electric Terminal Co., Ltd.

ISSUE MARK

ECO-1705-157 2017.08.10		USE	REV	DATE	MATERIAL PA66+GF13%		KOREA ELECTRIC	
ECO-1804-026 2017.04.01		USE	REV	DATE	FINISH BLACK		TERMINAL CO., LTD.	
ECO-1407-316 2017.07.26		USE	REV	DATE	WIRE RANGE		CLASS	
ECO-1405-026 2017.04.01		USE	REV	DATE	INSULATION		TYPE	
ECO-1405-026 2017.04.01		USE	REV	DATE	SEE TABLE		PART NO.	
ECO-1405-026 2017.04.01		USE	REV	DATE	TURN SIGNAL BRACKET HOUSING (DOUBLE)		MG63567B-S	
ECO-1405-026 2017.04.01		USE	REV	DATE	TURN SIGNAL BRACKET HOUSING (DOUBLE)		MG63567B-S	