




ISO VIEW

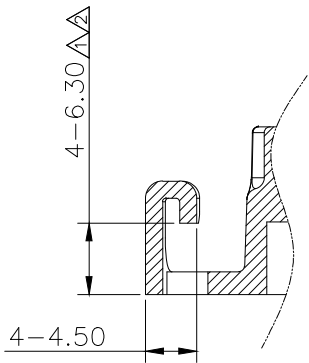



SECTION A-A'

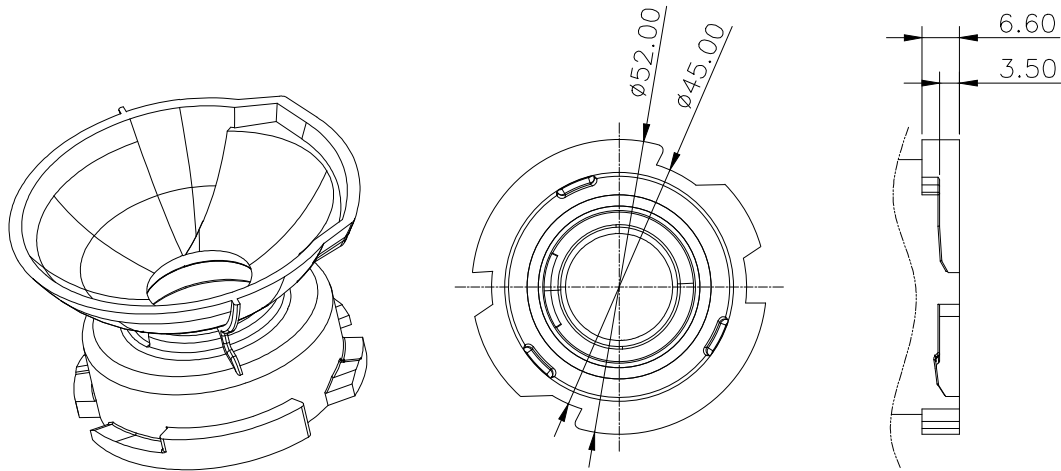


REFLECTOR PLUG HOLE (S:1/1)

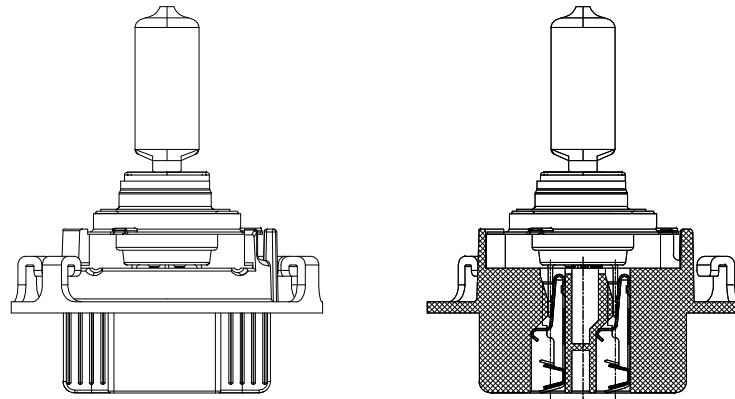

BULB ASSEMBLY

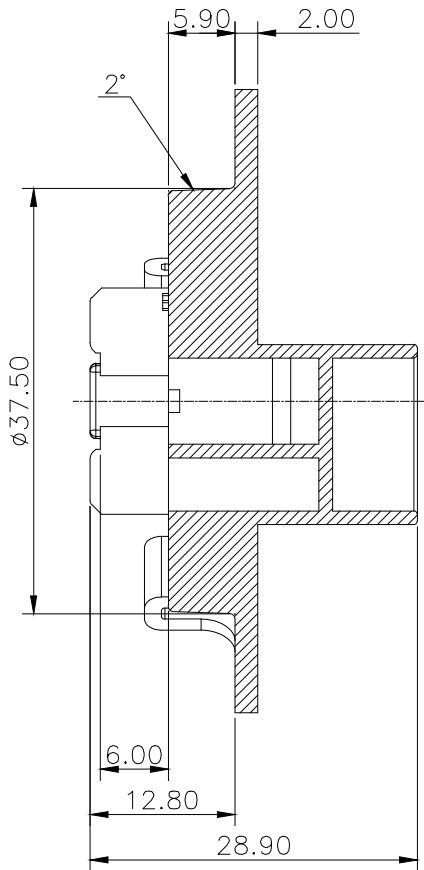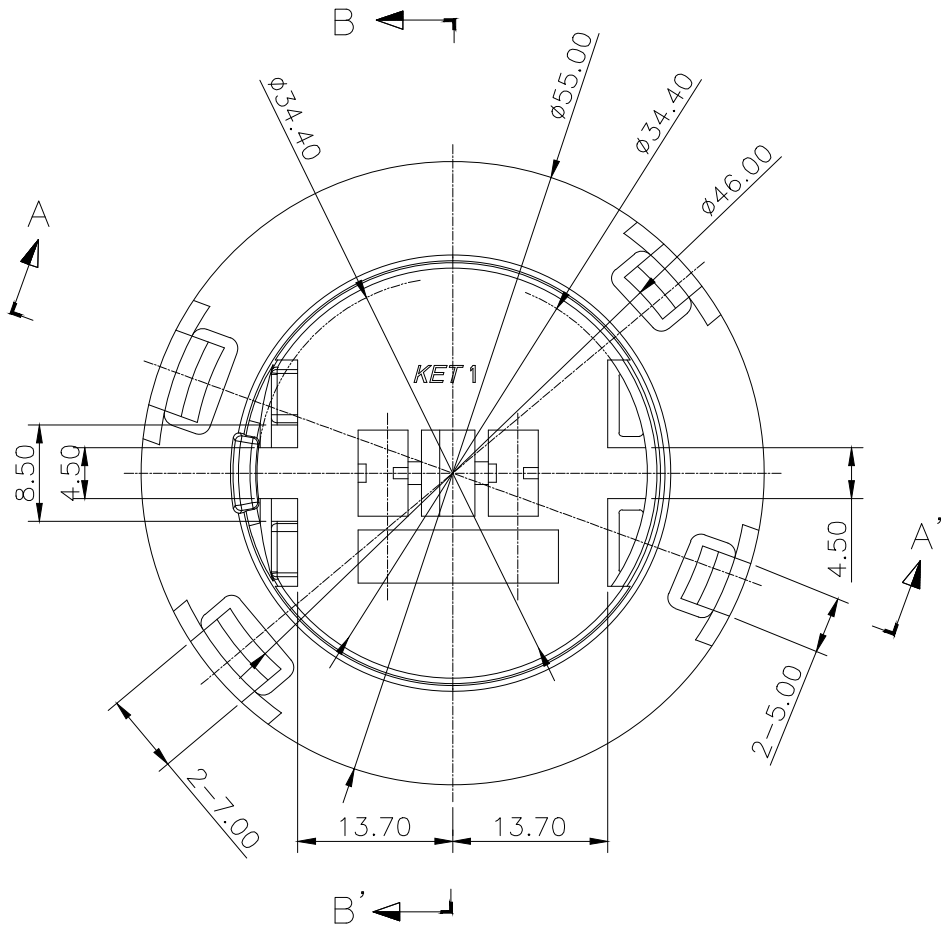

SECTION B-B'

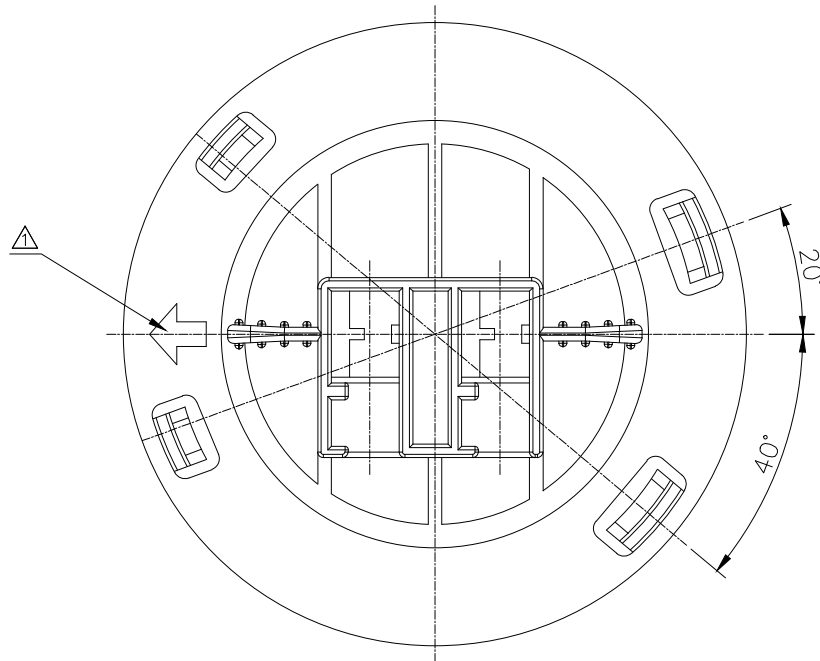

주 기

- 기능상 유해한 BURR 및 WELDLINE등이 없을 것.
- 적용 TERMINAL: ST730932
- 제품내 함유된 6대 유해물질 (납, 수은, 카드뮴, 6가크롬, PBBs, PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

NOTE

- MUST BE FREE OF FLASH, SINK AND IMPERFECTION THAT AFFECT FUNCTION.
- APPLICABLE OF TERMINAL: ST730932
- 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD, MERCURY, CADMIUM, HEXAVALENT CHROMIUM, PBBs, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

GENERAL TOLERANCE (HOUSING)										USED ON
10MAX	30MAX	50MAX	70MAX	100MAX	120MAX	250MAX	250VR	ANGLE	ECCENT	
±0.15	±0.20	±0.30	±0.40	±0.50	±0.75	±0.90	±1.4	±30'	0.1	

APPROVED
2018-12-10
KOREA ELECTRIC
TERMINAL CO., LTD.
Product Development Team 1

ISSUE MARK

						MATERIAL PA66+GF30%		KIET KOREA ELECTRIC	
						FINISH BLACK		ENGINEERED TERMINAL CO., LTD.	
△	ECO-1404-161에 근거	NKT	SSH	HJB	14.04.21	WIRE RANGE		CLASS	
△	ECO-1403-198에 근거	NKT	SSH	HJB	14.03.27	INSULATION		TYPE	
LTR	REVISION RECORD		DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED SEE TABLE	SCALE 2/1	PART NO. MG635680-5
DR.	NKT. 2013.12.13		CHK. JBS. 2013.12.13			PART NAME H7 HEAD LAMP SOCKET			
CHK.			APP. CWK. 2013.12.13						