
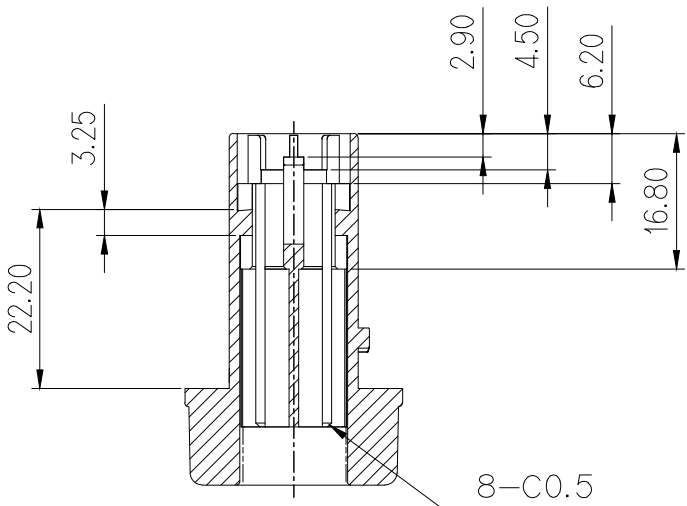
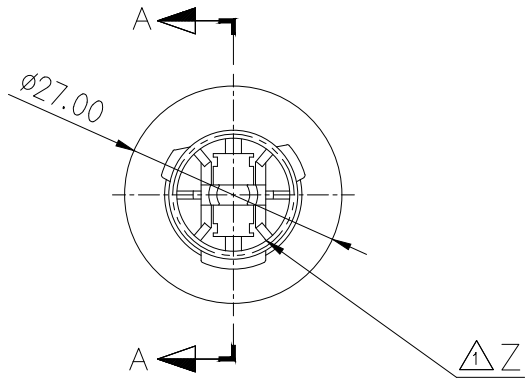
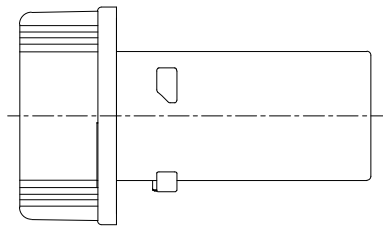
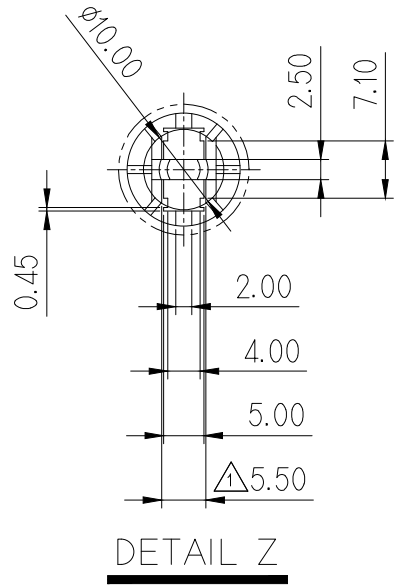
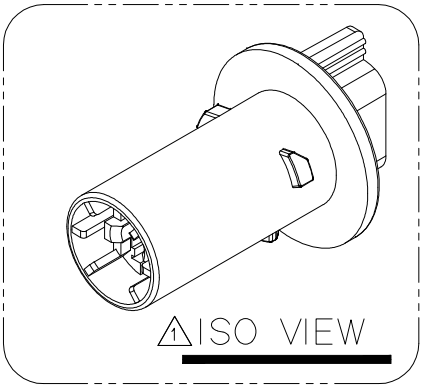
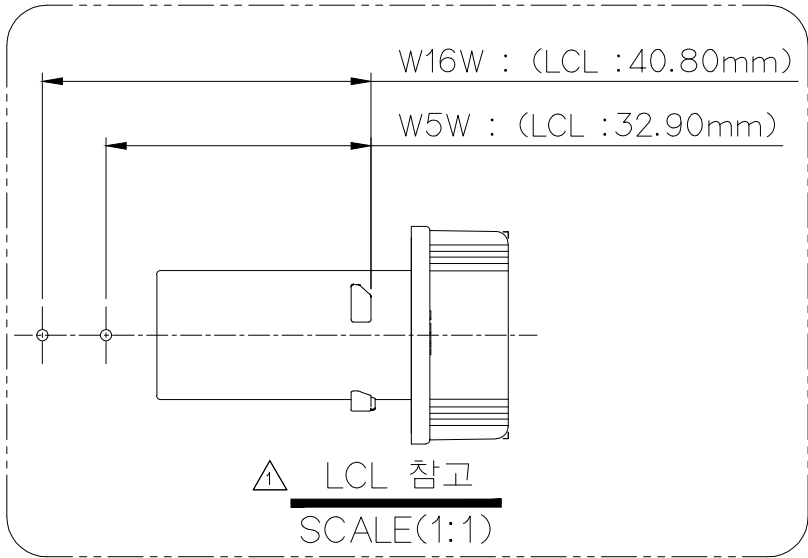
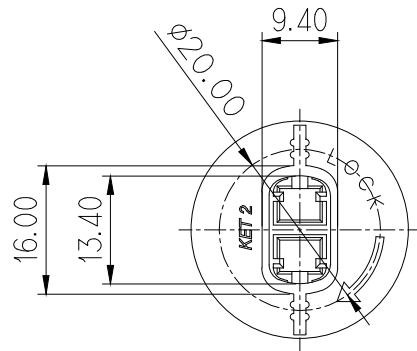


NO	PART NO.	비 고
1	MG635684-4	별도 판매 시 품번
2	MG676132-4	ASSY 구성시 품번

GENERAL TOLERANCE (HOUSING)										USED ON
10MAX	30MAX	50MAX	70MAX	100MAX	120MAX	250MAX	250VR	ANGLE	ECCENT	
±0.15	±0.20	±0.30	±0.40	±0.50	±0.75	±0.90	±1.40	±30'	0.1	


NOTE

1. UNLESS OTHERWISE SPECIFIED ALL RADII TO BE 0.3 RADIUS.
2. MUST BE FREE OF FLASH, SINK AND IMPERFECTION THAT AFFECT FUNCTION.
3. APPLICABLE TERMINAL :ST780759-1
4. 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD,MERCURY, CADMIUM,HEXAVALENT CHROMIUM,PBBs,PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

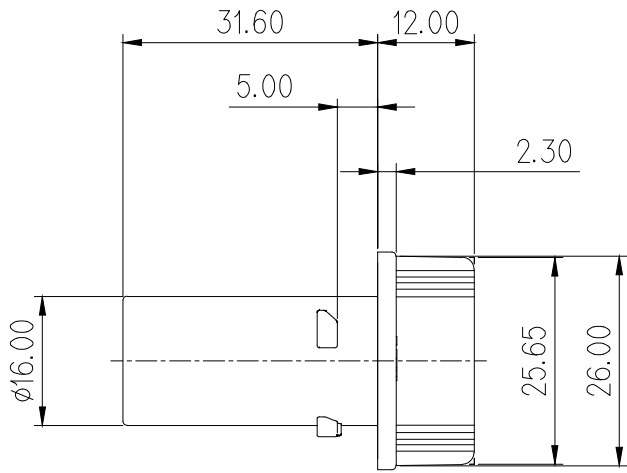

주 기

1. 지시하지 않는 R은 0.3임
- 2.기능상 유해한 BURR 및 WELDLINE등이 없을것.
- 3.적용 TERMINAL : ST780759-1
4. 제품내 함유된 6대 유해물질 (납,수은,카드뮴,6가크롬, PBBs,PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

						MATERIAL PA66+M30		 KOREA ELECTRIC TERMINAL CO., LTD.	
						FINISH GRAY			
						WIRE RANGE			
						INSULATION		CLASS	
	ECO-1607-108 근거 도면 재작성	SSY	CJH	LSY	16.07.11			TYPE	
LTR	REVISION RECORD	DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED	SEE TABLE	SCALE 1/1	PART NO. MG635684-4
DR. CJH, '13.11.25		CHK.				PART NAME			
CHK.		APP. CWK, '13.11.25				BACK-UP BULB HOLDER WP ASSY			

APPROVED

2018-12-10

KOREA ELECTRIC
TERMINAL CO., LTD.
Korea Electric Te
rminal Co., LTD.

ISSUE MARK