

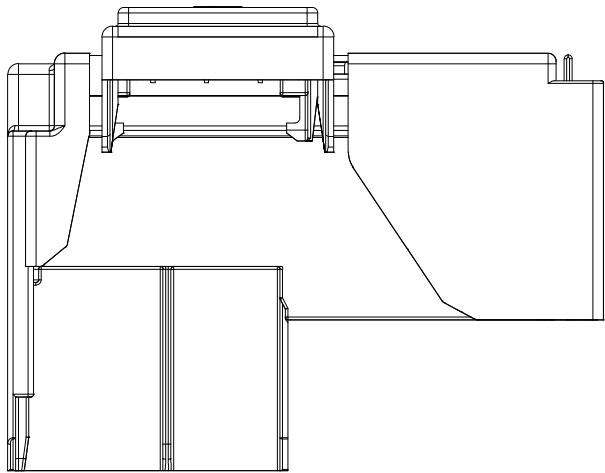
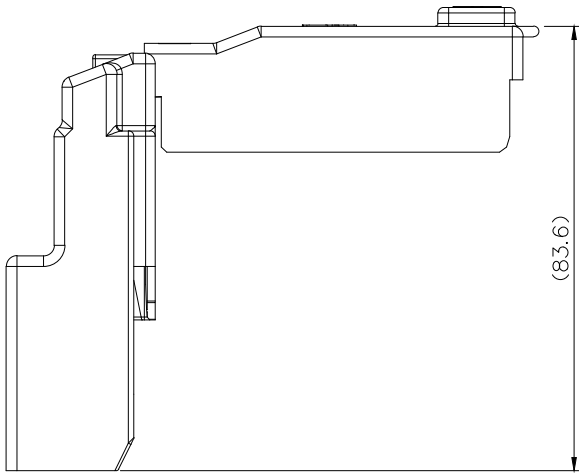
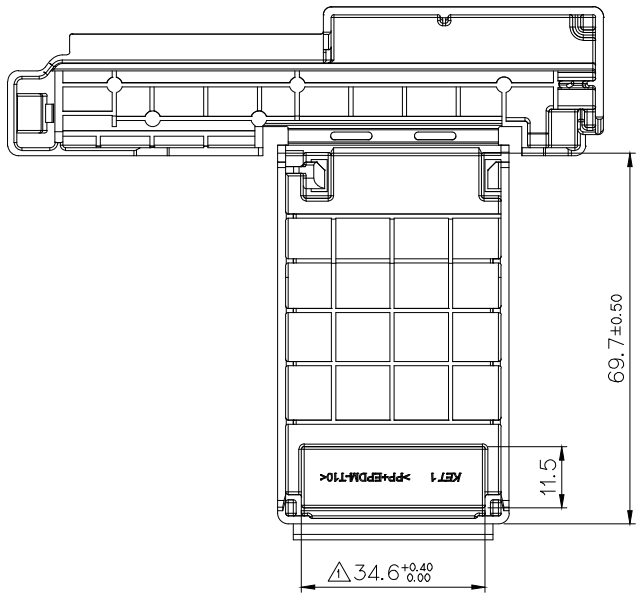
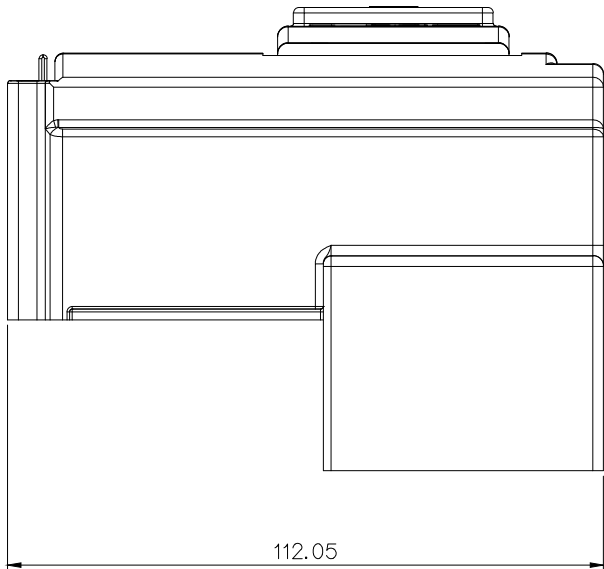


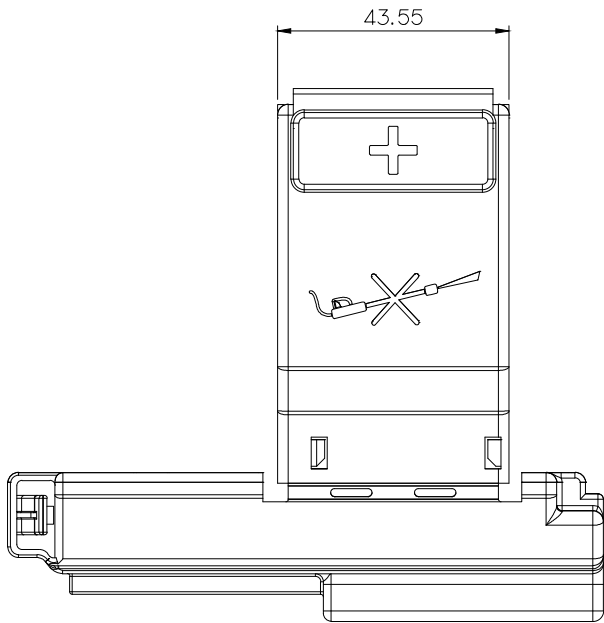

GENERAL TOLERANCE (HOUSING)							USED ON
10MAX	50MAX	100MAX	250MAX	250VR	ANGLE	ECCENT	
±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1	

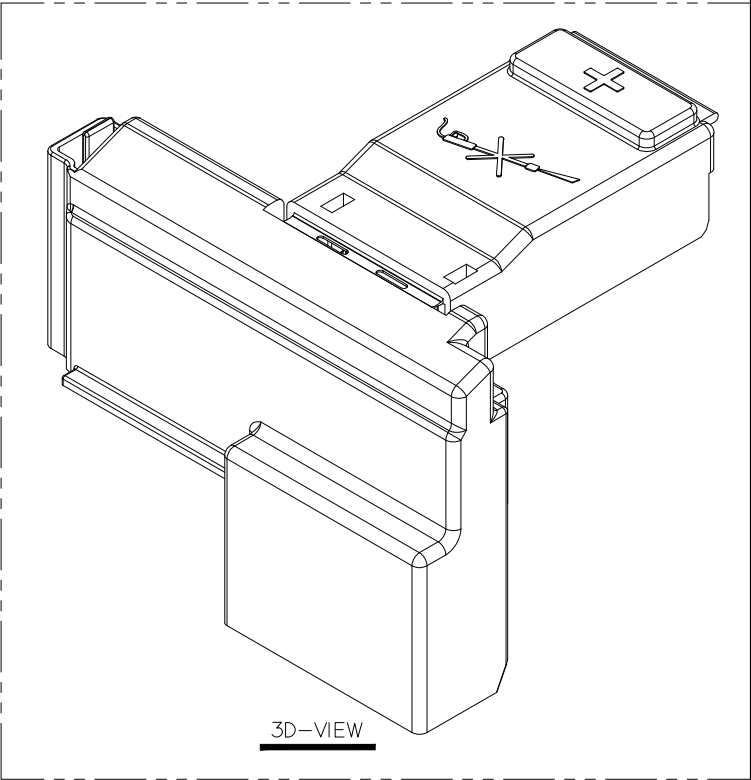

주 기

- 1. 기능상 유해한 BURR 및 FLASH 등이 없을것.
- 2. 적용 BFT 5P ASSEMBLY : MG665644

NOTE

- 1. MUST BE FREE OF BURR, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
- 2. APPLICABLE BFT 5P ASSEMBLY : MG665644



ISSUE MARK

						MATERIAL		PP+EPDM-T10		KET KOREA ELECTRIC ENGINEERED TERMINAL CO., LTD.	
						FINISH		RED			
△ ECR(1409-123) / Hinge부 형상 변경		LDS	KMK	KH	18.SEP.'14	WIRE RANGE		CLASS		FUSE	
△ RELEASED		LDS	KMK	KH	03.MAR.'14	INSULATION		TYPE		5P	
LTR REVISION RECORD		DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED		SEE TABLE	SCALE	PART NO.	MG635692-1
DR.		CHK.				PART NAME		K211 BFT 5P CAP			
CHK.		APP.									