

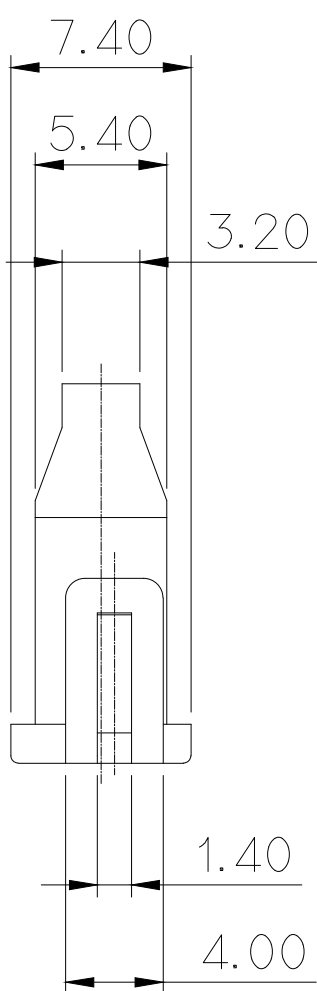

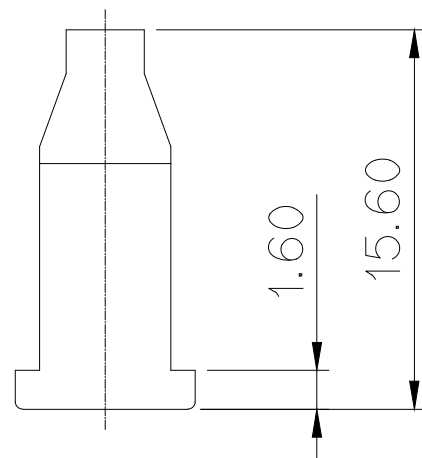


GENERAL TOLERANCE (HOUSING)							USED ON
10MAX	50MAX	100MAX	250MAX	250VR	ANGLE	ECCENT	
±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1	

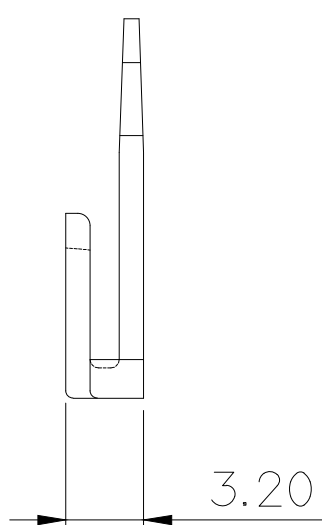

	구분	COLOR
※	-1	RED
	-2	BLUE
	-3	YELLOW
	-4	GRAY
	-5	BLACK
	-6	GREEN

주 기

- 1.기능상 유해한 FLASH, SINK,WELDLINE 등이 없을것.
- 2.적용 HOUSING : MG615564L, MG625434L
- 3.제품내 함유된 6대 유해물질 (납,수은,카드뮴,6가크롬, PBBs,PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

NOTE


1. MUST BE FREE OF FLASH, SINK, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
2. APPLICABLE HOUSING : MG615564L, MG625434L
3. 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD, MERCURY, CADMIUM, HEXAVALENT CHROMIUM, PBBs, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

APPROVED

2016-03-11

**KOREA ELECTRIC
TERMINAL CO., LTD.
Electronic Produc
t Development Team**

ISSUE MARK

					MATERIAL		PBT (V0)	 KOREA ELECTRIC TERMINAL CO., LTD.		
					FINISH		SEE TABLE			
					WIRE RANGE		CLASS			
					INSULATION		TYPE			
LTR	REVISION RECORD		DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED	SEE TABLE	SCALE	PART NO.
	DR. SMG 15.05.21		CHK. PSH 15.05.21						2/1	MG635703L
	CHK. KSH 15.05.21		APP. BUC 15.05.21		PART NAME					
1806 D/L 1P REAR HOLDER										