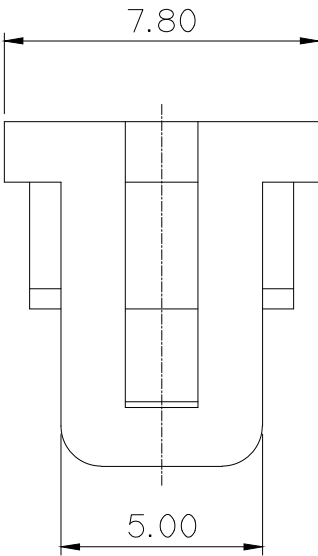

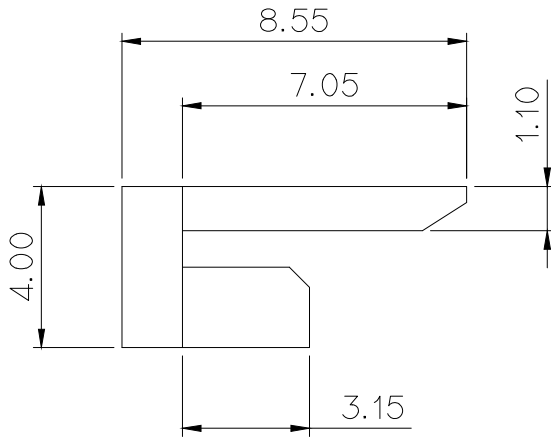
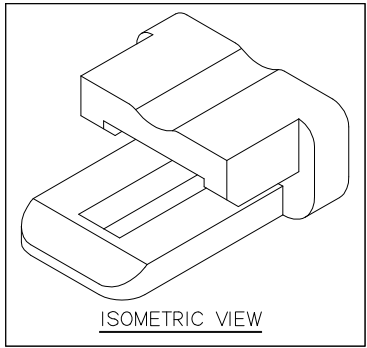


GENERAL TOLERANCE (HOUSING)							USED ON
10 MAX	50 MAX	100 MAX	250 MAX	250 VR	ANGLE	ECCENT	
±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1	

주 기

- 1.지시하지 않은 반경 R은 0.2 – 0.3로 한다.
- 2.기능상 유해한 FLASH, 수축 및 WELDLINE등이 없을것.
- 3.적용 ITEM HOUSING: MG635148
- ⚠ 4.제품 내 함유된 10대 유해물질 (납, 수은, 카드뮴, 6가 크롬 PBBs, PBDEs, DEHP, DBP, BBP, DIBP)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용농도를 초과해서는 안 된다.

NOTE

1. UNLESS OTHERWISE SPECIFIED ALL RADIUS TO BE 0.2 – 0.3 RADIUS.
2. MUST BE FREE OF FLASH, SINK ,WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
3. APPLICABLE HOUSING : MG635148
- ⚠ 4.10 HAZARDOUS SUBSTANCES IN PARTS (Lead, Mercury, Cadmium, Hexavalent Chromium, PBBs, PBDEs, DEHP, DBP, BBP, DIBP) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

NO.	COLOR
0	NATURAL
1	RED
2	BLUE
* 3	YELLOW
5	BLACK



ISSUE MARK

					MATERIAL PBT(V0)		 KOREA ELECTRIC TERMINAL CO., LTD.
					FINISH SEE TABLE		
					WIRE RANGE		
					CLASS 187		
	ECO-2011-016근거 도면 재작성	YHJ PSH	KSH	'20.11.02	INSULATION		TYPE P-Lock
LTR	REVISION RECORD	DR. CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED	SCALE 5/1	PART NO. MG635705
DR. SMG. 14. 04. 14		CHK. PSH. 14. 04. 14			PART NAME		
CHK. KSH. 14. 04. 14		APP. BUC. 14. 04. 14			187 P-Lock 1P REAR HOLDER		