

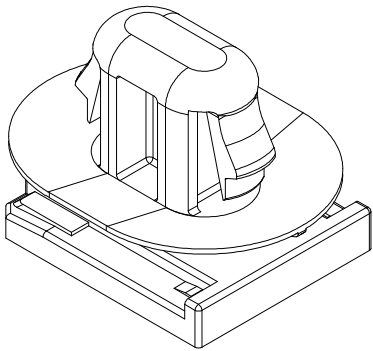

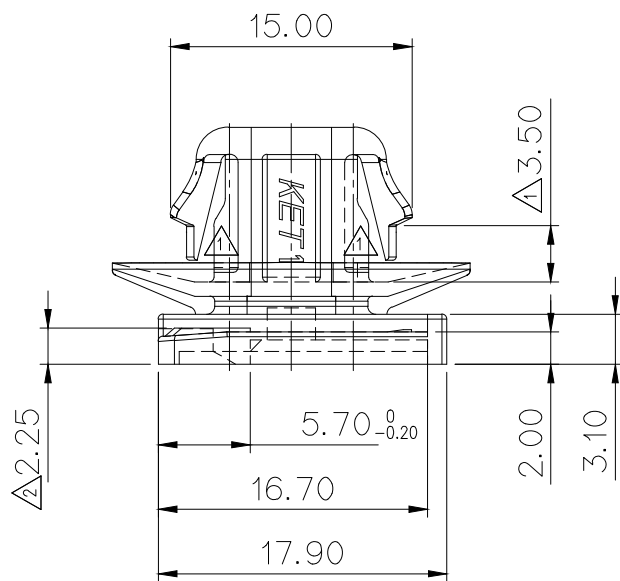
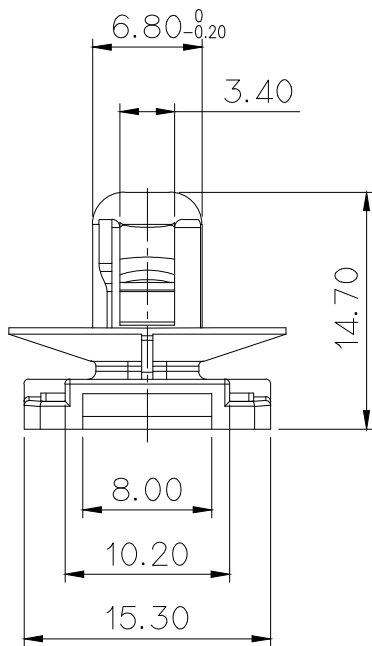


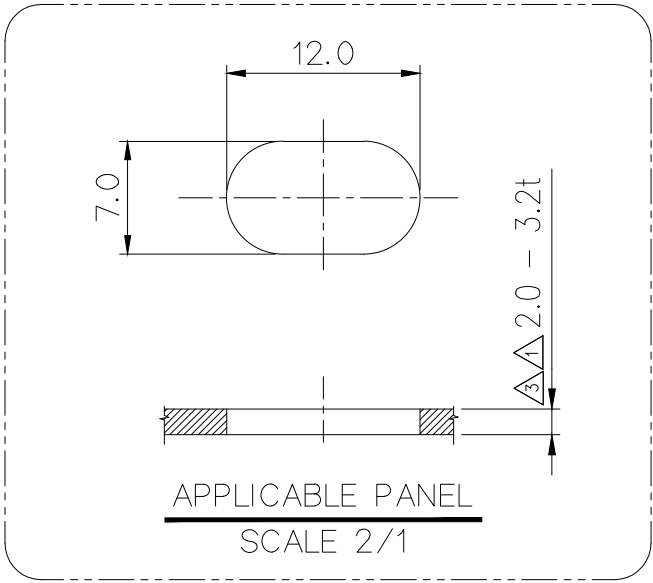

ISO VIEW

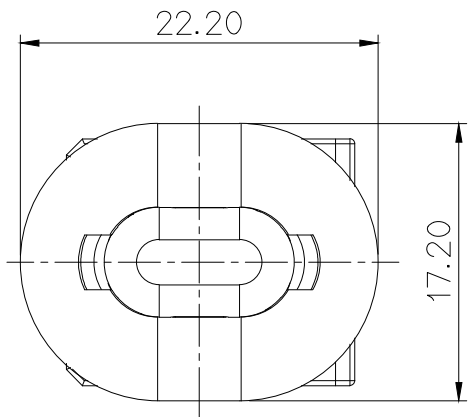

GENERAL TOLERANCE (HOUSING)										USED ON
10MAX	30MAX	50MAX	70MAX	100MAX	125MAX	250MAX	250VR	ANGLE	ECCENT	
±0.15	±0.2	±0.3	±0.4	±0.5	±0.75	±0.9	±1.4	±30'	0.1	

NOTE

- UNLESS OTHERWISE SPECIFIED ALL RADIUS TO BE 0.3 RADIUS.
- MUST BE FREE OF FLASH, SINK AND IMPERFECTION THAT AFFECT FUNCTION.
- APPLICABLE HOUSING: MG655740
- 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD,MERCURY, CADMIUM,HEXAVALENT CHROMIUM,PBBs,PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE

주 기

- 지시하지 않은 R은 0.3으로 할 것.
- 기능상 유해한 BURR, 수축, 변형등이 없을 것.
- 적용 HOUSING: MG655740
- 제품내 함유된 6대 유해물질 (납,수은,카드뮴,6가크롬, PBBs,PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

NO.	MATERIAL	COLOR
0	PA66	NATURAL
1		RED
2		BLUE
20		JADE
3		YELLOW
4		GRAY
40		DARK GRAY
41		LIGHT GRAY
* 5		BLACK
6		DARK GREEN
7		BROWN
8		LIGHT GREEN
9		MAGENTA
11		ORANGE

APPROVED

2019-11-06

KOREA ELECTRIC
TERMINAL CO., LTD.
Korea Electric Te
rminal Co., LTD.

ISSUE MARK

					MATERIAL SEE TABLE		 KOREA ELECTRIC TERMINAL CO., LTD.		
					FINISH SEE TABLE				
③	ECO-1901-358 근거 도면 재작성	KJH	HYJ	CJH	'19.01.18	WIRE RANGE		CLASS	060/375
②	ECO-1511-012 근거 도면 재작성	AJH	CKY	LSY	'15.11.02	INSULATION		TYPE	
①	ECO-1504-542 근거 도면 재작성	LJW	HYJ	LSY	'15.04.30	TOLERANCE EXCEPT AS NOTED SEE TABLE		SCALE 2/1	PART NO. MG635715
LTR	REVISION RECORD		DR.	CHK.	APP.	DATE	PART NAME 060375 WP 7M CLIP		
DR.	KTH	2014.09.01	CHK.						
CHK.	WSW	2014.09.01	APP.	HJB	2014.09.01				