


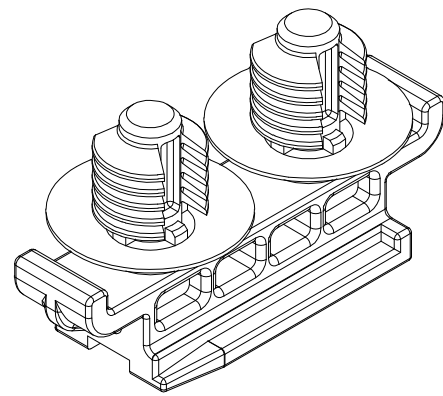
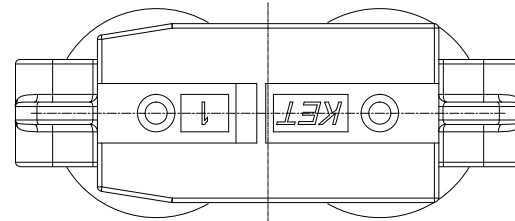


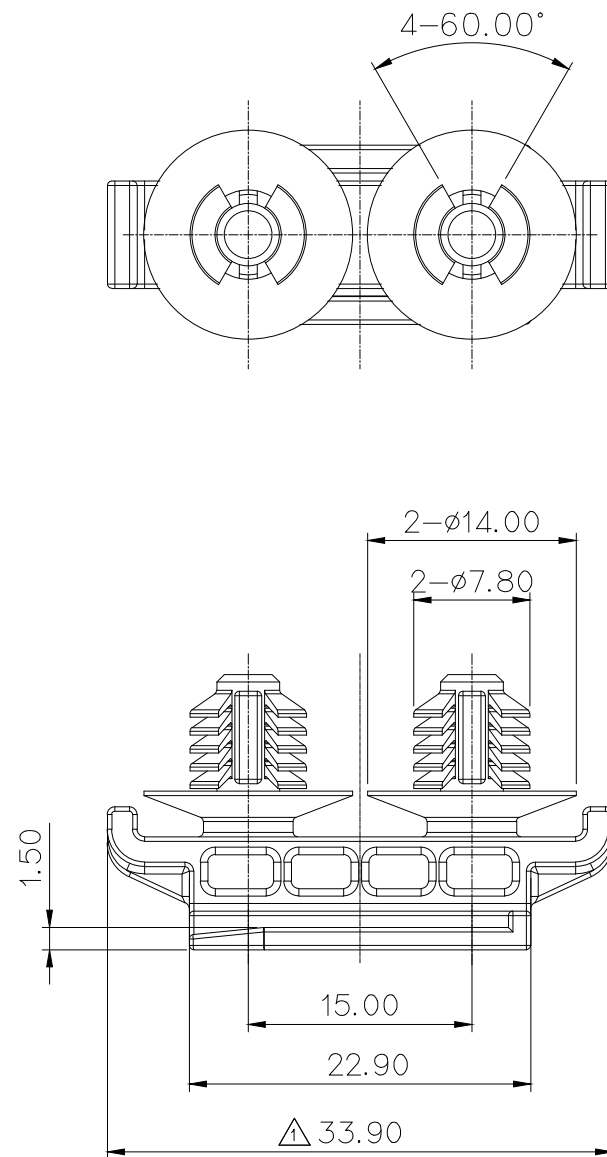

ISO VIEW

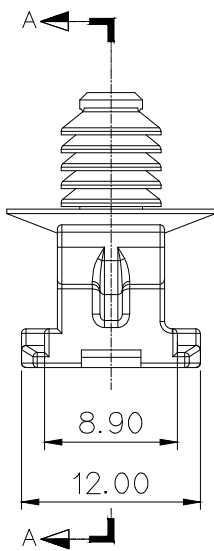

GENERAL TOLERANCE (HOUSING)									USED ON
10MAX	30MAX	50MAX	70MAX	100MAX	120MAX	250MAX	250VR	ANGLE	
±0.15	±0.20	±0.30	±0.40	±0.50	±0.75	±0.90	±1.40	±30'	


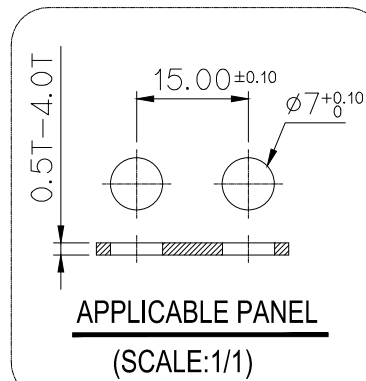


주 기

1. 지시하지 않은 반경 R은 0.3-0.5로 한다.
2. 기능상 유해한 BURR 및 WELDLINE등이 없을 것.
3. 적용 HOUSING : MG655819
4. 제품내 함유된 6대 유해물질 (납,수은,카드뮴,6가크롬, PBBs,PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

NOTE

1. UNLESS OTHERWISE SPECIFIED ALL RADIUS TO BE 0.3-0.5 RADIUS.
2. MUST BE FREE OF BURR, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
3. APPLICABLE HOUSING : MG655819
4. 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD, MERCURY, CADMIUM, HEXAVALENT CHROMIUM, PBBs, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE

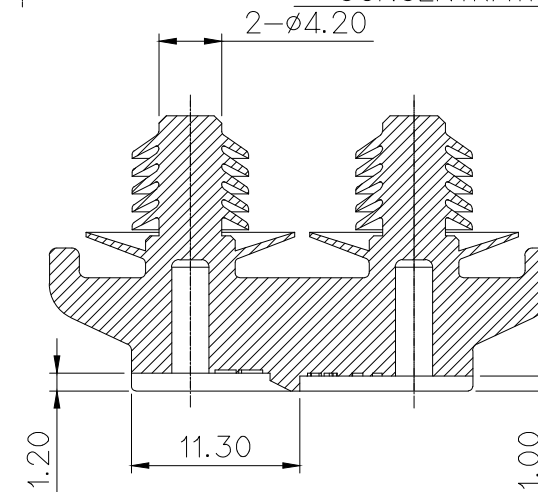

SECTION A-A

APPROVED

2016-02-26

KOREA ELECTRIC
TERMINAL CO., LTD.
Korea Electric Te
rminal Co., LTD.

ISSUED BY

KET
ENGINEERED KOREA ELECTRIC
TERMINAL CO., LTD.

						MATERIAL		SEE TABLE		terminal Co., LTD.	
						FINISH		SEE TABLE		KOREA ELECTRIC TERMINAL CO., LTD.	
	ECO-1601-199 근거 도면 재작성 CLIP재결성 개선	KJH	RJH	SUK	16.01.12	WIRE RANGE			CLASS		
	검보 합격에 따른 도면 재작성	KJH	KMH	BIN	15.08.17	INSULATION			TYPE		
LTR	REVISION RECORD	DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED		SCALE	PART NO.		
DR. KJH. 2014.07.30		CHK. HYJ. 2014.07.31				SEE TABLE		2/1	MG635719		
CHK.		APP. LSY. 2014.07.31				PART NAME					
						060 FAKRA DOUBLE CLIP					