

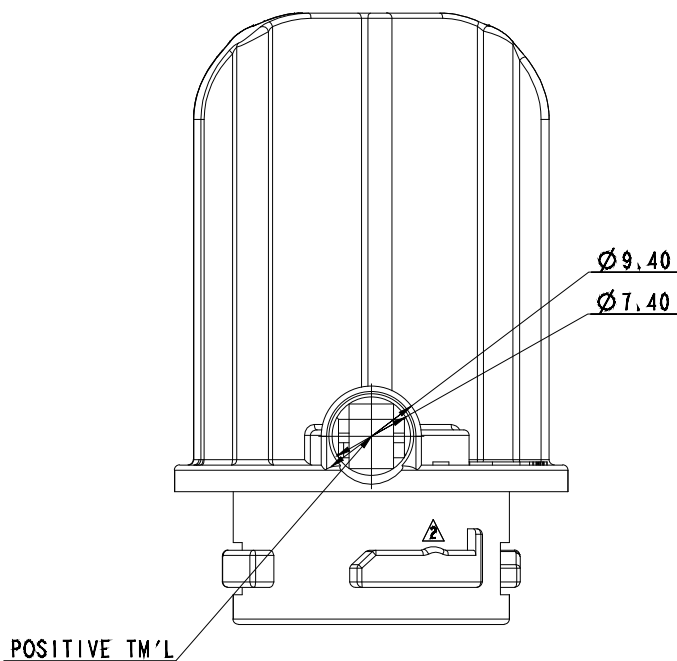



ISO VIEW

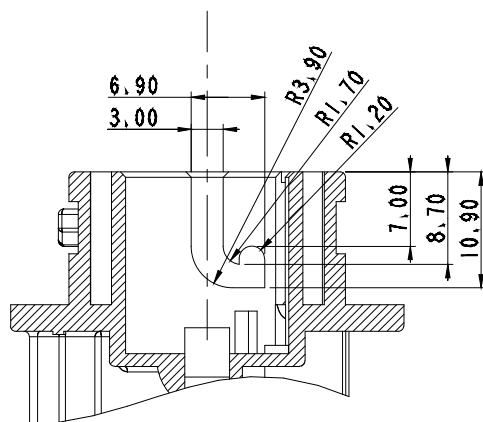


POSITIVE TM'L

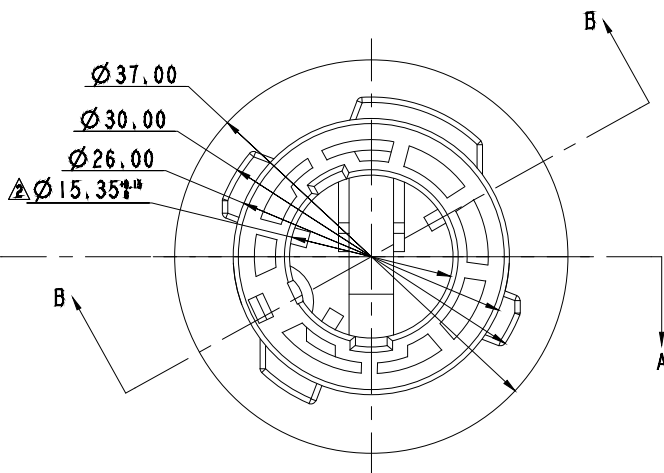

SECTION A-A

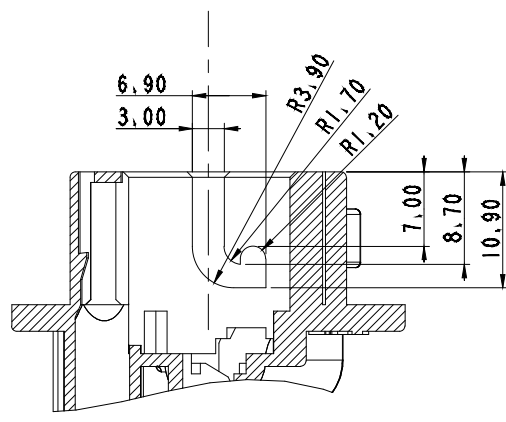

SECTION B-B

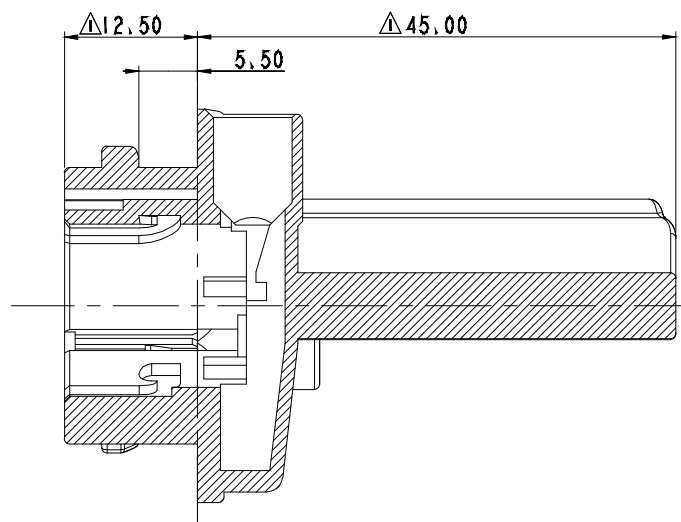


주기

1. 지시하지 않은 반경 R은 0.5로 한다.
2. 지시하지 않은 모따기 C는 0.5으로 한다.
3. 기능상 유해한 BURR 및 WELDLINE 등이 없을 것.
4. 적용 TERMINAL : ST760794(P), ST760795(E)
적용 WIRE SEAL : MG682027(P), MG682028(E)
5. 제품내 함유된 6대 유해물질 (납,수은,카드뮴,6가크롬, PBBs,PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.


NOTE

1. UNLESS OTHERWISE SPECIFIED ALL RADIUS TO BE 0.5 RADIUS.
2. UNLESS OTHERWISE SPECIFIED ALL CHAMFERS TO BE 0.5 CHAMFER.
3. MUST BE FREE OF FLASH, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
4. APPLICABLE TERMINAL : ST760794(P), ST760795(E)
APPLICABLE WIRE COVER : MG682027(P), MG682028(E)
5. 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD, MERCURY, CADMIUM, HEXAVALENT CHROMIUM, PBBs, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.


GENERAL TOLERANCE (HOUSING)										USED ON
10 MAX	30 MAX	50 MAX	70 MAX	100 MAX	120 MAX	250 MAX	250 VR	ANGLE	ECCENT	
±0.15	±0.20	±0.30	±0.40	±0.50	±0.75	±0.90	±1.4	±30°	0.1	

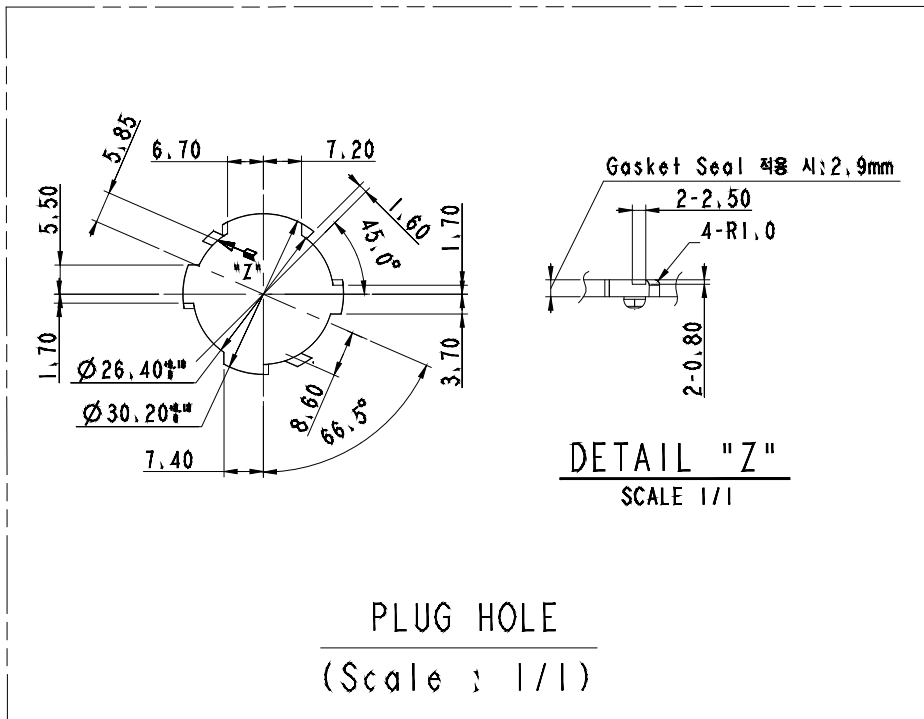

PLUG HOLE
(Scale : 1/1)

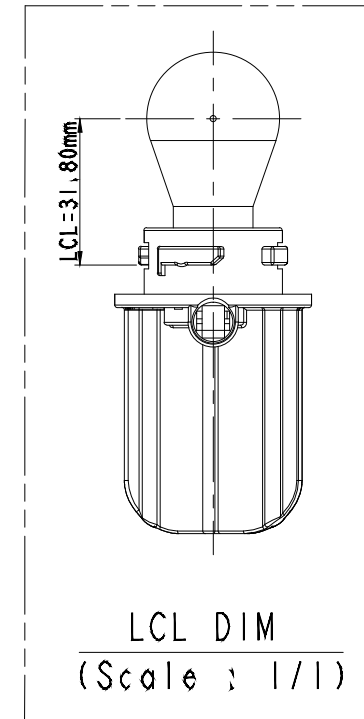

LCL DIM
(Scale : 1/1)

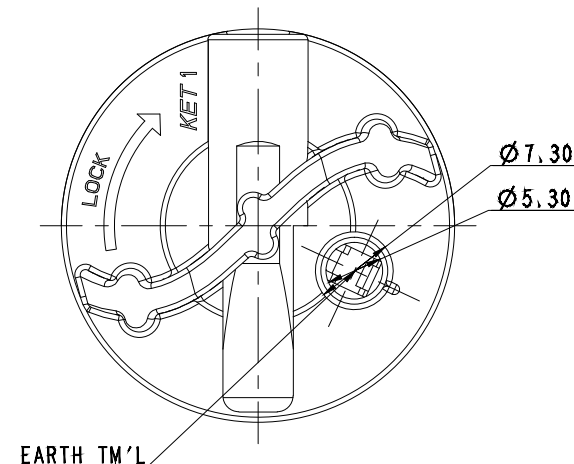

EARTH TM'L

APPROVED

2018-12-10

KOREA ELECTRIC
TERMINAL CO., LTD.
Connector Development Team 3

ISSUE MARK

						MATERIAL		PA66+MR30%	 KOREA ELECTRIC TERMINAL CO., LTD.		
						FINISH		L/GRAY			
						WIRE RANGE		-			
						INSULATION		-			
	ECO-1501-09A	근거 도면 제작	LHJ	SSH	FIN	'18.01.14			CLASS	-	
	ECO-1410-008	근거 도면 제작	LHJ	SSH	FIN	'14.10.01			TYPE	-	
LTR	REVISION RECORD		DR	CHK	APP	DATE	NO CHANGE PERMITTED ON THIS	SEE TABLE	SCALE 2/1	PART NO.	MG635726-41
DR, LHJ 2014.09.18			CHK,								
CHK, SON, S, H 2014.09.19			APP, BIN 2014.09.19			PART-NAME					
 RCL Bulb Socket											