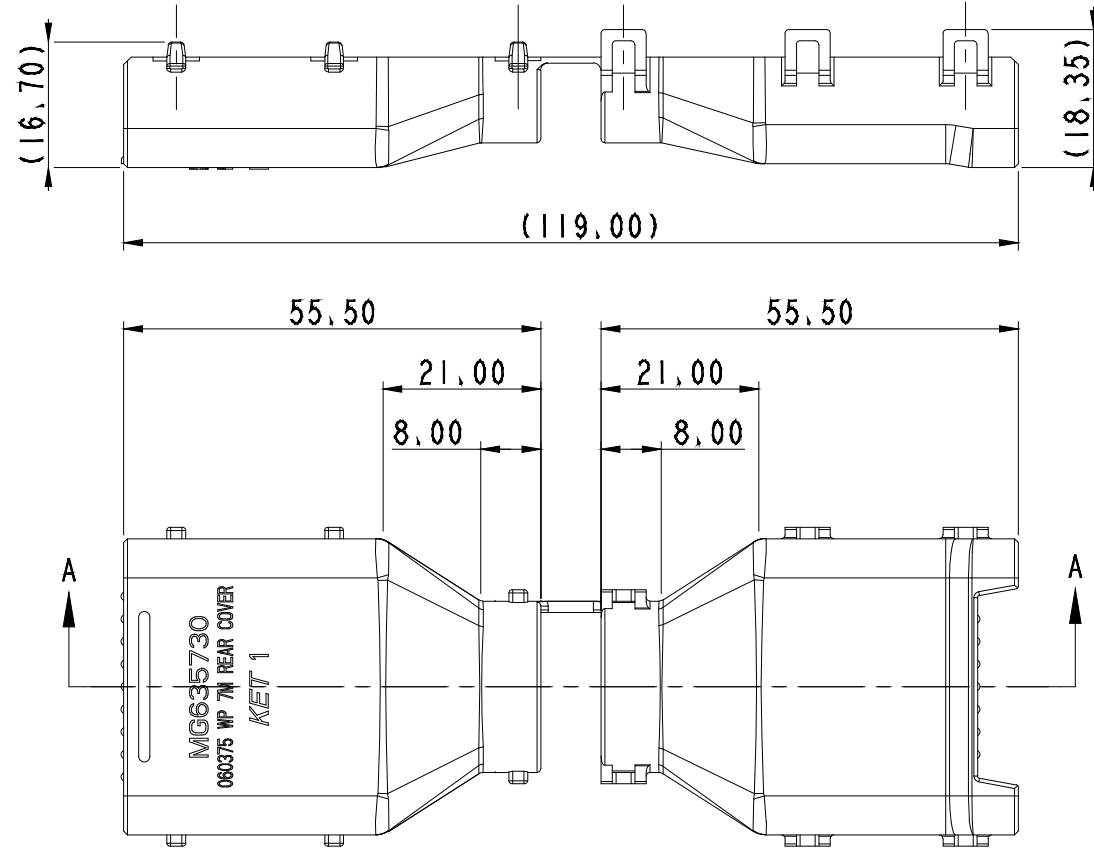
ISO VIEW
SCALE 1/2


NO.	MATERIAL	COLOR
0	PA66	NATURAL
1		RED
2		BLUE
20		JADE
3		YELLOW
4		GRAY
40		DARK GRAY
41		LIGHT GRAY
* 5		BLACK
6		DARK GREEN
7		BROWN
8		LIGHT GREEN
9		MAGENTA
11		ORANGE

NOTE



1. UNLESS OTHERWISE SPECIFIED ALL RADIUS TO BE 0.3 ~ 0.5 RADIUS.
2. UNLESS OTHERWISE SPECIFIED ALL CHAMFERS TO BE 0.3 ~ 0.5 CHAMFER.
3. MUST BE FREE OF FLASH, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
4. APPLICABLE HOUSING ; MG655740-5
5. APPLICABLE CORRUGATED TUBE ; $\phi 14.0$
6. HOUSING ETCHING SPEC ; KDP-6A
7. 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD, MERCURY, CADMIUM, HEXAVALENT CHROMIUM, PBBs, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

GENERAL TOLERANCE (HOUSING)

10 MAX	30 MAX	50 MAX	70 MAX	100 MAX	120 MAX	250 MAX	250 VR	ANGLE	ECCENT	USED ON
± 0.15	± 0.2	± 0.3	± 0.4	± 0.5	± 0.75	± 0.9	± 1.4	$\pm 30'$	0.1	

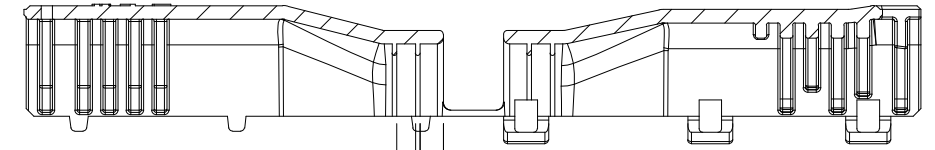4-0.60
3.10
6.20

SECTION A-A

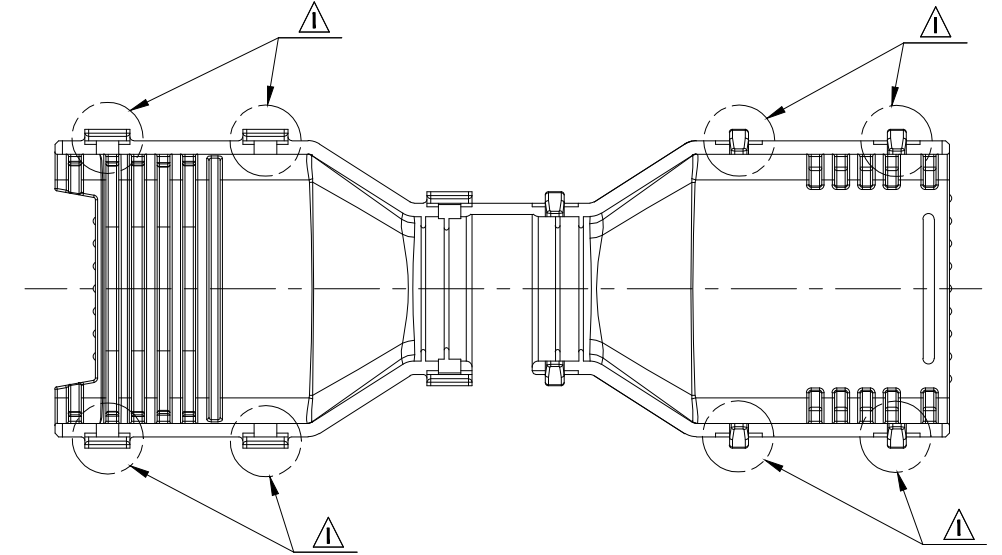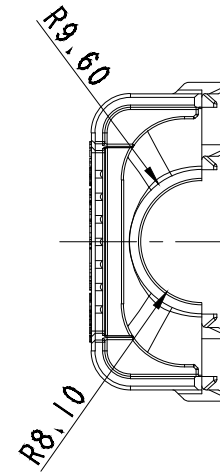

주 기

1. 지시하지 않은 반경 R은 0.3 ~ 0.5로 한다.
2. 지시하지 않은 모따기 C는 0.3 ~ 0.5로 한다.
3. 기능상 유해한 BURR 및 WELDLINE 등이 없을 것.
4. 적용 HOUSING ; MG655740-5
5. 적용 CORRUGATED TUBE ; $\phi 14.0$
6. HOUSING 표면 부식 사양 ; KDP-6A
7. 제품내 함유된 6대 유해물질 (납, 수은, 카드뮴, 6가크롬, PBBs, PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

APPROVED

2021-11-03

KOREA ELECTRIC
TERMINAL CO., LTD.
Korea Electric Te
rminal Co., LTD.

ISSUE MARK

						MATERIAL	SEE TABLE	 KOREA ELECTRIC TERMINAL CO., LTD.		
						FINISH	SEE TABLE			
						WIRE RANGE	-		CLASS	060+375
						INSULATION	-		TYPE	REAR COVER
	ECO-2101-216 파본 도면 제작	LND	KSC	CJH	21.01.25					
LTR	REVISION RECORD	DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED	SEE TABLE	SCALE 1/1	PART NO. MG635730	
DR.	JJH 15/03/20	CHK.	AJH	15/03/20						
CHK.	KMH 15/03/20	APP.	LSY	15/03/20						
PART_NAME							060375 WP 7M REAR COVER			