

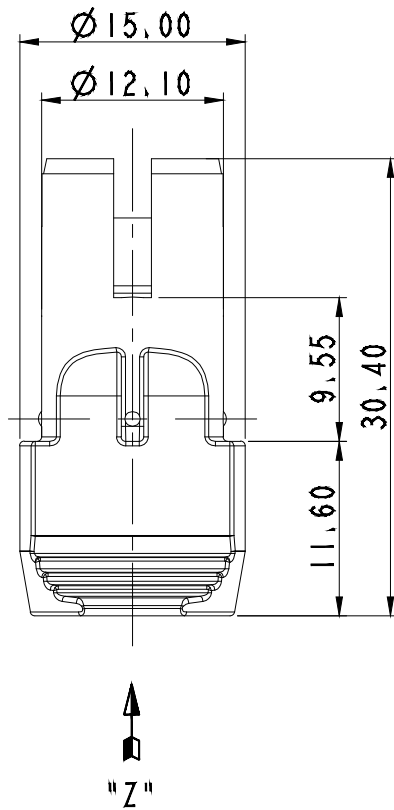




ISO VIEW
SCALE 1/1

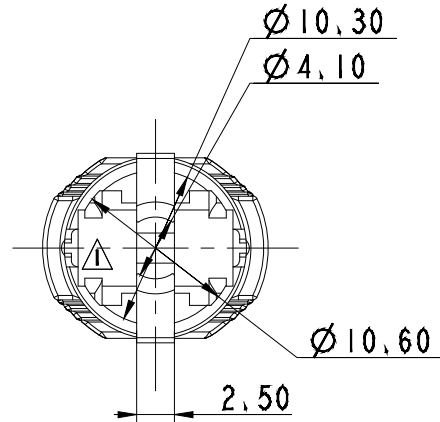

GENERAL TOLERANCE (HOUSING)										USED ON
10 MAX	30 MAX	50 MAX	70 MAX	100 MAX	120 MAX	250 MAX	250 VR	ANGLE	ECCENT	
±0.15	±0.2	±0.3	±0.4	±0.5	±0.75	±0.90	±1.4	±30°	0.1	

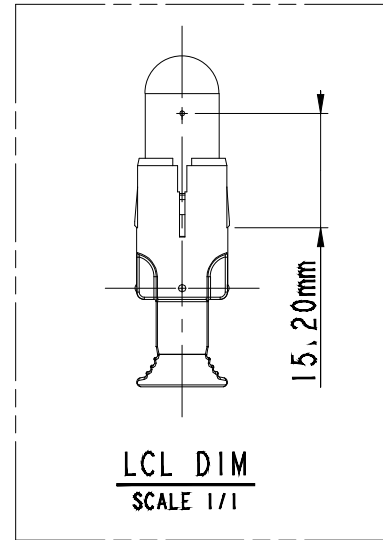

- 주 기
- 1, 지시하지 않은 반경 R은 0.3로 한다,
 - 2, 기능상 유해한 BURR 및 WELDLINE등이 없을 것,
 - 3, 적용 TERMINAL ; ST780759
 - 4, 제품내 함유된 6대 유해물질 (납, 수은, 카드뮴, 6가크롬, PBBs, PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다,
- NOTES
- 1, UNLESS OTHERWISE SPECIFIED ALL RADIUS TO BE 0.3 RADIUS,
 - 2, MUST BE FREE OF FLASH, SINK AND IMPERFECTION THAT AFFECT FUNCTION,
 - 3, APPLICABLE TERMINAL ; ST780759
 - 4, 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD, MERCURY, CADMIUM, HEXAVALENT CHROMIUM, PBBs, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

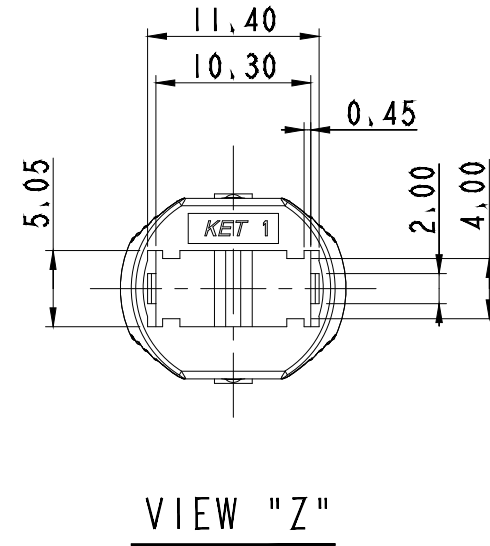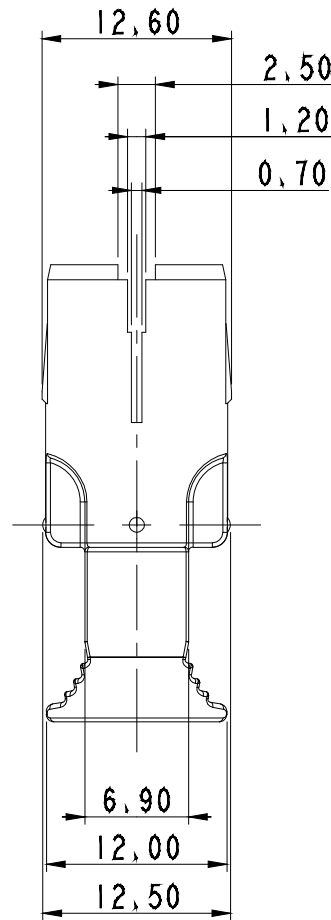

APPROVED

2016-03-07

KOREA ELECTRIC
TERMINAL CO., LTD.
Connector Develop
ment Team 3

ISSUE MARK

					MATERIAL	NORYL	 KOREA ELECTRIC TERMINAL CO., LTD.						
					FINISH	BLACK							
					WIRE RANGE	-		CLASS	-				
					INSULATION	-		TYPE	-				
	ECO-1501-023 근거 도면 제작성			LHJ	SSH	BIN	'15.02.02						
LTR	REVISION RECORD			DR,	CHK,	APP,	DATE	TOLERANCE EXCEPT AS NOTED	SEE TABLE	SCALE 2/1	PART NO.	MG635732-5	
DR, LHJ 2015.01.05				CHK,									
CHK, S.H.SON 2015.01.05				APP, BIN 2015.01.05				PART_NAME					POSITION BULB SOCKET