

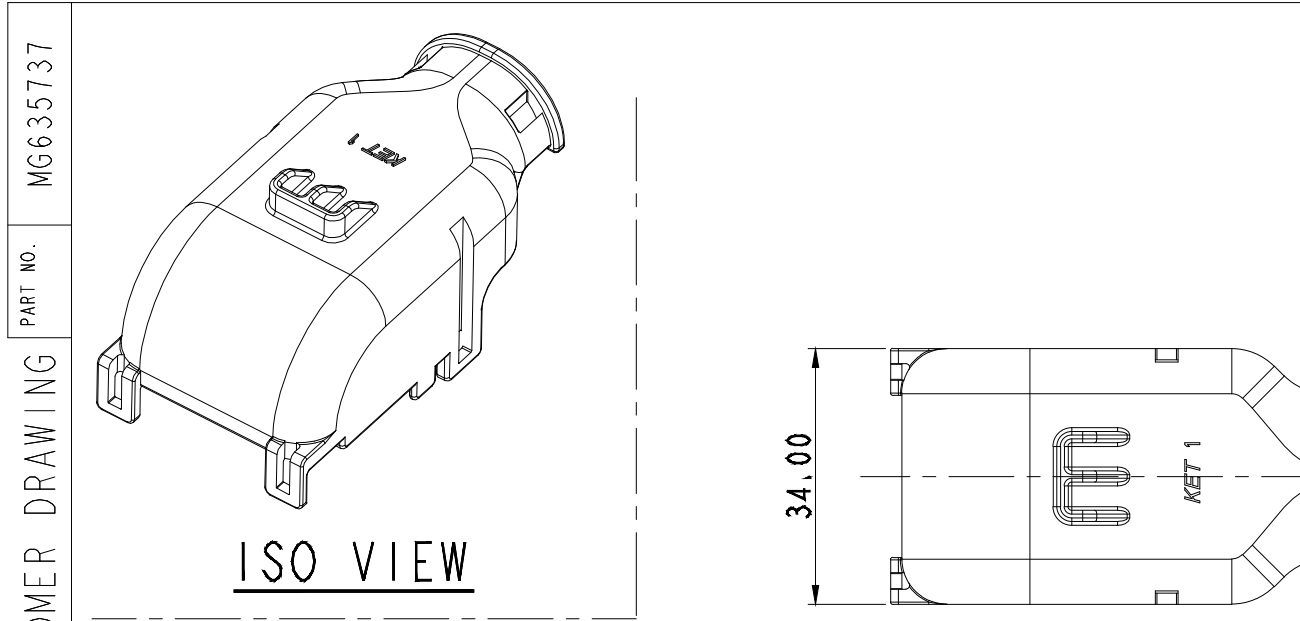
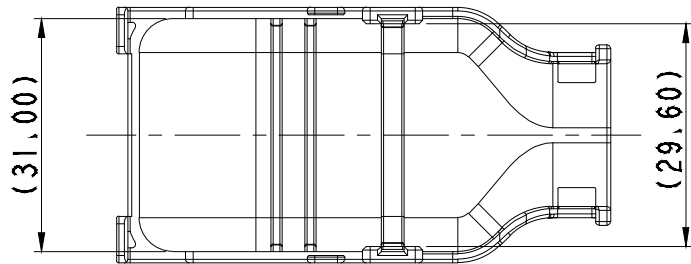
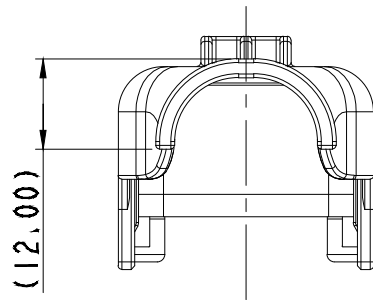
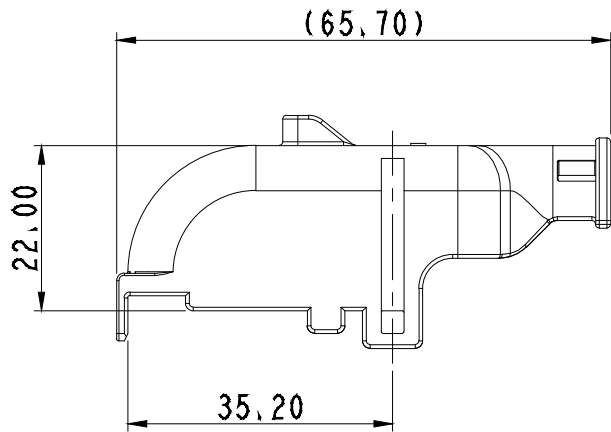


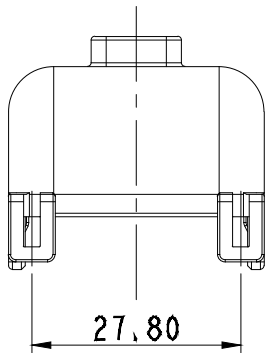

GENERAL TOLERANCE (HOUSING)										USED ON
10 MAX	30MAX	50 MAX	70MAX	100 MAX	120MAX	250 MAX	250 VR	ANGLE	ECCENT	
±0.15	±0.2	±0.3	±0.4	±0.55	±0.75	±0.95	±1.4	±30°	0.1	

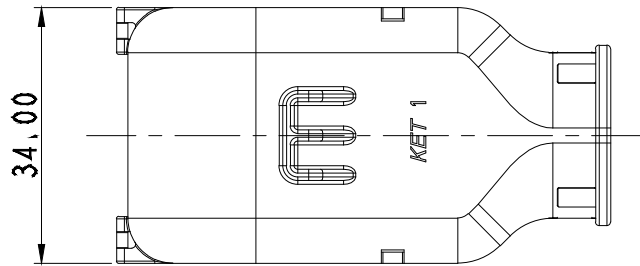

- 주 기
- 1、지시하지 않은 반경 R은 0.5로 한다,
 - 2、지시하지 않은 모따기 C는 0.5으로 한다,
 - 3、기능상 유해한 BURR 및 WELDLINE 등이 없을 것,
 - 4、적용 CONNECTOR: MG655730
 - 5、KET 문자: 기울기 15° (H: 0.1~0.2, SIZE: 2.0)
CAVITY NO.: 기울기 0° (H: 0.1~0.2, SIZE: 2.0)
 - 6、HOUSING 표면 부식 사양: KDP-6A
 - 7、수축률 2% 이하로 관리 한다,
 - 8、제품내 함유된 6대 유해물질 (납, 수은, 카드뮴, 6가크롬, PBBs, PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다,
 - 9、LEVER 유동 방지를 위해 WIRE COVER를 필히 적용 할 것,
- NOTE
- 1、UNLESS OTHERWISE SPECIFIED ALL RADIUS TO BE 0.5 RADIUS,
 - 2、UNLESS OTHERWISE SPECIFIED ALL CHAMFERS TO BE 0.5 CHAMFER,
 - 3、MUST BE FREE OF FLASH, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION,
 - 4、APPLICABLE CONNECTOR: MG655730
 - 5、KET MARK : TAPER 15° (H: 0.1~0.2, SIZE: 2.0)
CAVITY NO. : TAPER 0° (H: 0.1~0.2, SIZE: 2.0)
 - 6、HOUSING ETCHING SPEC: KDP-6A
 - 7、SHRINKAGE IS LESS THAN 2% MANAGEMENT,
 - 8、6 HAZARDOUS SUBSTANCES IN PARTS (LEAD, MERCURY, CADMIUM, HEXAVALENT CHROMIUM, PBBs, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.YOU MUST APPLY THE WIRE COVER,
 - 9、YOU MUST APPLY THE WIRE COVER, IN ORDER TO PREVENT WOBBLING OF LEVER,

NO.	MATERIAL	COLOR
0	P.P	NATURAL
1		RED
2		BLUE
20		JADE
3		YELLOW
4		GRAY
40		DARK GRAY
41		LIGHT GRAY
* 5		BLACK
6		DARK GREEN
7		BROWN
8		LIGHT GREEN
9		MAGENTA
11		ORANGE

						MATERIAL	SEE TABLE	KIETENGINEERED KOREA ELECTRIC TERMINAL CO., LTD.	
						FINISH	SEE TABLE		
						WIRE RANGE	-	CLASS	HYBRID
						INSULATION	-	TYPE	025/060/110
						TOLERANCE EXCEPT AS NOTED	SEE TABLE	SCALE 1/1	PART NO. MG635737
						PART_NAME	025060110 68F WIRE COVER		



ISSUE MARK

(DIMENSIONS IN MM)