
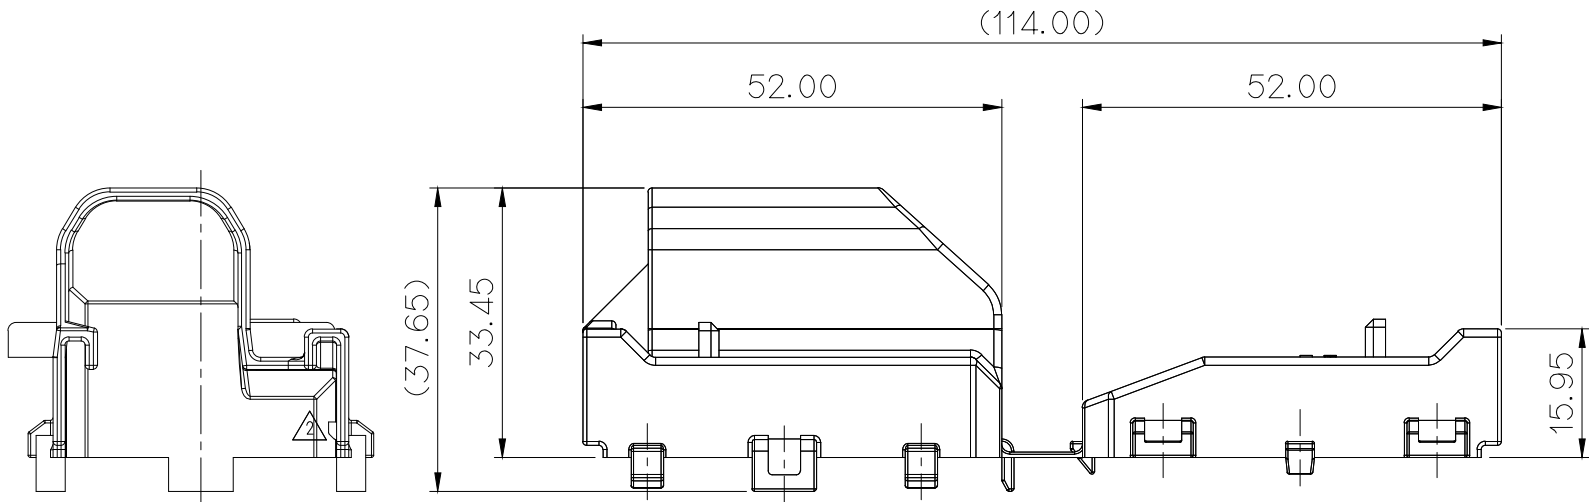


ISO VIEW


(S= 1/2)

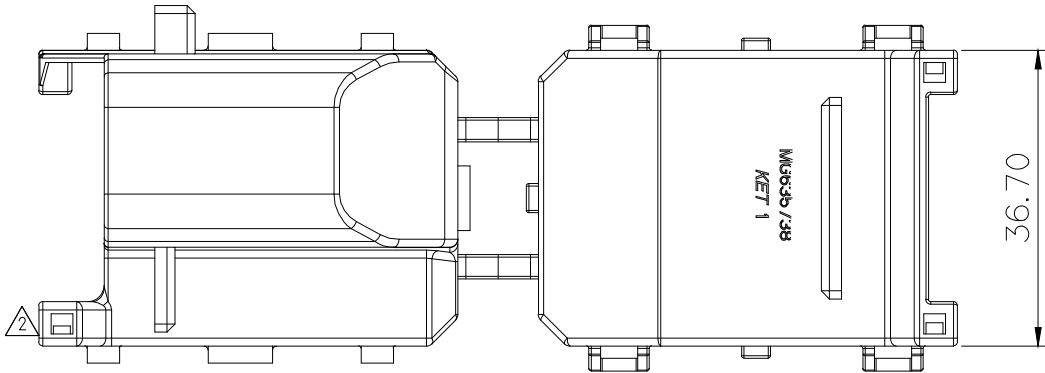


GENERAL TOLERANCE (HOUSING)										USED ON
10MAX	30MAX	50MAX	70MAX	100MAX	120MAX	250MAX	250VR	ANGLE	ECCENT	
±0.15	±0.2	±0.3	±0.4	±0.5	±0.75	±0.9	±1.4	±30'	0.1	

NOTE

- MUST BE FREE OF FLASH, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
- APPLICABLE CONNECTOR : MG645911
- 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD,MERCURY, CADMIUM,HEXAVALENT CHROMIUM,PBBs,PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

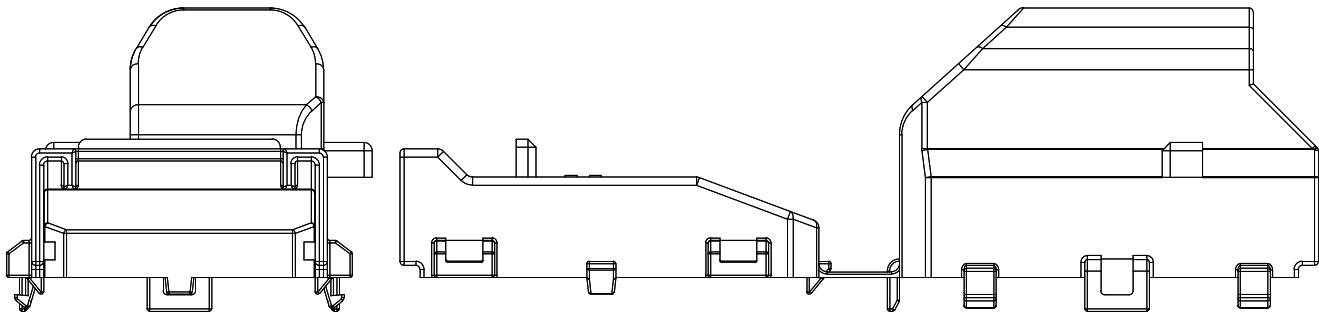

NO.	MATERIAL	COLOR
0	PP	NATURAL
1		RED
2		BLUE
20		JADE
3		YELLOW
4		GRAY
40		DARK GRAY
41		LIGHT GRAY
* 5		BLACK
6		DARK GREEN
7		BROWN
8		LIGHT GREEN
9		MAGENTA
11		ORANGE

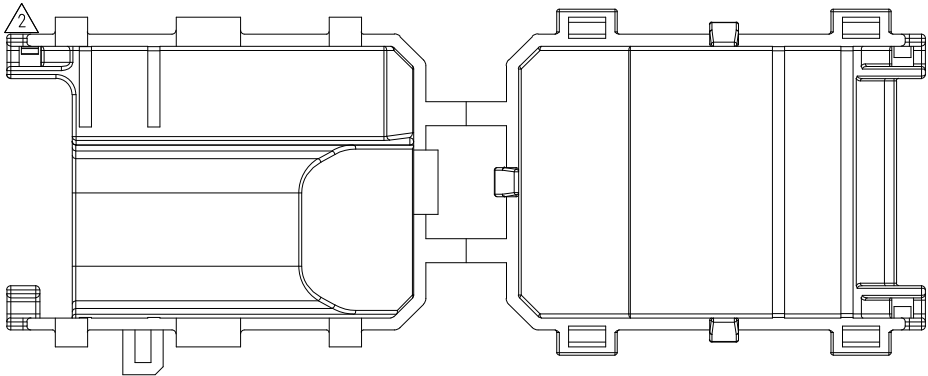

주 기

- 기능상 유해한 BURR 및 WELDLINE 등이 없을 것.
- 적용 CONNECTOR : MG645911
- 제품내 함유된 6대 유해물질 (납,수은,카드뮴,6가크롬, PBBs,PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

						MATERIAL SEE TABLE		 KOREA ELECTRIC TERMINAL CO., LTD.	
						FINISH SEE TABLE			
3	ECO-1510-114에 근거 도면 재작성 도면 현실화	AYT	RJH	SUK	'15.10.07	WIRE RANGE		CLASS	
2	ECO-1507-029에 근거 도면 재작성 체결력 향상을 위한 돌기부 추가	JH.K	HYJ	SUK	'15.07.01	INSULATION		TYPE 025/060/110/FAKRA	
1	ECO-1502-189에 근거 도면 재작성	YM.K	HYJ	LSY	'15.02.10	TOLERANCE EXCEPT AS NOTED SEE TABLE		SCALE 1/1	PART NO. MG635738
LTR	REVISION RECORD		DR.	CHK.	APP.	DATE			
DR.	YM.K	2015.01.28	CHK.						
CHK.	HYJ	01/28	APP.	LSY	01/28	025060110 36M WIRE COVER (FAKRA)			

APPROVED

2016-02-26

KOREA ELECTRIC
TERMINAL CO., LTD.
Korea Electric Te
rminal Co., LTD.

ISSUE MARK