



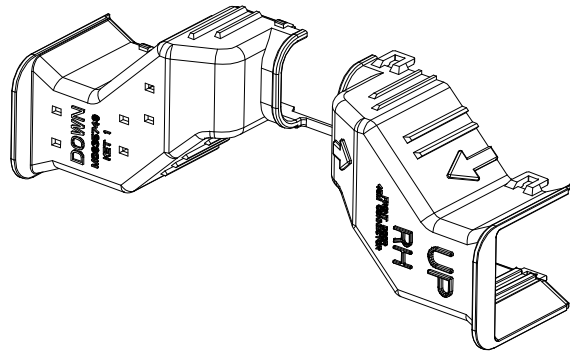

ISO VIEW

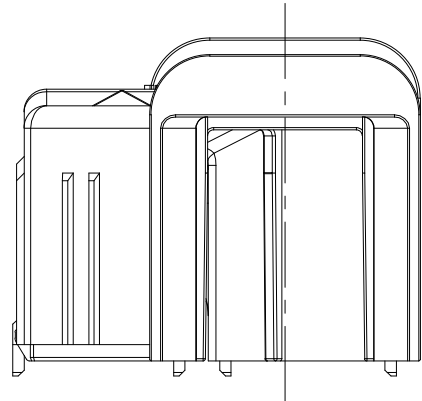




NO.	MATERIAL	COLOR
0	P P	NATURAL
1		RED
2		BLUE
20		JADE
3		YELLOW
* 4		GRAY
40		DARK GRAY
41		LIGHT GRAY
5		BLACK
6		DARK GREEN
7		BROWN
8		LIGHT GREEN
9		MAGENTA
11		ORANGE

NOTE

1. UNLESS OTHERWISE SPECIFIED ALL RADIUS TO BE 0.3 RADIUS.
2. UNLESS OTHERWISE SPECIFIED ALL CHAMFERS TO BE 0.3 CHAMFER.
3. MUST BE FREE OF FLASH, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
4. APPLICABLE MALE ASSY: MG645857
5. KET MARK ; TAPER 15° (H; 0.1~0.2, SIZE; 1.5)
6. HOUSING ETCHING SPEC ; KDP-6A
7. 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD, MERCURY, CADMIUM, HEXAVALENT CHROMIUM, PBBs, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

GENERAL TOLERANCE (HOUSING)

10 MAX	30 MAX	50 MAX	70 MAX	100 MAX	120 MAX	250 MAX	250 VR	ANGLE	ECCENT	USED ON
±0.15	±0.2	±0.3	±0.4	±0.5	±0.75	±0.9	±1.4	±30'	0.1	

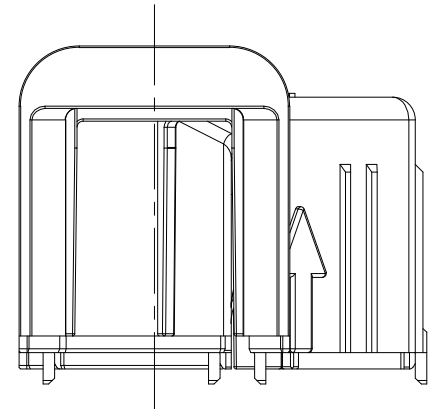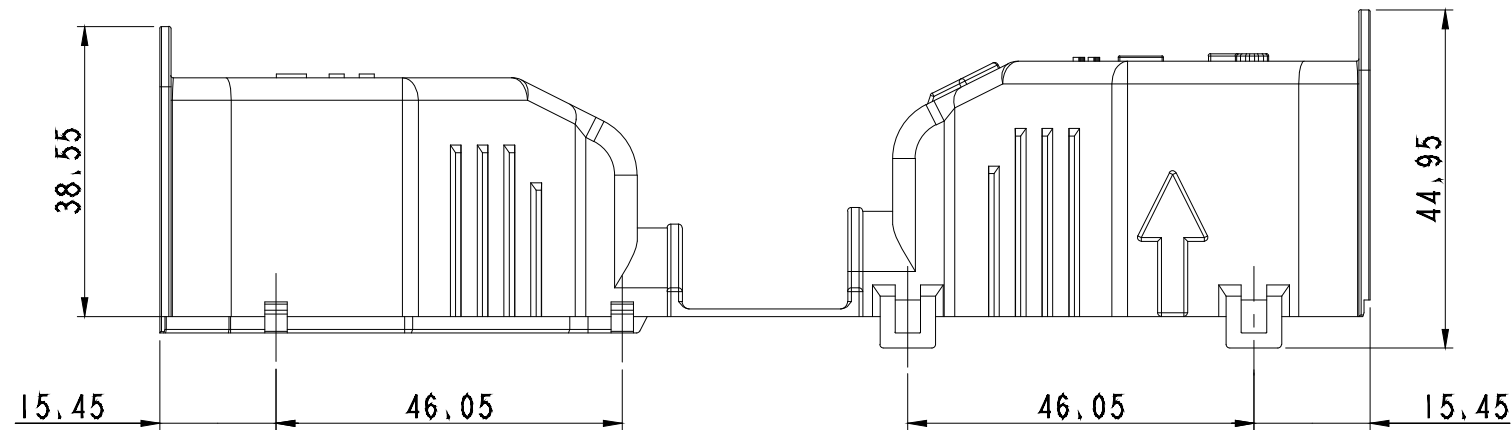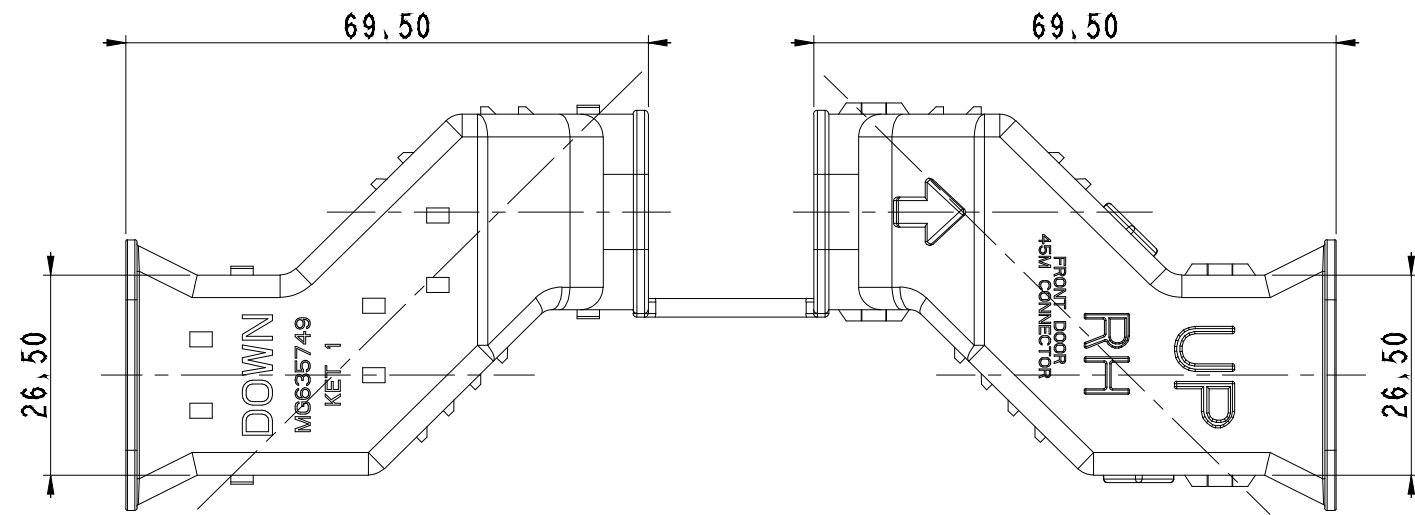

주 기

1. 지시하지 않은 반경 R은 0.3로 한다.
2. 지시하지 않은 모따기 C는 0.3으로 한다.
3. 기능상 유해한 BURR 및 WELDLINE 등이 없을 것.
4. 적용 MALE ASSY: MG645857
5. KET 문자 ; 기울기 15° (H; 0.1~0.2, SIZE; 1.5)
6. CAVITY NO. ; 기울기 0° (H; 0.1~0.2, SIZE; 1.5)
7. HOUSING 표면 부식 사양: KDP-6A
7. 제품내 함유된 6대 유해물질 (납, 수은, 카드뮴, 6가크롬, PBBs, PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

APPROVED

2016-03-11

KOREA ELECTRIC
TERMINAL CO., LTD.
Korea Electric Te
rminal Co., LTD.

ISSUE MARK

						MATERIAL	SEE TABLE	 KOREA ELECTRIC TERMINAL CO., LTD.	
						FINISH	SEE TABLE		
						WIRE RANGE			CLASS
						INSULATION		TYPE 025/060/110/FAKRA	
	경사 성적서 활력에 따른 도면 제작성	LJW	HYJ	SUK	15,08,24	TOLERANCE EXCEPT AS NOTED	SEE TABLE	SCALE 1/1	PART NO. MG635749
LTR	REVISION RECORD	DR,	CHK,	APP,	DATE	PART_NAME FRONT DOOR 45M WIRE COVER_RH			
DR,	LJW 2015, 03, 25	CHK,							
CHK,	KMH 2015, 03, 25	APP, LSY 2015, 03, 25							

△	검사 성적서 합격에 따른 도면 제작성	LJW	HYJ	SUK	15.08.24
LTR	REVISION RECORD	DR.	CHK.	APP.	DATE
DR.	LJW 2015.03.25	CHK.			
CHK.	KMH 2015.03.25	APP.	LSY	2015.03.25	