

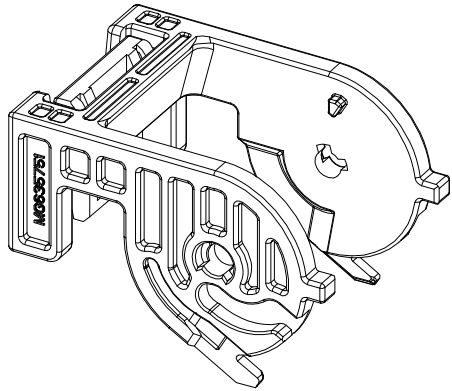
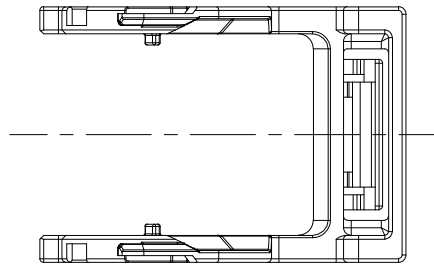
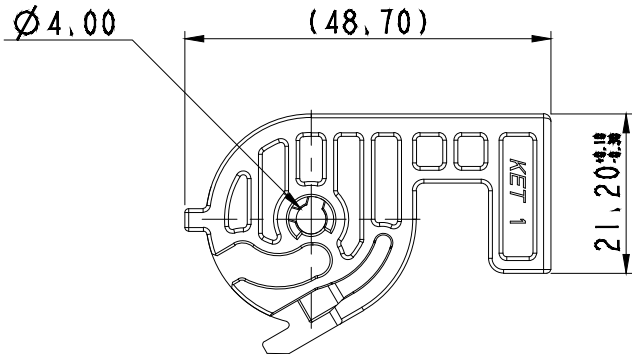


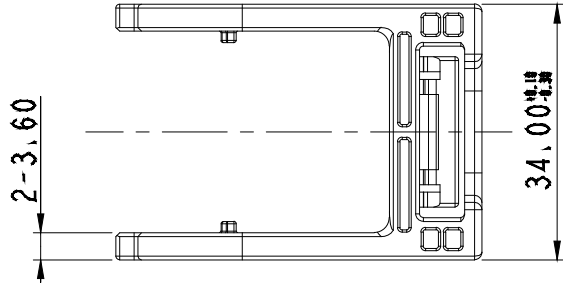

ISO VIEW



GENERAL TOLERANCE (HOUSING)

10 MAX	30 MAX	50 MAX	70 MAX	100 MAX	120 MAX	250 MAX	250 VR	ANGLE	ECCENT	USED ON
±0.15	±0.2	±0.3	±0.4	±0.5	±0.75	±0.9	±1.4	±30°	0.1	

주 기

1. 지시하지 않은 반경 R은 0.3로 한다.
2. 지시하지 않은 모따기 C는 0.3으로 한다.
3. 기능상 유해한 BURR 및 WELDLINE 등이 없을 것.
4. 적용 HOUSING: MG656798
5. KET 문자: 기울기 15° (H: 0.1~0.2, SIZE: 1.5)
CAVITY NO.: 기울기 0° (H: 0.1~0.2, SIZE: 2.0)
6. HOUSING 표면 부식사양: KDP-6A
7. 제품내 함유된 6대 유해물질(납, 수은, 카드뮴, 6가크롬, PBBs, PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

NOTE

1. UNLESS OTHERWISE SPECIFIED ALL RADIUS TO BE 0.3 RADIUS.
2. UNLESS OTHERWISE SPECIFIED ALL CHAMFERS TO BE 0.3 CHAMFER.
3. MUST BE FREE OF FLASH, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
4. APPLICABLE HOUSING: MG656798
5. KEY MARK: TAPER 15° (H: 0.1~0.2, SIZE: 1.5)
CAVITY NO.: TAPER 0° (H: 0.1~0.2, SIZE: 2.0)
6. HOUSING ETCHING SPEC: KDP-6A
7. 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD, MERCURY, CADMIUM, HEXAVALENT CHROMIUM, PBBs, PPDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

APPROVED

2016-02-26

KOREA ELECTRIC
TERMINAL CO., LTD.
Korea Electric Te
rminal Co., LTD.

ISSUE MARK

NO.	MATERIAL	COLOR
0	P B T	NATURAL
1		RED
2		BLUE
20		JADE
3		YELLOW
4		GRAY
40		DARK GRAY
41		LIGHT GRAY
* 5		BLACK
6		DARK GREEN
7		BROWN
8		LIGHT GREEN
9		MAGENTA
11		ORANGE

					MATERIAL	SEE TABLE	 KOREA ELECTRIC TERMINAL CO., LTD.		
					FINISH	SEE TABLE			
					WIRE RANGE	-		CLASS	SEE NOTE
					INSULATION	-		TYPE	025/060/110
	검보 할력에 따른 도면 제작성	KSJ	KMH	BIN	'16.01.15	TOLERANCE EXCEPT AS NOTED	SCALE 1/1	PART NO. MG635751	
LTR	REVISION RECORD	DR.	CHK.	APP.	DATE				
DR,	KSJ 2015.07.27	CHK,	KMH 2015.07.27						
CHK,		APP,	BIN 2015.07.27						
						PART_NAME	025060110 48F LEVER		