

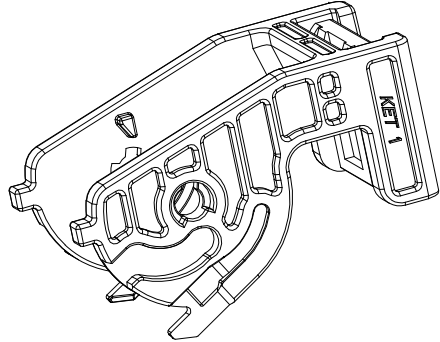
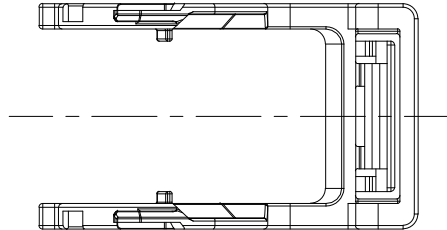
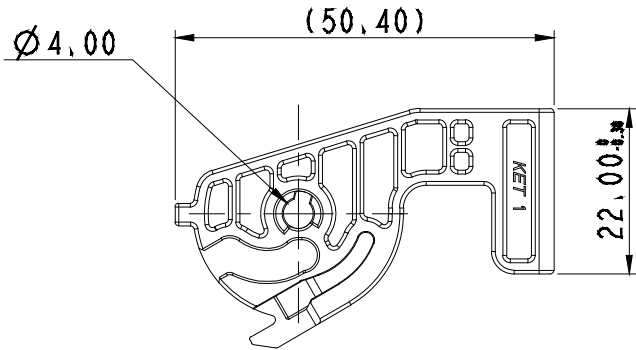


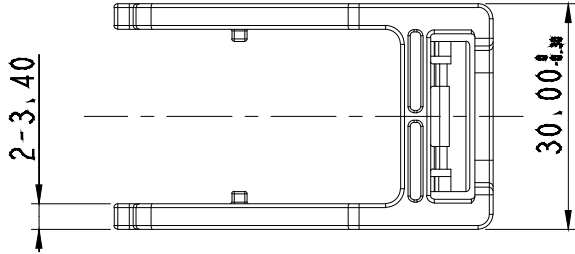



ISO VIEW



GENERAL TOLERANCE (HOUSING)

10 MAX	30 MAX	50 MAX	70 MAX	100 MAX	120 MAX	250 MAX	250 VR	ANGLE	ECCENT	USED ON
±0.15	±0.2	±0.3	±0.4	±0.5	±0.75	±0.9	±1.4	±30°	0.1	

- 주 기
1. 지시하지 않은 반경 R은 0.3로 한다.
 2. 지시하지 않은 모따기 C는 0.3으로 한다.
 3. 기능상 유해한 BURR 및 WELDLINE 등이 없을 것.
 4. 적용 HOUSING: MG656799
 5. KET 문자 : 기울기 15° (H: 0.1~0.2, SIZE: 2.0)
CAVITY NO. : 기울기 0° (H: 0.1~0.2, SIZE: 2.0)
 6. HOUSING 표면 부식사양 : KDP-6A
 7. 제품내 함유된 6대 유해물질(납, 수은, 카드뮴, 6가크롬, PBBs, PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

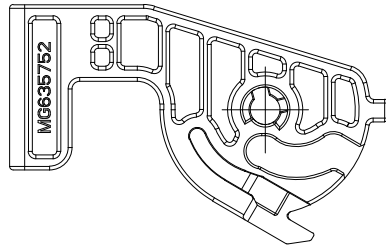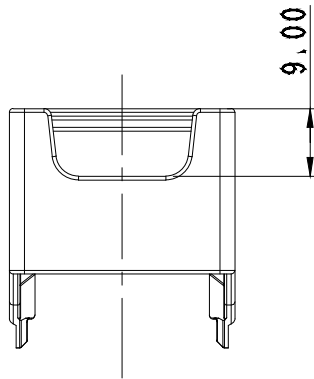

- NOTE
1. UNLESS OTHERWISE SPECIFIED ALL RADIUS TO BE 0.3 RADIUS.
 2. UNLESS OTHERWISE SPECIFIED ALL CHAMFERS TO BE 0.3 CHAMFER.
 3. MUST BE FREE OF FLASH, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
 4. APPLICABLE HOUSING: MG656799
 5. KEY MARK : TAPER 15° (H: 0.1~0.2, SIZE: 2.0)
CAVITY NO. : TAPER 0° (H: 0.1~0.2, SIZE: 2.0)
 6. HOUSING ETCHING SPEC : KDP-6A
 7. 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD, MERCURY, CADMIUM, HEXAVALENT CHROMIUM, PBBs, PPDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

APPROVED

2016-03-11

KOREA ELECTRIC
TERMINAL CO., LTD.
Korea Electric Te
rminal Co., LTD.

ISSUE MARK

MATERIAL SEE TABLE

FINISH SEE TABLE

WIRE RANGE -

INSULATION -

TOLERANCE
EXCEPT
AS NOTED SEE TABLE

SCALE
1/1

PART_NAME

025060 68F LEVER

KIET KOREA ELECTRIC
ENGINEERED TERMINAL CO., LTD.

CLASS SEE NOTE

TYPE 025/060

PART NO. MG635752

NO.	MATERIAL	COLOR
0	P B T	NATURAL
1		RED
2		BLUE
20		JADE
3		YELLOW
4		GRAY
40		DARK GRAY
41		LIGHT GRAY
* 5		BLACK
6		GREEN
7		BROWN
8		LIGHT GREEN
9		MAGENTA
11		ORANGE

△	검토 합격에 따른 도면 제작성	WDH	KMH	BIN	16.02.04
LTR	REVISION RECORD	DR,	CHK,	APP,	DATE
DR,	WDH 2015.07.15	CHK,	KMH 2015.07.15		
CHK,		APP,	BIN 2015.07.15		