

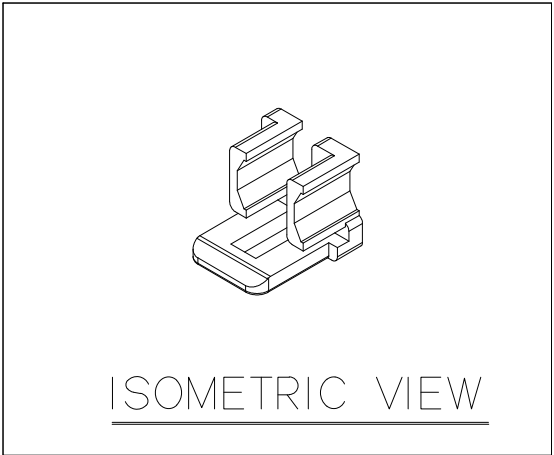



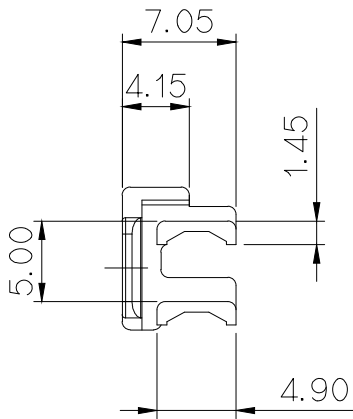

ISOMETRIC VIEW



NO.	COLOR
0	NATURAL
1	RED
2	BLUE
3	YELLOW
5	BLACK



*

주 기

- 1.지시하지 않은 반경 R은 0.3으로 한다.
- 2.지시하지 않은 모따기 C는 0.3으로 한다.
- 3.기능상 유해한 BURR 및 WELDLINE등이 없을것.
- 4.적용 하우징 : MG615603
- 5.제품 내 함유된 6대 유해물질 (납, 수은, 카드뮴, 6가 크롬, PBBs, PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용농도를 초과해서는 안 된다.

NOTE

1. UNLESS OTHERWISE SPECIFIED ALL RADIUS TO BE 0.3 RADIUS.
2. UNLESS OTHERWISE SPECIFIED ALL CHAMFERS TO BE 0.3 CHAMFER.
3. MUST BE FREE OF BURR, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
4. APPICABLE HOUSING : MG615603
5. 6HAZARDOUS SUBSTANCES IN PARTS (Lead, Mercury, Cadmium, Hexavalent Chromium, PBBs, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION



APPROVED

2016-03-11

KOREA ELECTRIC
TERMINAL CO., LTD.
Electronic Produc
t Development Team

ISSUE MARK

					MATERIAL		PBT(V0)	 KOREA ELECTRIC TERMINAL CO., LTD.	
					FINISH		SEE TABLE		
					WIRE RANGE		CLASS		
					INSULATION		TYPE		110 P-LOCK
LTR	REVISION RECORD		DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED	SCALE	PART NO.
	DR.	SMG. 15. 10. 30		CHK. PSH. 15. 10. 30			SEE TABLE	5/1	MG635756
	CHK.	KSH. 15. 10. 30		APP. BUC. 15. 10. 30			PART NAME		
							110 P-Lock 2P REAR HOLDER (P5.0mm)		