

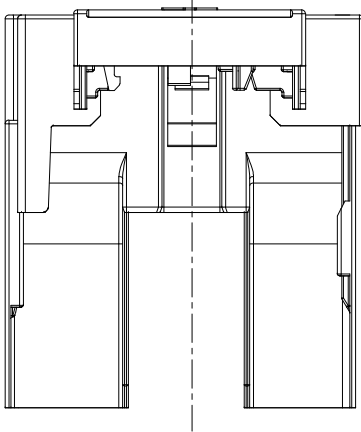
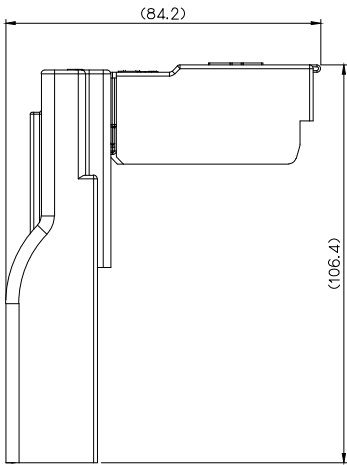
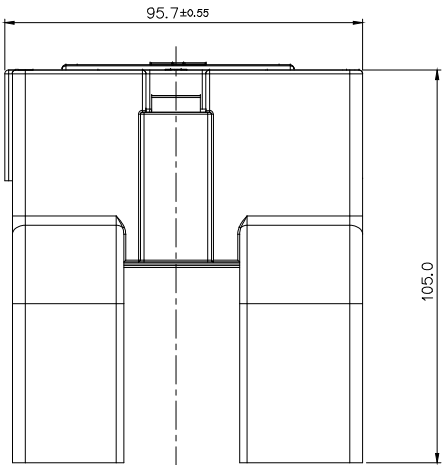
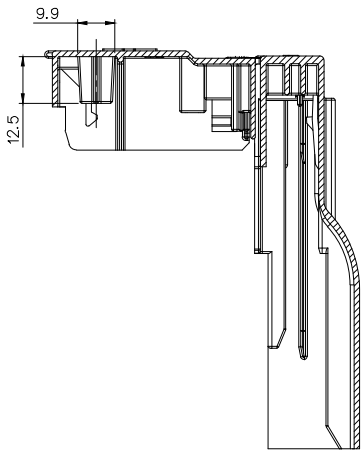
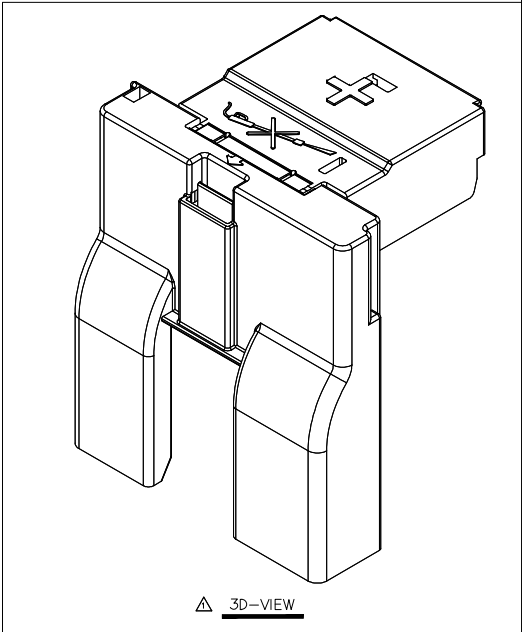
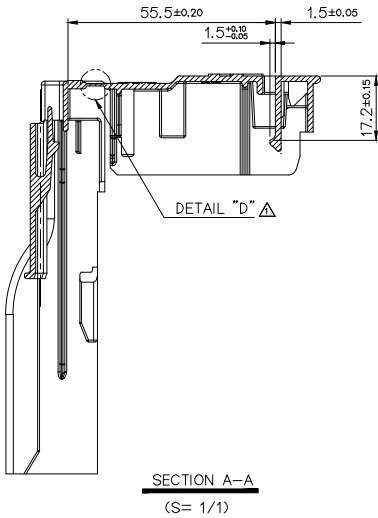
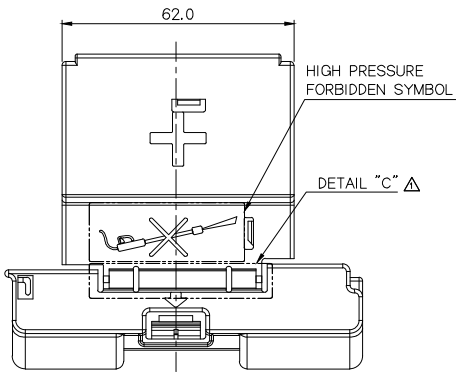



GENERAL TOLERANCE (HOUSING)							USED ON
10MAX	50MAX	100MAX	250MAX	250VR	ANGLE	ECCENT	
±0.2	±0.3	±0.55	±0.95	±1.4	±30°	0.1	

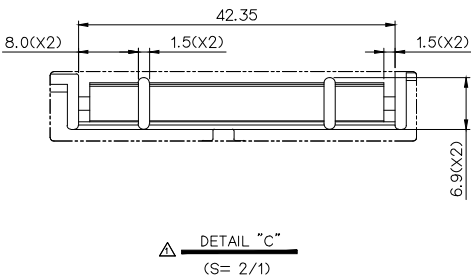

- 주 기
- 1.지시하지 않은 반경 R은 0.5±0.2로 한다
 - 2.기능상 유해한 BURR 및 WELDLINE등이 없을것.
 - 3.적용 MAIN BODY ASSEMBLY : MG665182 (BFT 4P)

- NOTE
1. UNLESS OTHERWISE SPECIFIED ALL RADIUS TO BE 0.5±0.2 RADIUS.
 2. MUST BE FREE OF BURR, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
 3. APPLICABLE MAIN BODY : MG665182 (BFT 4P)

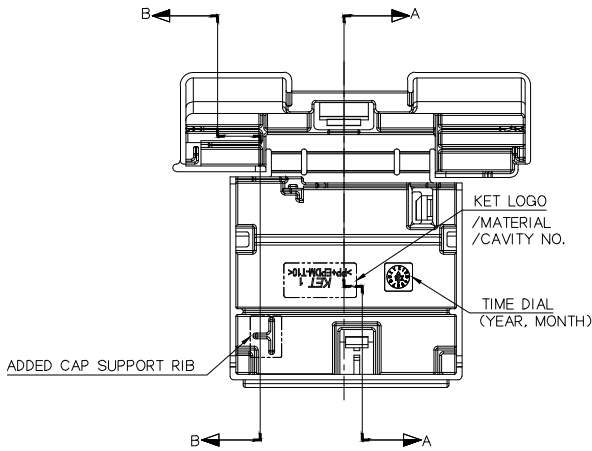

NO.	PART NAME	MATERIAL	FINISH	LTR	REVISION RECORD	DR	CHK	APP.	DATE	CHK	APP.	MATERIAL	PP+EPDM-T10	FINISH	RED	WIRE RANGE	CLASS	FUSE	TYPE	M350	PART NO.	MG635757-1
1	BFT CAP	PP+EPDM-T10	RED	LTR	REVISION RECORD	DR	CHK	APP.	DATE	CHK	APP.	PART NAME	BFT CAP									

