
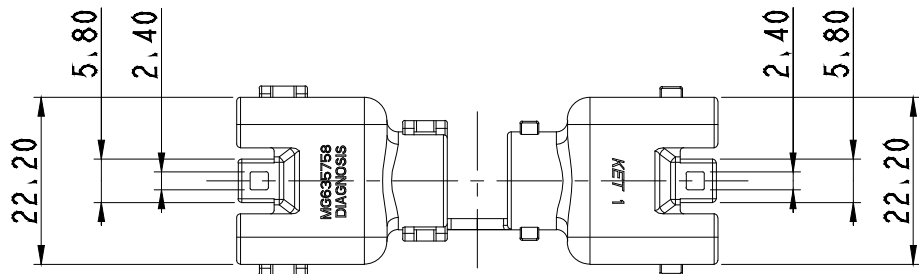

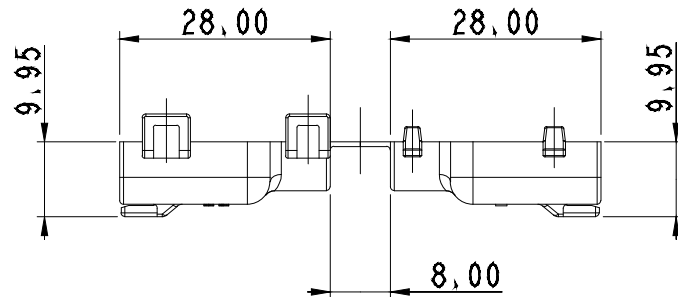
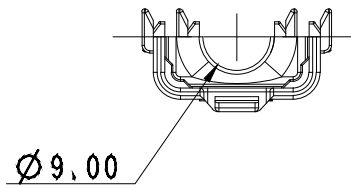


ISO VIEW

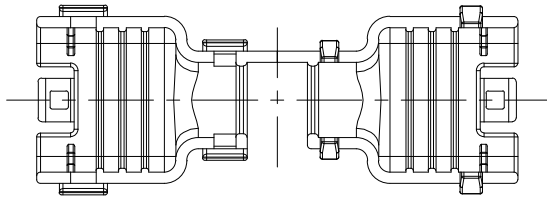

GENERAL TOLERANCE (HOUSING)

10 MAX	30 MAX	50 MAX	70 MAX	100 MAX	120 MAX	250 MAX	250 VR	ANGLE	ECCENT
±0.15	±0.2	±0.3	±0.4	±0.5	±0.75	±0.9	±1.4	±30°	0.1

USED ON

주 기

1. 기능상 유해한 BURR 및 WELDLINE 등이 없을 것,
2. 적용 HOUSING: MG656813
3. 제품내 함유된 6대 유해물질 (납, 수은, 카드뮴, 6가크롬, PBBs, PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다,

NOTE

1. MUST BE FREE OF FLASH, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
2. APPLICABLE HOUSING: MG656813
3. 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD, MERCURY, CADMIUM, HEXAVALENT CHROMIUM, PBBs, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

NO.	MATERIAL	COLOR
0	PA66	NATURAL
1		RED
2		BLUE
20		JADE
3		YELLOW
4		GRAY
40		DARK GRAY
41		LIGHT GRAY
* 5		BLACK
6		GREEN
7		BROWN
8		LIGHT GREEN
9		MAGENTA
11		ORANGE

APPROVED

2019-11-06

KOREA ELECTRIC
TERMINAL CO., LTD.
Korea Electric Te
rminal Co., LTD.

ISSUE MARK

					MATERIAL	SEE TABLE	KIET ENGINEERED	KOREA ELECTRIC TERMINAL CO., LTD.
					FINISH	SEE TABLE		
					WIRE RANGE	-	CLASS	-
					INSULATION	-	TYPE	-
△	검사성적서 합격에 따른 도면 제작성	KSJ	KMH	BIN	16.02.24			
LTR	REVISION RECORD	DR,	CHK,	APP,	DATE	TOLERANCE EXCEPT AS NOTED	SCALE 1/1	PART NO.
DR,	WDH 2015.09.02	CHK,	KMH 2015.09.03					MG635758
CHK,		APP,	BIN 2015.09.03			PART_NAME	DIAGNOSIS 6F WIRE COVER	