

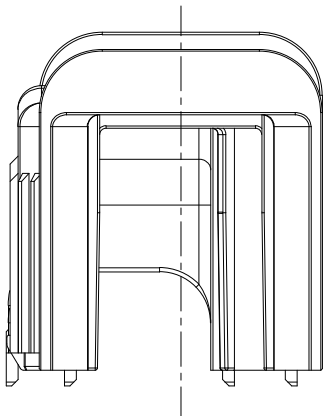


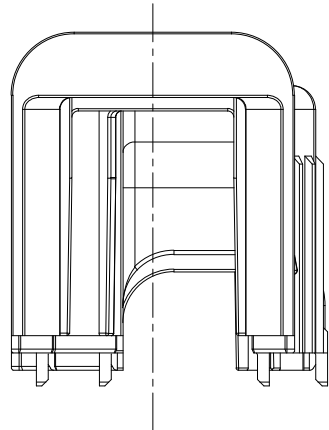

NO.	MATERIAL	COLOR
0	P P	NATURAL
1		RED
2		BLUE
20		JADE
3		YELLOW
4		GRAY
40		DARK GRAY
41		LIGHT GRAY
5		BLACK
6		DARK GREEN
7		BROWN
8		LIGHT GREEN
9		MAGENTA
11	ORANGE	

1. UNLESS OTHERWISE SPECIFIED ALL RADIUS
TO BE 0.3 RADIUS.
2. UNLESS OTHERWISE SPECIFIED ALL CHAMFERS
TO BE 0.3 CHAMFER.
3. MUST BE FREE OF FLASH, WELDLINE
AND IMPERFECTION THAT AFFECT FUNCTION.
4. APPLICABLE MALE ASSY: MG645857
5. KET MARK : TAPER 15° (H; 0.1~0.2, SIZE; 1.5)
CAVITY NO. : TAPER 0° (H; 0.1~0.2, SIZE; 1.5)
6. HOUSING ETCHING SPEC : KDP-6A
7. 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD, MERCURY,
CADMIUM, HEXAVALENT CHROMIUM, PBBs, PBDEs) SHALL
NOT EXCEED THE MAXIMUM PERMISSIBLE
CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE
& RoHS REGULATION.

USED ON

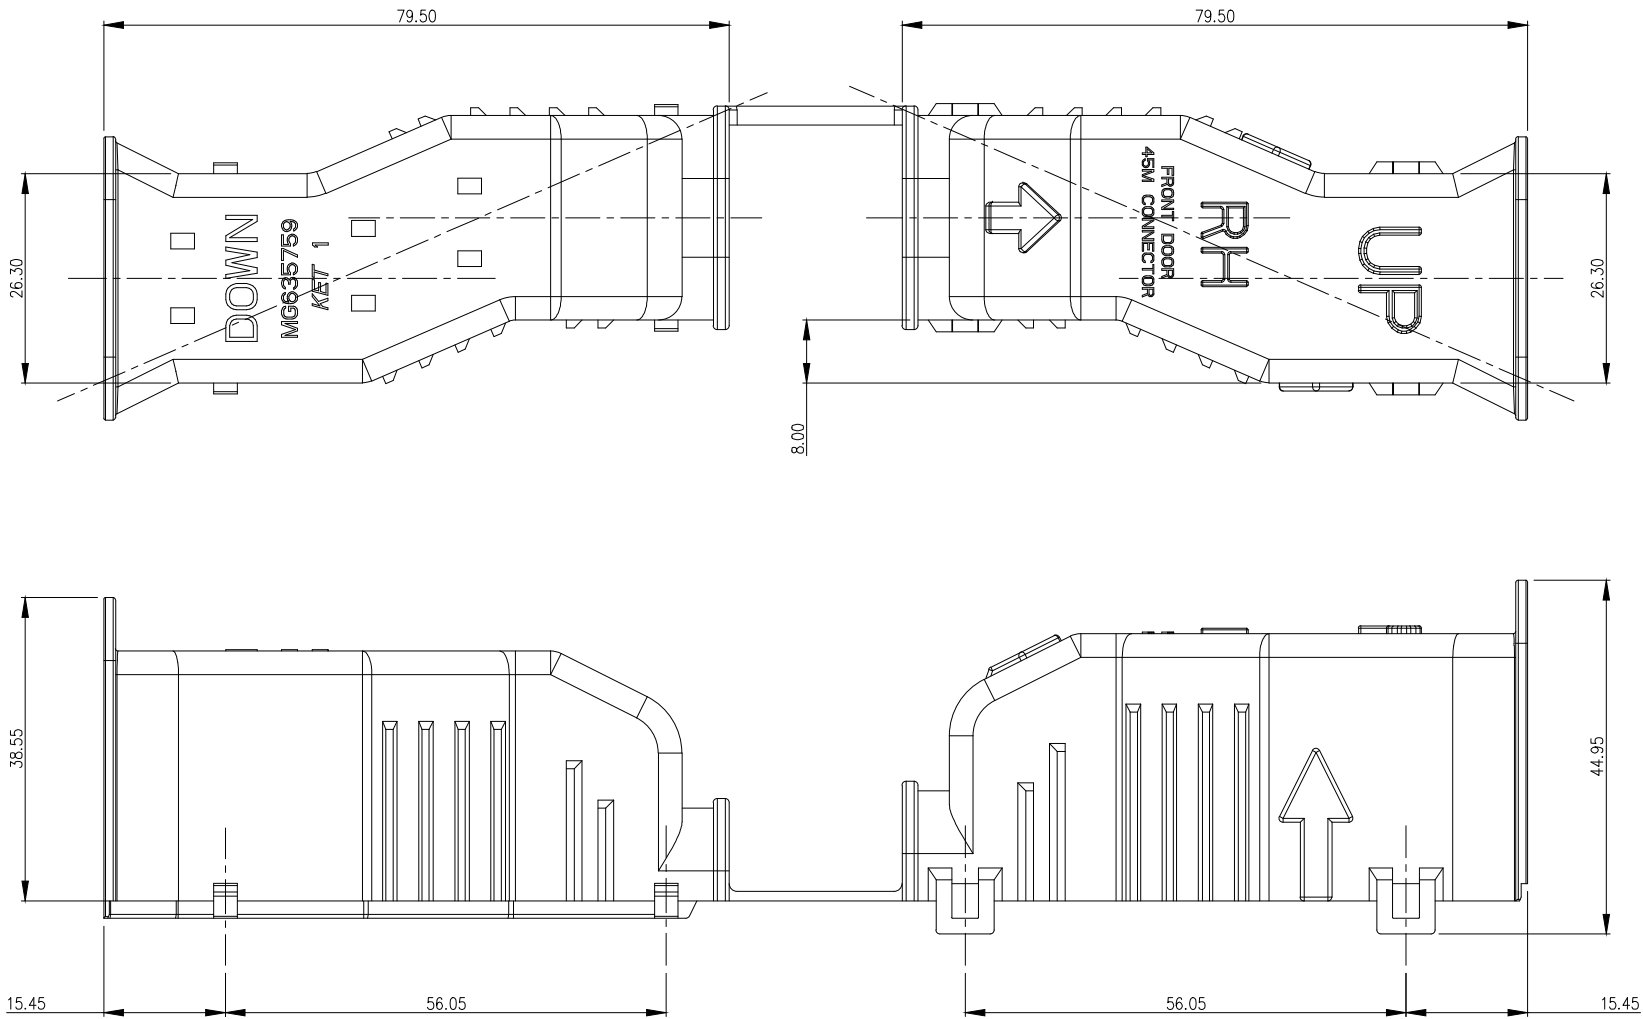

1. 지시하지 않은 반경 R은 0.3로 한다.
2. 지시하지 않은 모따기 C는 0.3으로 한다.
3. 기능상 유해한 BURR 및 WELDLINE 등이 없을 것.
4. 적용 MALE ASSY: MG645857
5. KET 문자: 기울기 15°(H; 0.1~0.2, SIZE; 1.5)
CAVITY NO. : 기울기 0°(H; 0.1~0.2, SIZE; 1.5)
6. HOUSING 표면 부식 사양: KDP-6A
7. 제품내 함유된 6대 유해물질 (납, 수은, 카드뮴, 6가크롬, PBBs, PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

ISSUE MARK

						MATERIAL	SEE TABLE	 KOREA ELECTRIC TERMINAL CO., LTD. APPROVED , 2019-11-06 KOREA ELECTRIC TERMINAL CO., LTD. Korea Electric Te rminal Co., LTD.	
						FINISH	SEE TABLE		
						WIRE RANGE	CLASS		
						INSULATION	TYPE		
							025/060/110/FAKRA		
LTR	REVISION RECORD		DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED	SCALE	PART NO.
DR.	LJW	2015.09.23	CHK.	KMH	2015.09.23		SEE TABLE	1/1	MG635759
CHK.			APP.	BIN	2015.09.23	PART_NAME			
						FRONT DOOR 45M WIRE COVER_(RH, 편심: 8.00mm)			

