
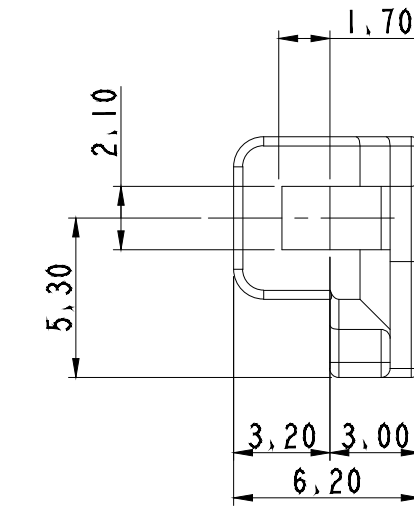
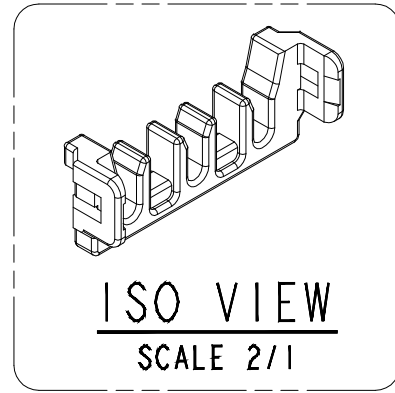
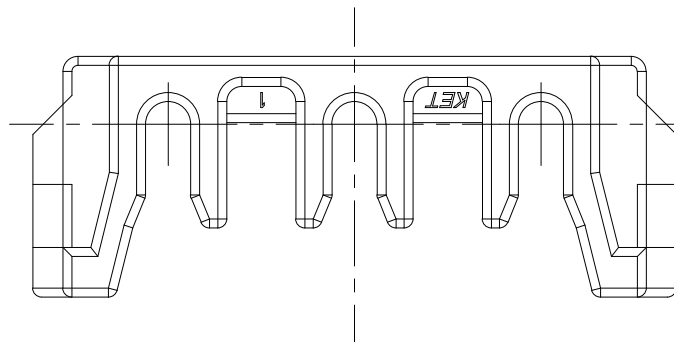
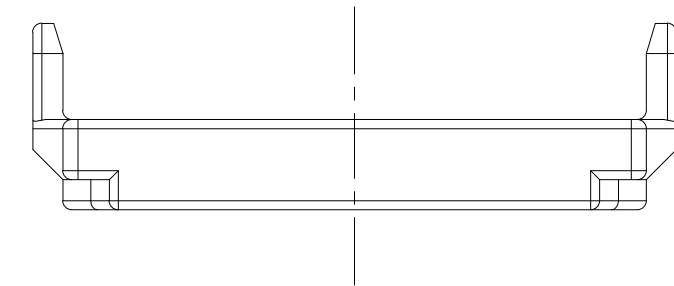
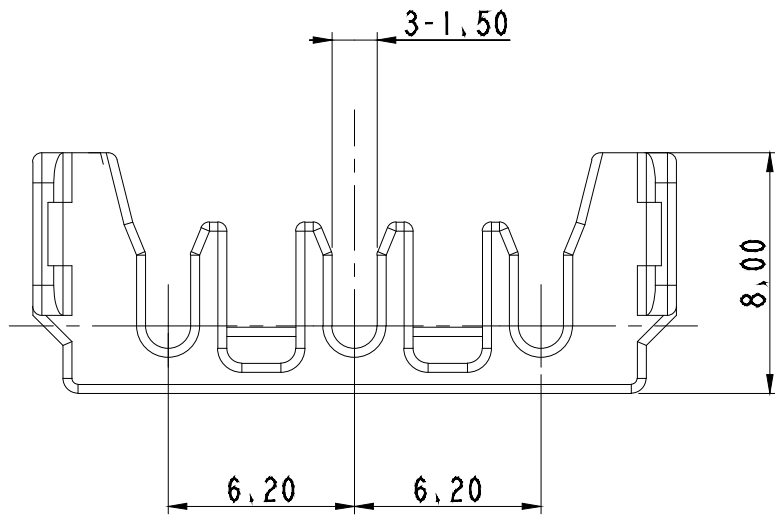


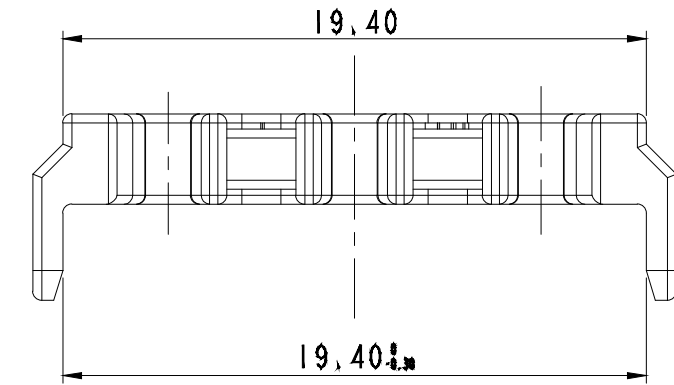

NOTE

1. UNLESS OTHERWISE SPECIFIED ALL RADIUS TO BE 0.3 RADIUS.
2. UNLESS OTHERWISE SPECIFIED ALL CHAMFERS TO BE 0.3 CHAMFER.
3. MUST BE FREE OF FLASH WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
4. THIS PART ASSEMBLES WITH MG615626 BY CUSTOMER
5. 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD, MERCURY, CADMIUM, HEXAVALENT CHROMIUM, PBBs, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

GENERAL TOLERANCE (HOUSING)

10 MAX	30 MAX	50 MAX	70 MAX	100 MAX	120 MAX	250 MAX	250 VR	ANGLE	ECCENT	USED ON
±0.15	±0.2	±0.3	±0.4	±0.5	±0.75	±0.9	±1.4	±30'	0.1	

NO.	PART NAME	PART NO.	MATERIAL	COLOR	Q'TY
1	09011 3F REAR HOLDER	MG635765-5	PA66	BLACK	1

주 기

1. 지시없는 R=0.3으로 한다.
2. 지시없는 C=0.3으로 한다.
3. 기능상 유해한 흠, 변형 및 BURR가 없을 것.
4. 본 부품은 MG615626과 사용자에 의해 조립된다.
5. 제품내 함유된 6대 유해물질 (납, 수은, 카드뮴, 6가크롬, PBBs, PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

APPROVED

2019-11-06

KOREA ELECTRIC
TERMINAL CO., LTD.
Korea Electric Te
rminal Co., LTD.

ISSUE MARK

					MATERIAL	SEE TABLE		
					FINISH	SEE TABLE		
					WIRE RANGE		CLASS	
					INSULATION		TYPE	09011
					TOLERANCE EXCEPT AS NOTED	SEE TABLE	SCALE 1/1	PART NO. MG635765-5
					DR.	CHK.	APP.	DATE
					CHK.	KMH 2015.10.30	APP.	BIN 2015.10.30
					PART_NAME	09011 3F REAR HOLDER		

KIET KOREA ELECTRIC
ENGINEERED TERMINAL CO., LTD.