

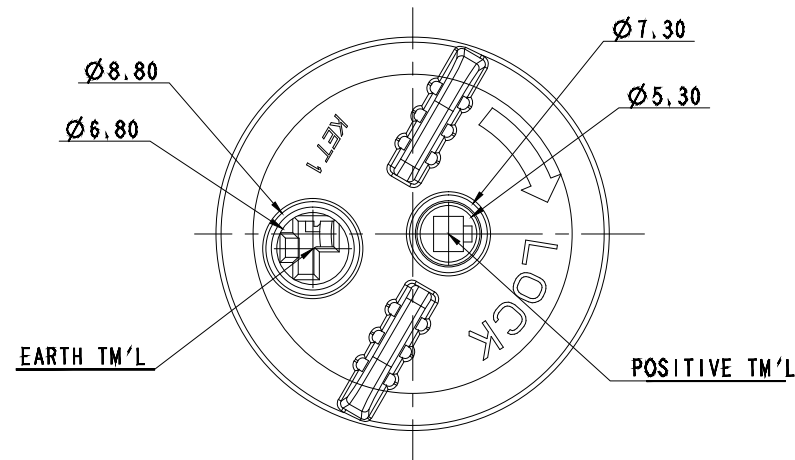
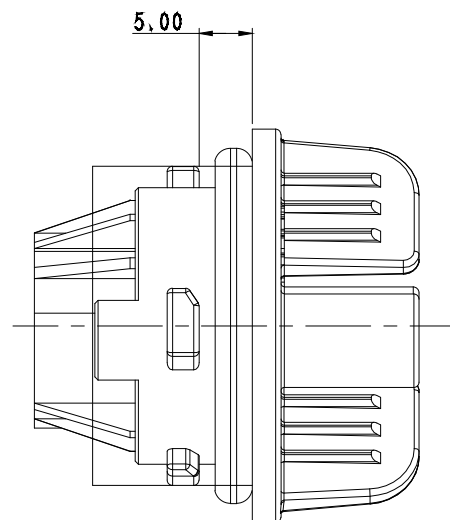
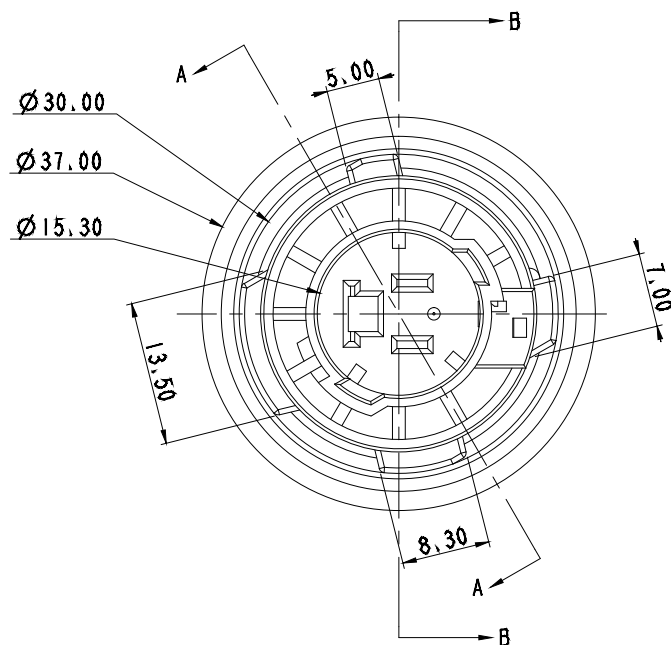


ISO VIEW

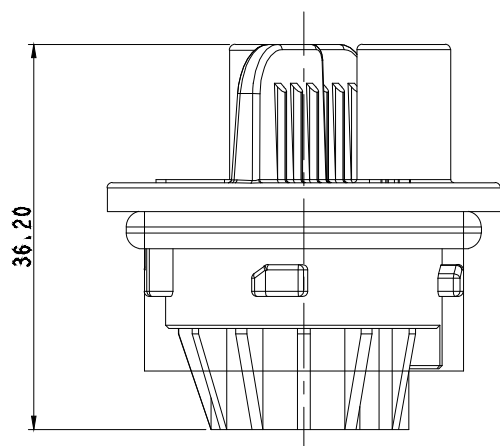

GENERAL TOLERANCE (SILICONE RUBBER)						GENERAL TOLERANCE (HOUSING)							USED ON
0 TO 6	6 TO 10	10 TO 18	18 TO 30	30 TO 50	50 TO 80	10 MAX	50 MAX	100 MAX	250 MAX	250 VR	ANGLE	ECCENT	
±0.4	±0.5	±0.6	±0.8	±1.0	±1.2	±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1	

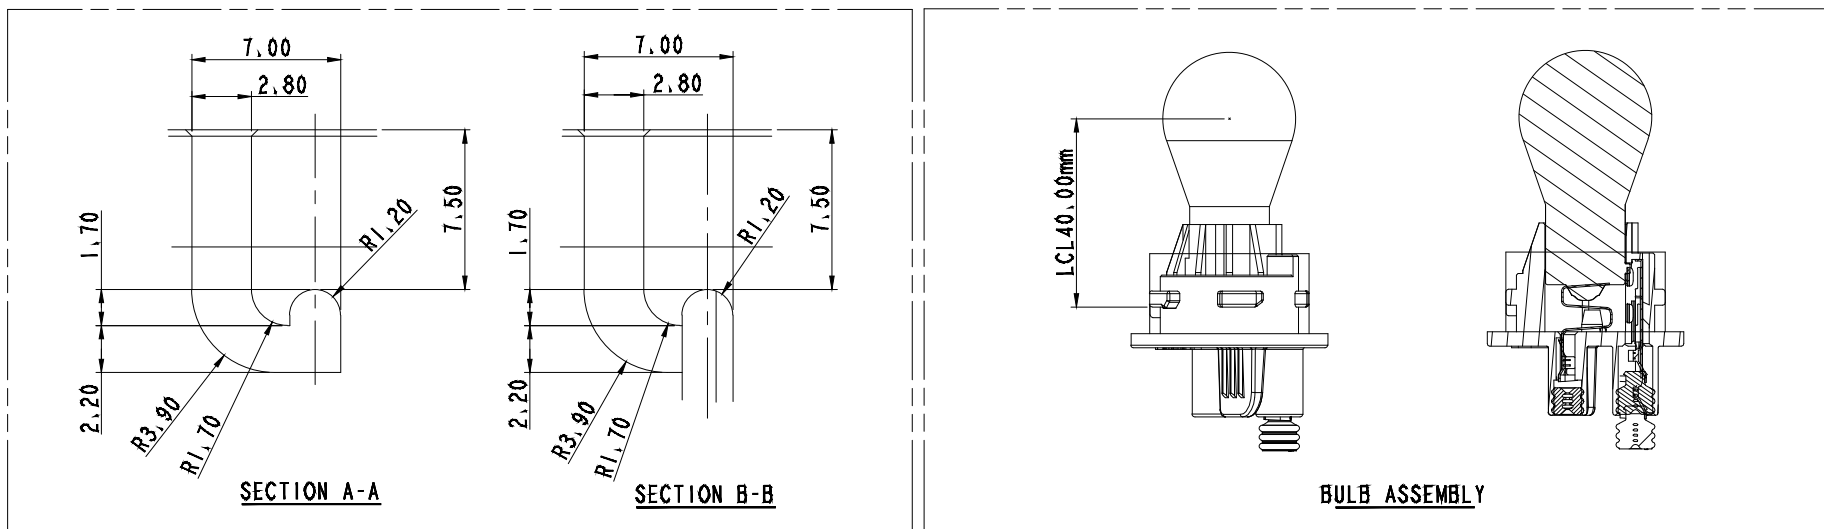

- 주 기
1. 기능상 유해한 BURR 및 WELDLINE 등이 없을 것,
 2. 적용 TERMINAL: ST781343-1(P), ST781344-1(E)
 3. 적용 WIRE SEAL: MG685413(P), MG685512(E)
 4. 제품내 함유된 6대 유해물질 (납, 수은, 카드뮴, 6가크롬, PBBs, PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다,

- NOTE
1. MUST BE FREE OF FLASH, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION,
 2. APPLICABLE TERMINAL: ST781343-1(P), ST781344-1(E)
 3. APPLICABLE WIRE SEAL: MG685413(P), MG685512(E)
 4. 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD, MERCURY, CADMIUM, HEXAVALENT CHROMIUM, PBBs, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

APPROVED

2019-11-05

KOREA ELECTRIC
TERMINAL CO., LTD.
Korea Electric Te
rminat Co., LTD.

ISSUE MARK

				MATERIAL	SEE TABLE	KIET ENGINEERED KOREA ELECTRIC TERMINAL CO., LTD.
				FINISH	SEE TABLE	
				WIRE RANGE		
				INSULATION		TYPE WP
LTR	REVISION RECORD	DR.	CHK.	APP.	DATE	PART NO. MG635771-7 N-RCL BULB SOCKET (SINGLE)
DR.	YDH 17, 03, 06	CHK.	LSY 17, 03, 06			
CHK.		APP.	SUK 17, 03, 06			
				SCALE	2/1	
				PART-NAME		