

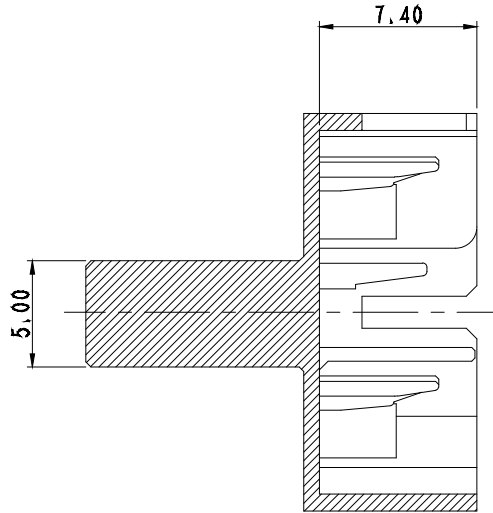
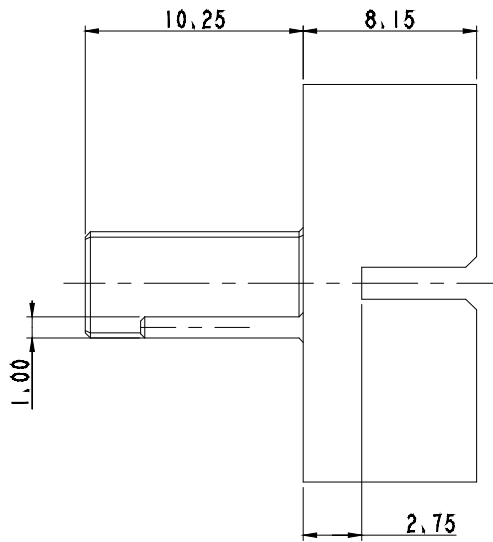
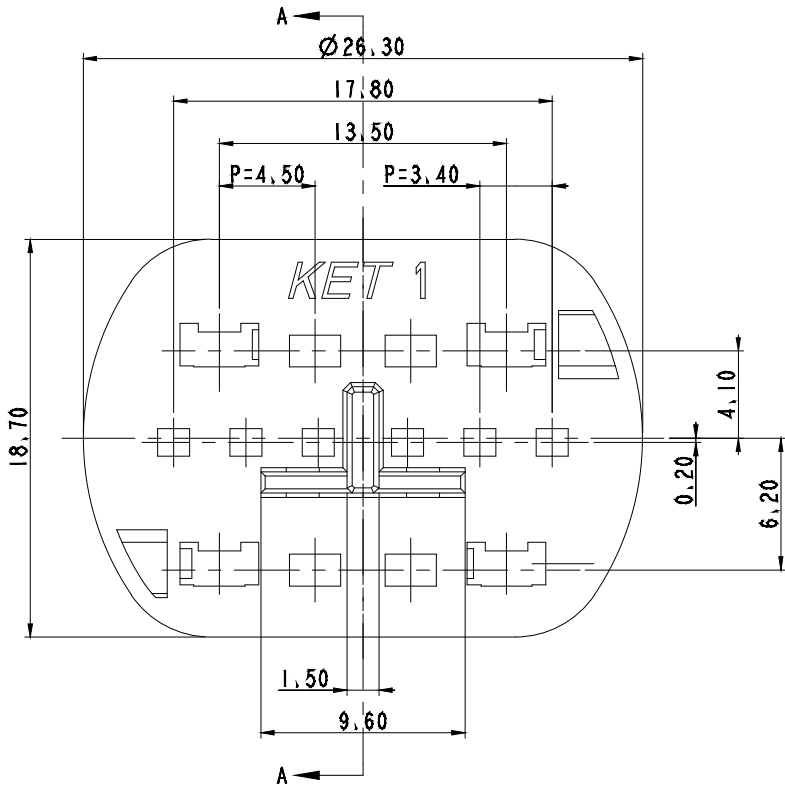


ISO VIEW

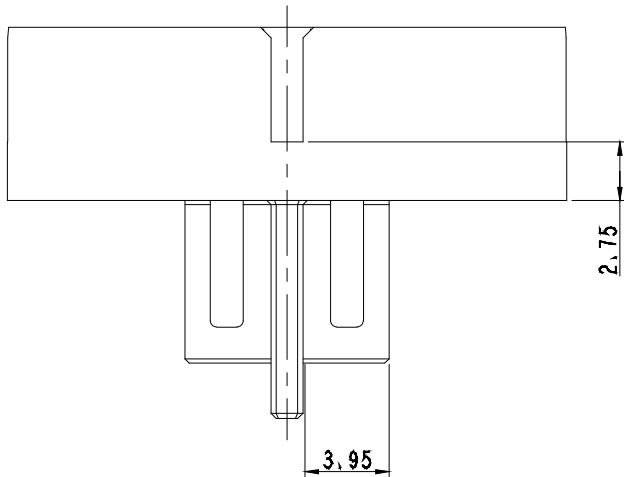

SECTION A-A

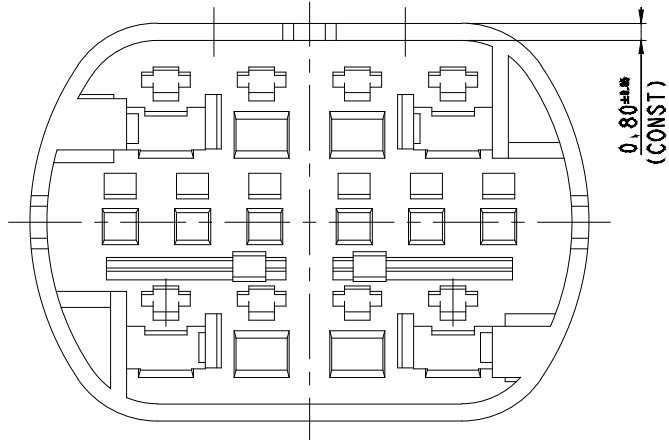

GENERAL TOLERANCE (HOUSING)										USED ON
10 MAX	30 MAX	50 MAX	70 MAX	100 MAX	120 MAX	250 MAX	250 VR	ANGLE	ECCENT	
±0.15	±0.2	±0.3	±0.4	±0.5	±0.75	±0.9	±1.4	±30'	0.1	

NO.	MATERIAL	COLOR
0	P B T	NATURAL
1		RED
2		BLUE
20		JADE
3		YELLOW
4		GRAY
40		DARK GRAY
41		LIGHT GRAY
5		BLACK
6		DARK GREEN
7		BROWN
8		LIGHT GREEN
9		MAGENTA
11		ORANGE

- 주
1. 지시하지 않은 반경 R은 0.5로 한다.
2. 지시하지 않은 C는 0.5로 한다
3. 기능상 유해한 BURR 및 WELDLINE등이 없을 것.
4. 적용 HS'G : MG646012-5
5. KET 문자 : 기울기 15° (H; 0.1~0.2, SIZE; 1.7)
CAVITY NO. : 기울기 0° (H; 0.1~0.2, SIZE; 1.7)
6. 제품내 함유된 6대 유해물질 (납,수은,카드뮴,6가크롬, PBBs,PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

- NOTES
1. UNLESS OTHERWISE SPECIFIED ALL RADIUS TO BE 0.5 RADIUS.
2. UNLESS OTHERWISE SPECIFIED ALL CHAMFERS TO BE 0.5 RADIUS.
3. MUST BE FREE OF FLASH, SINK AND IMPERFECTION THAT AFFECT FUNCTION.
4. APPLICABLE HS'G : MG646012-5
5. KET MARK : TAPER 15° (H; 0.1~0.2, SIZE; 1.7)
CAVITY NO. : TAPER 0° (H; 0.1~0.2, SIZE; 1.7)
6. 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD,MERCURY, CADMIUM,HEXAVALENT CHROMIUM,PBBs,PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

APPROVED

2019-11-05

KOREA ELECTRIC
TERMINAL CO., LTD.
Korea Electric Te
rminal Co., LTD.

ISSUE MARK

				MATERIAL	SEE TABLE	KIET KOREA ELECTRIC TERMINAL CO., LTD. ENGINEERED	
				FINISH	SEE TABLE		
				WIRE RANGE			
				INSULATION		CLASS	025,060
				SCALE	4/1	PART NO.	MG635779
				PART-NAME	C025060 WP HEAD LAMP 14M F/HOLDER		