



ISO VIEW

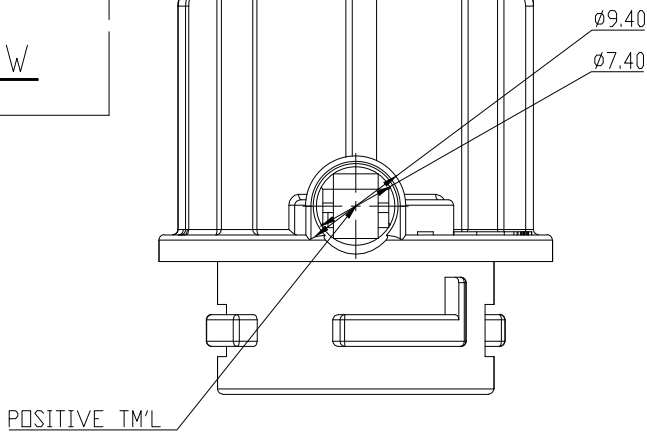


NOTE : PLUG HOLE 일반공차 ± 0.1

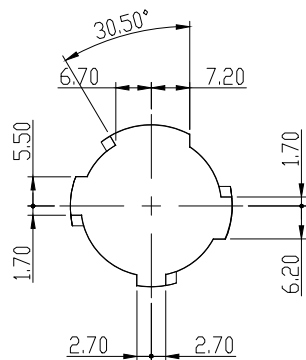

SOCKET PLUG HOLE


SCALE 1/1

“D”



DETAIL “D”

SCALE 1/1

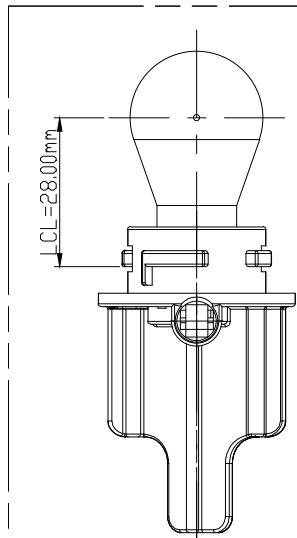


LCL DIM


SCALE 1/1

- 주 기
- 지시하지 않은 반경 R은 0.5로 한다.
 - 지시하지 않은 모따기 C는 0.5으로 한다.
 - 기능상 유해한 BURR 및 WELDLINE 등이 없을 것.
 - 적용 TERMINAL : ST760794(P), ST760795(E)
적용 WIRE SEAL : MG682027(P), MG682028(E)
 - 제품내 함유된 6대 유해물질 (납,수은,카드뮴,6가크롬, PBBs,PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.


- NOTE
- UNLESS OTHERWISE SPECIFIED ALL RADIUS TO BE 0.5 RADIUS.
 - UNLESS OTHERWISE SPECIFIED ALL CHAMFERS TO BE 0.5 CHAMFER.
 - MUST BE FREE OF FLASH, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
 - APPLICABLE TERMINAL : ST760794(P), ST760795(E)
APPLICABLE WIRE COVER : MG682027(P), MG682028(E)
 - 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD,MERCURY, CADMIUM,HEXAVALENT CHROMIUM,PBBs,PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

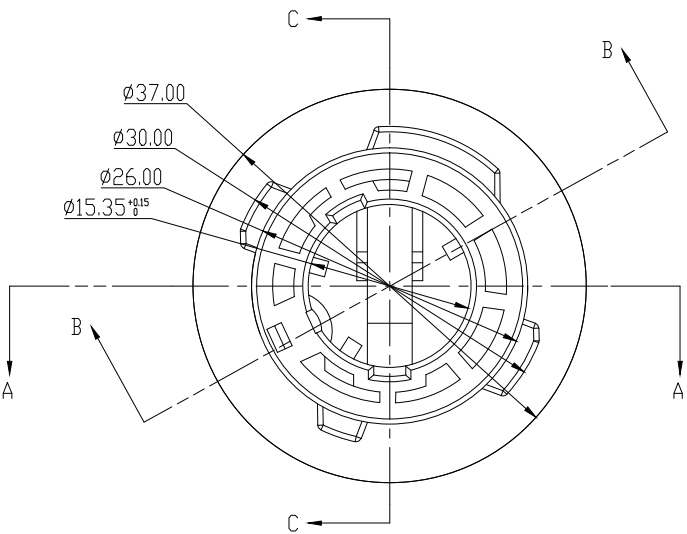


SECTION A-A

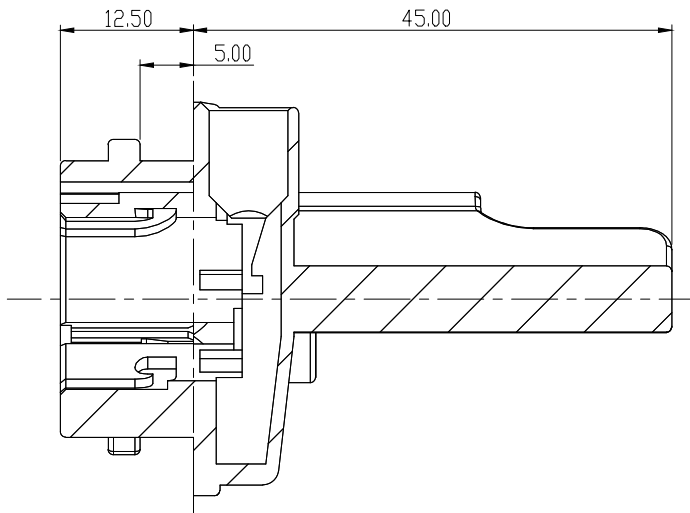


SECTION C-C

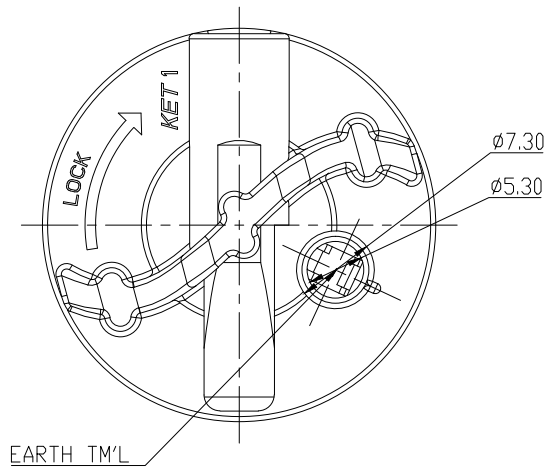

EARTH TM'L

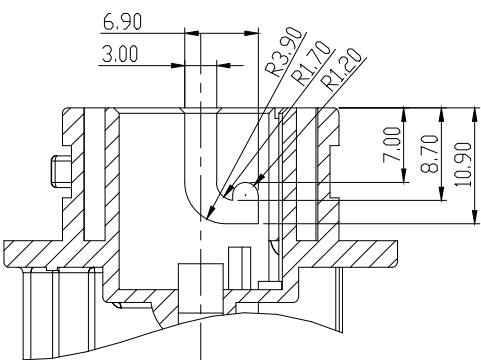

SECTION A-A

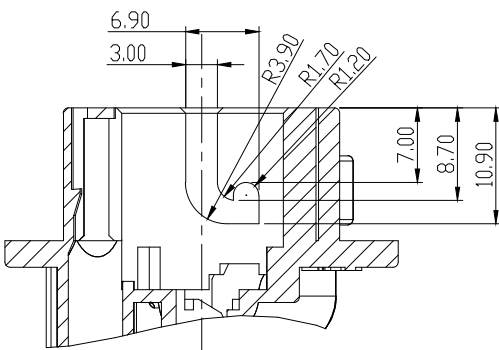

SECTION B-B

APPROVED

2019-11-06

KOREA ELECTRIC
TERMINAL CO., LTD.
Korea Electric Te
rminat Co., LTD.

ISSUE MARK

						MATERIAL	PA66+MR30%		
						FINISH	L/GRAY		
						WIRE RANGE	SEE TABLE		
						INSULATION	SEE TABLE		
LTR	REVISION RECORD	DR	CHK	APP	DATE	TOLERANCE EXCEPT AS NOTED	SEE TABLE	SCALE	2/1
DR	PSJ 2016.03.09	CHK				PART_NAME	TURN SIGNAL BULB SOCKET	PART NO.	MG635781-41
CHK		APP							