

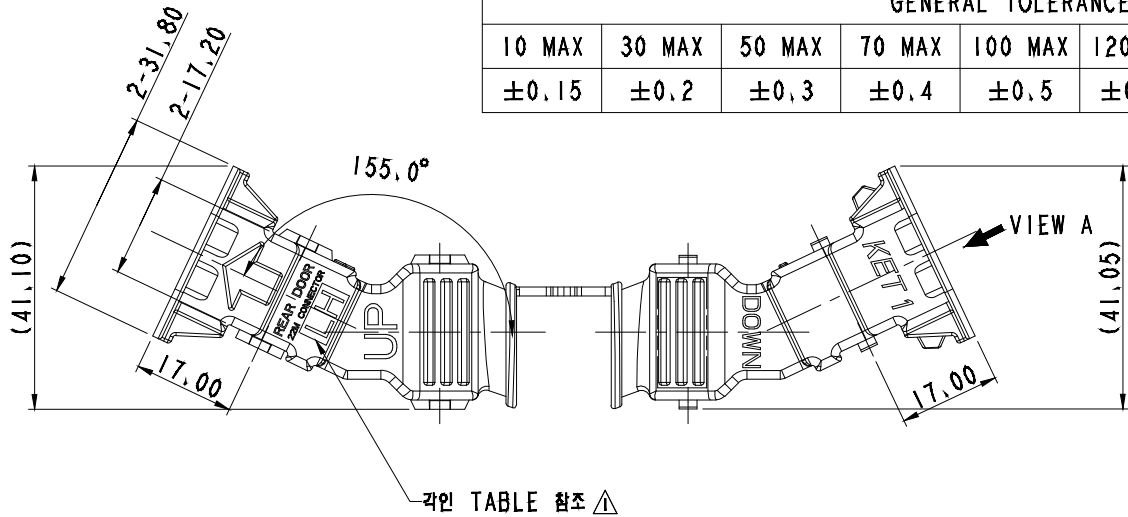
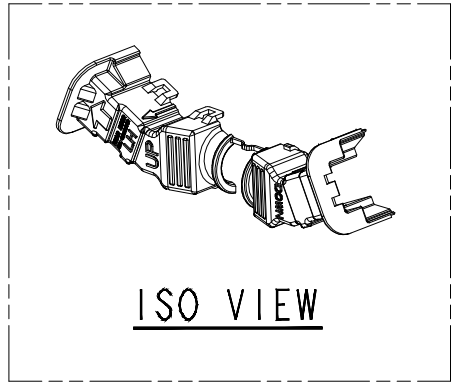
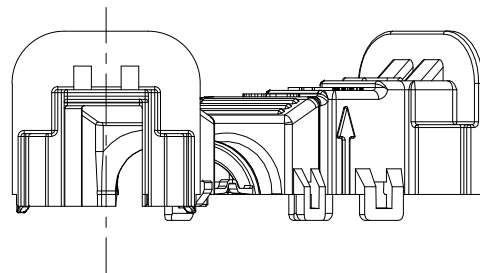


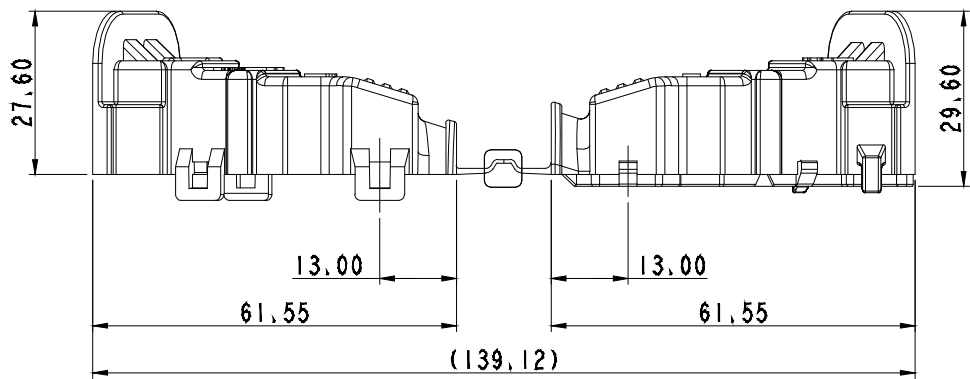

GENERAL TOLERANCE (HOUSING)										USED ON
10 MAX	30 MAX	50 MAX	70 MAX	100 MAX	120 MAX	250 MAX	250 VR	ANGLE	ECCENT	
±0.15	±0.2	±0.3	±0.4	±0.5	±0.75	±0.9	±1.4	±30'	0.1	

- 주
 1. 지시하지 않은 반경 R은 0.5로 한다.
 2. 지시하지 않은 모따기 C는 0.5으로 한다.
 3. 기능상 유해한 BURR 및 WELDLINE 등이 없을 것.
 4. 적용 MALE ASSY: MG646002
 5. KET 문자 : 기울기 15° (H; 0.1~0.2, SIZE; 1.5)
 CAVITY NO. : 기울기 0° (H; 0.1~0.2, SIZE; 1.5)
 6. HOUSING 표면 부식 사양: KDP-6A
 7. 제품내 함유된 6대 유해물질 (납,수은,카드뮴,6가크롬, PBBs,PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.



VIEW A

NO.	MATERIAL	COLOR
0	P P	NATURAL
1		RED
2		BLUE
20		JADE
3		YELLOW
4		GRAY
40		DARK GRAY
41		LIGHT GRAY
5		BLACK
6		DARK GREEN
7		BROWN
8		LIGHT GREEN
9		MAGENTA
11		ORANGE

- NOTE
 1. UNLESS OTHERWISE SPECIFIED ALL RADIUS TO BE 0.5 RADIUS.
 2. UNLESS OTHERWISE SPECIFIED ALL CHAMFERS TO BE 0.5 CHAMFER.
 3. MUST BE FREE OF FLASH, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
 4. APPLICABLE MALE ASSY: MG646002
 5. KET MARK : TAPER 15° (H; 0.1~0.2, SIZE; 1.5)
 CAVITY NO. : TAPER 0° (H; 0.1~0.2, SIZE; 1.5)
 6. HOUSING ETCHING SPEC : KDP-6A
 7. 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD,MERCURY, CADMIUM,HEXAVALENT CHROMIUM,PBBs,PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

PART NO.	PART NAME	FINISH	각인사양
MG635809-5	REAR DOOR 22M WIRE COVER LH	BLACK	LH
MG635848-41	REAR DOOR 22M WIRE COVER RH	LIGHT GRAY	RH

LTR	REVISION RECORD	DR	CHK	APP	DATE
DR	LCK '16.10.25	CHK	LJE '16.10.25		
CHK		APP	BIN '16.10.25		

MATERIAL	FINISH	WIRE RANGE	INSULATION	SCALE	PART NO.
				1/1	MG635809-5
REAR DOOR 22M WIRE COVER LH					

ISSUE MARK

