

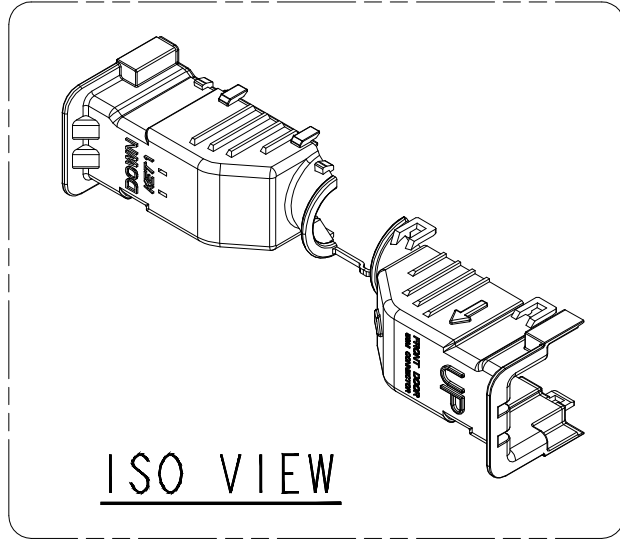


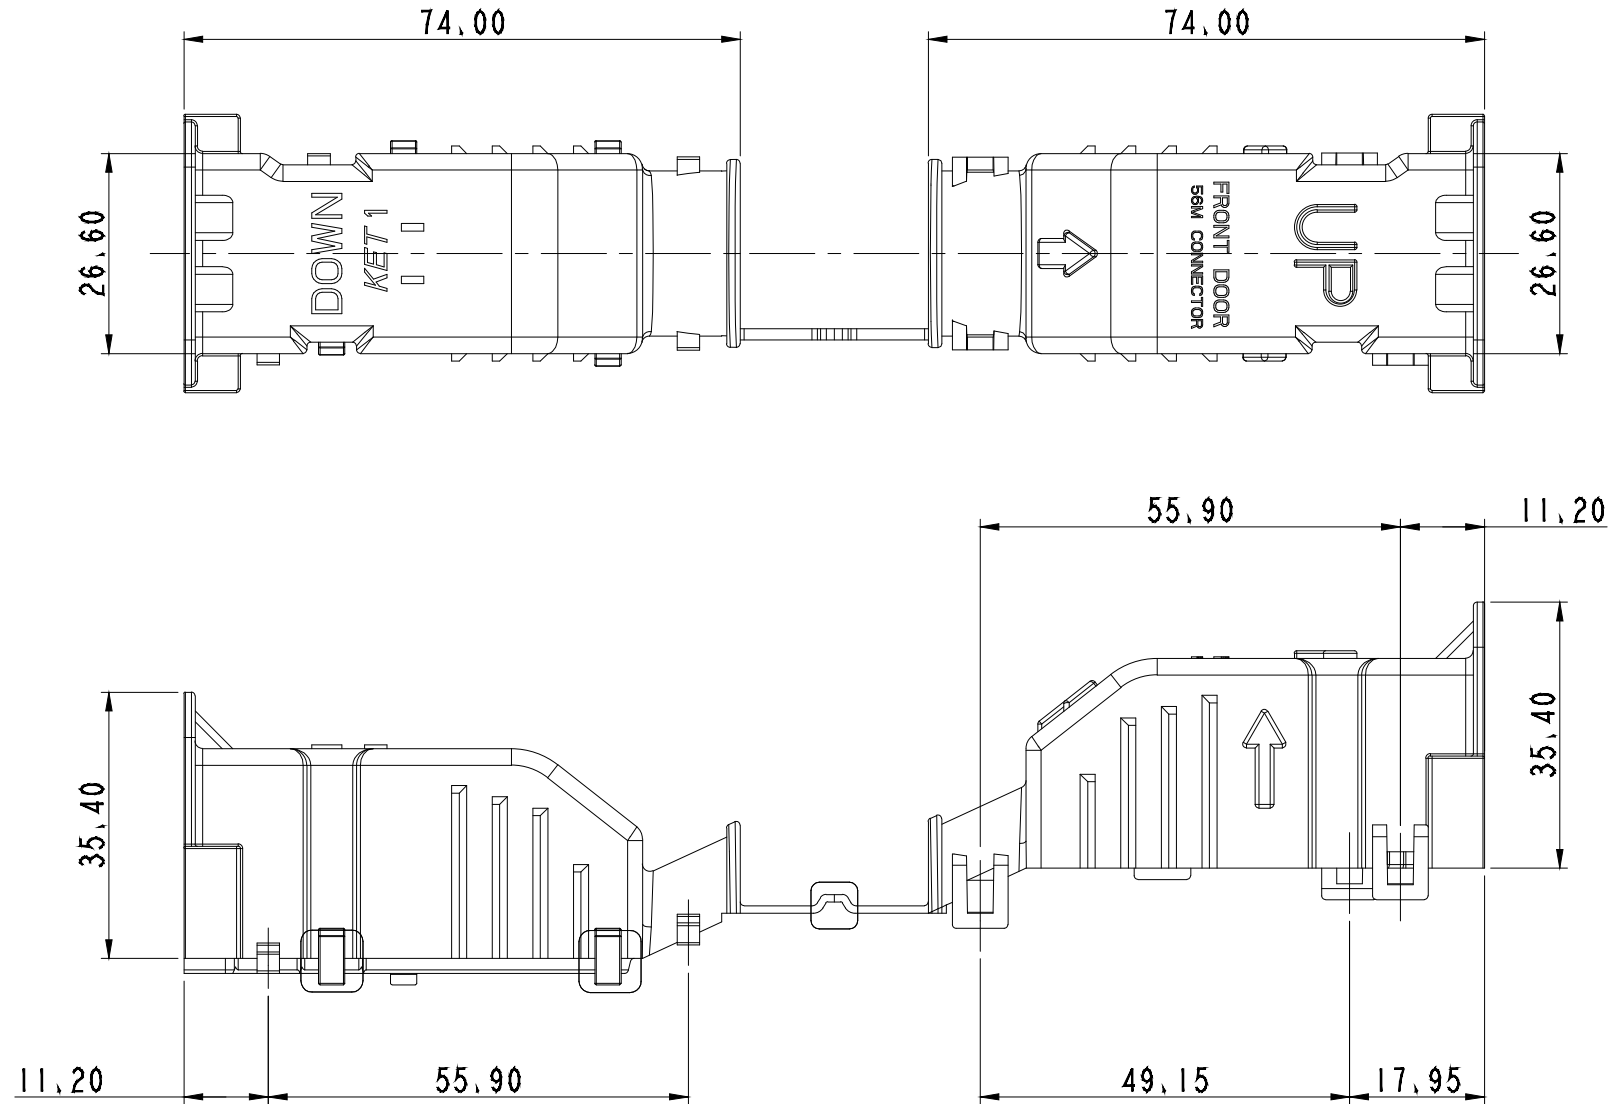

ISO VIEW

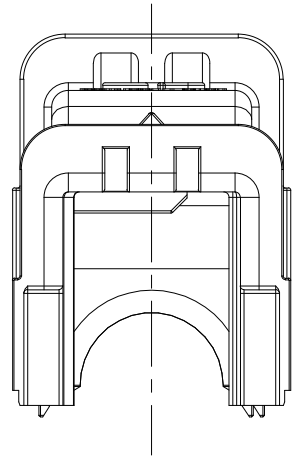

NO.	MATERIAL	COLOR
0	P P	NATURAL
1		RED
2		BLUE
20		JADE
3		YELLOW
4		GRAY
40		DARK GRAY
41		LIGHT GRAY
* 5		BLACK
6		DARK GREEN
7		BROWN
8		LIGHT GREEN
9		MAGENTA
11		ORANGE

NOTE

1. UNLESS OTHERWISE SPECIFIED ALL RADIUS TO BE 0.3 RADIUS,
2. UNLESS OTHERWISE SPECIFIED ALL CHAMFERS TO BE 0.3 CHAMFER,
3. MUST BE FREE OF FLASH, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION,
4. APPLICABLE MALE ASSY; MG646018-5
5. KET MARK ; TAPER 15° (H; 0.1~0.2, SIZE; 1.5) CAVITY NO. ; TAPER 0° (H; 0.1~0.2, SIZE; 1.5)
6. HOUSING ETCHING SPEC ; KDP-6A
7. 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD, MERCURY, CADMIUM, HEXAVALENT CHROMIUM, PBBs, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION,

GENERAL TOLERANCE (HOUSING)

10 MAX	30 MAX	50 MAX	70 MAX	100 MAX	120 MAX	250 MAX	250 VR	ANGLE	ECCENT
±0.15	±0.2	±0.3	±0.4	±0.5	±0.75	±0.9	±1.4	±30'	0.1

USED ON

주 기

1. 지시하지 않은 반경 R은 0.3로 한다,
2. 지시하지 않은 모따기 C는 0.3으로 한다,
3. 기능상 유해한 BURR 및 WELDLINE 등이 없을 것,
4. 적용 MALE ASSY; MG646018-5
5. KET 문자 ; 기울기 15° (H; 0.1~0.2, SIZE; 1.5) CAVITY NO. ; 기울기 0° (H; 0.1~0.2, SIZE; 1.5)
6. HOUSING 표면 부식 사양; KDP-6A
7. 제품내 함유된 6대 유해물질 (납, 수은, 카드뮴, 6가크롬, PBBs, PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다,

APPROVED

2019-11-05

KOREA ELECTRIC
TERMINAL CO., LTD.
Korea Electric Te
rminal Co., LTD.

ISSUE MARK

						MATERIAL		KIET ENGINEERED KOREA ELECTRIC TERMINAL CO., LTD.			
						FINISH					
						WIRE RANGE		CLASS			
						INSULATION		TYPE			
0 도면(개별->일반) ECO-1709-252문기 도면 제작실		KJC	L1M	SUK	17.09.19						
LTR	REVISION RECORD		DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED	SEE TABLE	SCALE 1/1	PART NO.	MG635811-5
DR.		LCK '16.10.25		CHK.		LJE '16.10.25		PART_NAME			FRONT DOOR 56M WIRE COVER (LONG TYPE)
CHK.				APP.		BIN '16.10.25					

도면(개별->일반)
ECO-1709-2522개 도면 제작
KJC LIM SUX 17.09.19

LTR REVISION RECORD DR, CHK, APP, DATE

DR, LCK '16.10.25 CHK, LJE '16.10.25

CHK, APP, BIN '16.10.25